



TRUCK & BUS TIRES

TECHNICAL CATALOGUE



2025
ATLAS TIRES

www.atlastire.cn

COMPANY INTRODUCTION

ATLAS TIRE



Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales.

Founded in 1975, the company has seven R&D centers, seven manufacturing bases across the world currently and over 17,783 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets.

Including **LINGLONG**, **ATLAS**, **LEAO** and **EVOLUXX** etc. Linglong Tire had successful access to the A share market on July 6, 2016.



In the future, the company will fully implement its global layout, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

en.linglong.cn



ATLAS TIRES

www.atlastire.cn

BRAND VALUE

It strengthens the retail network construction, with nearly

200,000

marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers.

Linglong's brand value reached

98.137

Billion RMB in 2024.

Linglong has sponsored over

100

sports events and teams worldwide

Abundant sports marketing sponsorship

such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



ATLAS TIRES

www.atlastire.cn

GLOBAL LAYOUT

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern.




R&D Center in America


R&D Center in Germany

Serbia


Linglong International Europe d.o.o.Zrenjanin

R&D Center

- R&D Center in Zhaoyuan and Yantai
- R&D Center in Beijing
- R&D Center in Shanghai
- R&D Center in jinan



Linglong Tyre Co.,Ltd.

- jilin Linglong Tyre co.,Ltd.
- Shandong Linglong Tyre Co.,Ltd.
- Dezhou Linglong Tyre Co.,Ltd.
- Shaanxi Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co.,Ltd.
- Guangxi Linglong Tyre Co.,Ltd.
- Anhui Linglong Tyre Co.,Ltd.


Linglong International Tyre(Thailand)Co.,Ltd

7+5 STRATEGIC GLOBAL POSITIONING

In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia. Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.

SOCT--STRESS OPTIMIZATION CONTROL TECHNOLOGY

New structure

Four belt structure to optimized grounding pressure distribution.wear and anti-groove crack upgrade

New Compound

Using a new type of nanoscale low hysteresis loss composite material
(Ensure wear and lower rolling resistance)

New cord material

UT ultra-high strength wire and reinforced structure
(to ensure safety and service life)

New profile and pattern

Account rolling resistance,wet grip and noise performance



ATLAS TIRES

www.atlastire.cn

CATALOGUE

WELCOME TO ATLAS TIRES

LONG HAUL 11

REGIONAL 31

LIGHT TRUCK 49

ON&OFF ROAD 59

COACH&URBAN 71



LONG HAUL

PAGE 11 ~ 30

EcoLine D11	13	EcoLine D11+	15	EcoLine S11	17
EcoLine S11 +	19				
AS01	21	AD01	21	AT13E	22
STRD-09	23	STRD-09e+	23	DRV-09	24
DRV-09e+	24	STRD-09e+II	25	TR-09	25
TR-09e+	26	DRV-98	26	TR-98	27
TRW-02	27	TRW-03	28	DRV-29e+	28
LDH10	29	LSH10	29	LTH1	30

EcoLine D11 EcoLine D11+ EcoLine S11 EcoLine S11 +



EcoLine D11

Size	Load index& Speed symbols	PR	Load Range	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual lbs	psi	Single lbs	psi			
295/75R22.5	144/141L	14	G	5675	110	6175	110	40.39	11.73	30
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.39	11.73	30



DRIVE

ORIGIN: THAILAND

HOT


EcoLine D11

TREAD DESIGN

GOOD WET GRIP

GOOD GRIP

RESISTANCE

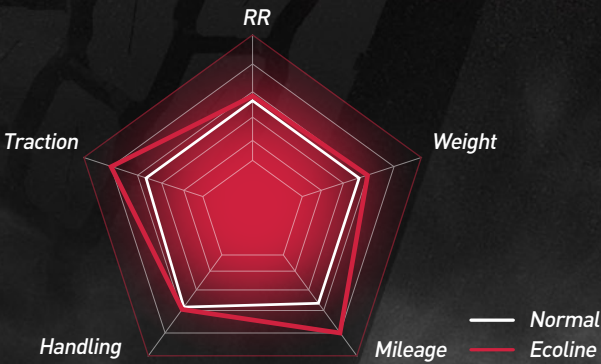

- 1 Closed shoulder promoted uniform wear and improved rolling resistance
- 2 Z-Zag groove provides good traction performance
- 3 Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread
- 4 Exclusive velvet knurled font design for the high-end series, offering a more premium texture



EcoLine D11+

Size	Load index& Speed symbols	PR	Load Range	Max load and Max Air (lbs&psi)		Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual lbs	Single psi			
295/75R22.5	144/141L	14	G	5675	110	6175	110	40.39
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.39



DRIVE

ORIGIN: THAILAND

HOT


EcoLine D11+

TREAD DESIGN


GOOD WET GRIP

GOOD GRIP

MILEAGE

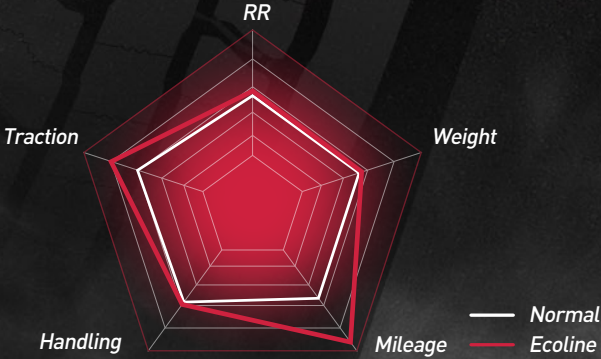

- 1 Closed shoulder promoted uniform wear and improved rolling resistance
- 2 Z-Zag groove provides good traction performance
- 3 3D sipe for longer mileage and traction performance
- 4 Exclusive velvet knurled font design for the high-end series, offering a more premium texture

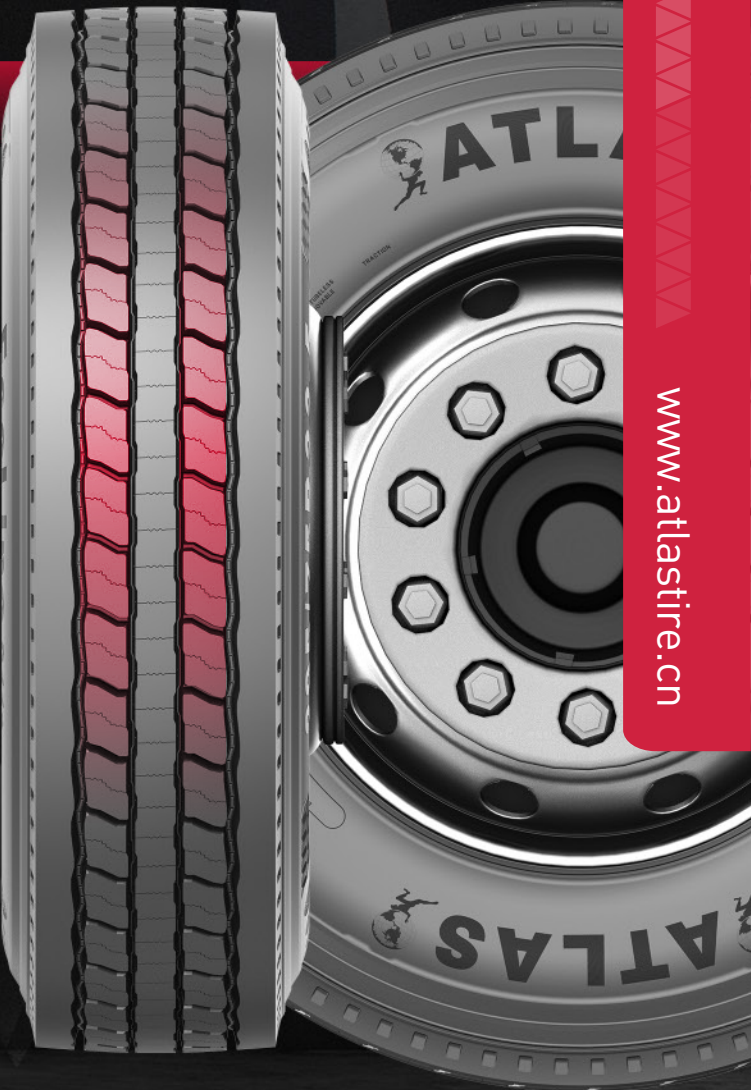

EcoLine S11


Size	Load index& Speed symbols	PR	Load Range	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				lbs	Dual psi	lbs	Single psi			
295/75R22.5	144/141L	14	G	5675	110	6175	110	39.92	11.73	18
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.92	11.73	18
295/75R22.5	149/146L	18	J	6610	123	7160	123	39.92	11.73	18



STEER

ORIGIN: THAILAND

TREAD DESIGN

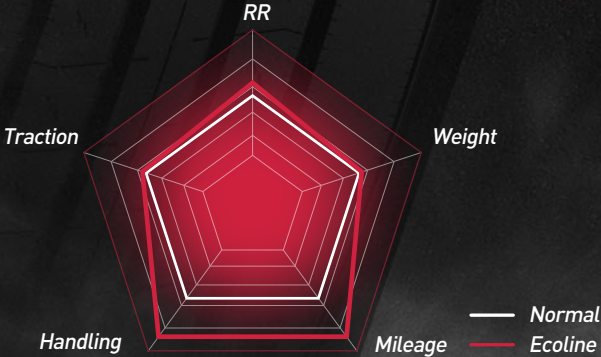

- 1 Open designed decoupling groove for enhanced even wear performance
- 2 Outer groove and shoulder sipes to extend tire life by protecting against cracking and tearing
- 3 Center rib diagonal sipes to promote even wear and grip
- 4 Exclusive velvet knurled font design for the high-end series, offering a more premium texture



EcoLine S11+


Size	Load index& Speed symbols	PR	Load Range	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				lbs	Dual psi	lbs	Single psi			
295/75R22.5	144/141L	14	G	5675	110	6175	110	39.92	11.73	18
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.92	11.73	18
295/75R22.5	149/146L	18	J	6610	123	7160	123	39.92	11.73	18



STEER

ORIGIN: THAILAND

TREAD DESIGN

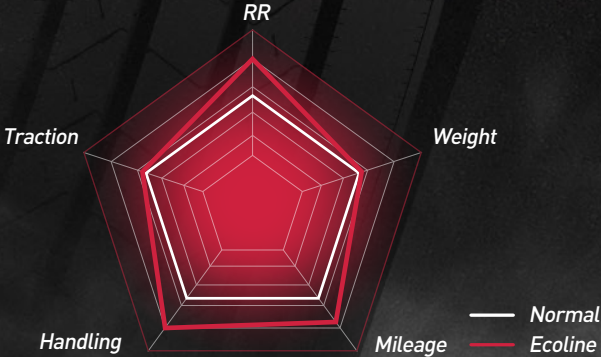

- 1 Open designed decoupling groove for enhanced even wear performance
- 2 Outer groove and shoulder sipes to extend tire life by protecting against cracking and tearing
- 3 Center rib diagonal sipes to promote even wear and grip
- 4 Exclusive velvet knurled font design for the high-end series, offering a more premium texture





AS01



- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	kg	Single kpa				
▲	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
▲	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
▲	315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO
▲	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.0	ETRTO
▲	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
▲	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
▲	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
▲	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	12.5	ETRTO
▲	315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	12.5	ETRTO
▲	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	13.0	ETRTO



AD01



- Low rolling resistance reduces fuel consumption.
- Lasting grip and stability by hidden groove design with M+S and 3PMSF marking.
- New pattern design improves mileage for long distance transportation.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	kg	Single kpa				
▲	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
▲	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
▲	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
▲	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
▲	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO
▲	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	16.5	ETRTO
▲	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
▲	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	16.0	ETRTO



AT13E



- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	kg	Single kpa				
▲	315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	12.5	ETRTO
▲	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	12.5	ETRTO
▲	315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	12.5	GB/TRA
▲	315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	12.5	GB/TRA
▲	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	12.5	ETRTO
▲	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	12.5	GB
▲	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	12.5	ETRTO
▲	295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	12.5	GB
▲	275/80R22.5	18	149/146	M	8.25	3000	850	3250	850	1012	276	12.5	ETRTO
▲	275/80R22.5	18	149/146	M	8.25	3000	900	3250	900	1012	276	12.5	GB
▲	275/80R22.5	16	147/144	M	8.25	2800	830	3075	830	1012	276	12.5	GB
▲	275/80R22.5	16	145/143	M	8.25	2725	750	2900	750	1012	276	12.5	ETRTO
▲	275/80R22.5	16	146/143	M	8.25	2725	830	3000	830	1012	276	12.5	TRA
▲	275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	12.5	ETRTO
▲	275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	12.5	ETRTO
▲	255/70R22.5	16	140/137	M	7.50	2300	800	2500	800	930	255	12.5	ETRTO
▲	255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	12.5	GB/TRA
▲	255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	12.5	ETRTO
▲	315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	15.0	ETRTO
▲	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	15.0	ETRTO
▲	315/60R22.5	20	153/150	K	9.75	3350	900	3650	900	950	313	15.0	GB
▲	315/60R22.5	18	151/148	K	9.75	3150	830	3450	830	950	313	15.0	GB
▲	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	15.5	ETRTO
▲	295/60R22.5	16	148/145	L	9.00	2900	830	3150	830	926	292	15.5	GB



STRD-09

- Good handling.
- Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



DRV-09

- Good braking and grip on wet road.
- Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA



STRD-09e+

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



DRV-09e+

- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	17.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	17.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA





STRD-09e+ II



- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure			Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg kpa				
★	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	9.5 TRA
★	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	9.5 TRA
★	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	9.5 TRA
★	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	9.5 TRA
★	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0 TRA
★	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0 TRA
★	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	9.5 TRA
★	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	9.5 TRA



TR-09



	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure			Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg kpa				
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.75 TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.75 TRA
	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75 TRA
	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75 TRA
	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.75 TRA
	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.75 TRA
	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	10.75 TRA
	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	10.75 TRA
	255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	10.75 TRA



TR-09e+



- Low fuel consumption.
- Certified by U.S.A SmartWay.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure			Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg kpa				
★	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10 TRA
★	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10 TRA
★	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75 TRA
★	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75 TRA
★	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10 TRA
★	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10 TRA



DRV-98



- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure			Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg kpa				
★	445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	20.0 TRA
★	445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	20.0 TRA
★	445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	20.0 ETRTO
★	445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	20.0 ETRTO





TRW-02



- Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	12.0	ETRTO
385/55R19.5	18	156	J	12.25	---	---	4000	900	919	386	12.5	ETRTO
435/50R19.5	18	156	J	14.00	---	---	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	---	---	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	---	---	4000	900	895	446	15.5	ETRTO
445/45R19.5	20	160	J	15.00	---	---	4500	900	895	446	15.5	ETRTO



TR-98



- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	10.5	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	10.5	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	10.5	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	10.5	ETRTO




DRV-29e+



- Closed shoulder design helps promote uniform wear throughout the life of the tire.
- Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.
- Optimized the footprint for long and even wear.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1066	279	23.8	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1066	279	23.8	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1117	279	23.8	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1117	279	23.8	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1067	283	23.8	TRA
285/75R24.5	16	147/144	L	8.25	2725	830	3000	830	1067	283	23.8	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1028	298	23.8	TRA
295/75R22.5	16	146/143L	L	9.00	2800	830	3075	830	1028	298	23.8	TRA

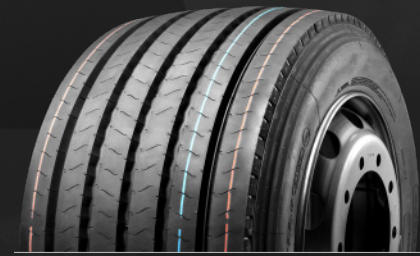

TRW-03



- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	15.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	15.5	ETRTO



LSH10



- The design with wider tread width combined with new patter style, the mileage can be increased by 20%-30%.
- Directional tread design much better to prevent irregular wear, and with good grip.
- Decoupling groove design control irregular wear; Stone rejectors protect the casing in base of the tread groove.
- Four belts construction; low rolling resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
295/75R22.5	14	144/141L	G	9.00	5675	110	6175	110	40.1	11.73	17.5	
295/75R22.5	16	146/143L	H	9.00	6005	120	6610	120	40.1	11.73	17.5	



LDH1



- The design with wider tread width combined with new patter style, the mileage can be increased by 20%-30%.
- Closed shoulder design helps promote uniform wear throughout the life of the tire.
- Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.
- Four belts construction; low rolling resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
295/75R22.5	14	144/141L	G	9.00	5675	110	6175	110	40.7	11.73	30	
295/75R22.5	16	146/143L	H	9.00	6005	120	6610	120	40.7	11.73	30	



LTH1



- The design with wider tread width combined with new patter style, the mileage can be increased by 20%-30%.
- Decoupling groove design control irregular wear.
- Micro sipes on groove edges provides enhanced traction in wet road conditions and resists abnormal or "river wear".
- Four belts construction; low rolling resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
295/75R22.5	14	144/141L	G	9.00	5675	110	6175	110	39.8	11.73	12.5	
295/75R22.5	16	146/143L	H	9.00	6005	120	6610	120	39.8	11.73	12.5	



REGIONAL

PAGE 31 ~ 48

DRV-OS x	33	D930	33	AS03	34
DRV-OS III	34	AD03	35	AT91	35
AS02	36	AD02	36	AP-100	37
AP-100e+	37	AP-09	38	APW-093	38
APW-092	38	AT12	39	AT177	39
DRV186	40	AP-100 XI	40	AP-200	41
KTT306	41	AP-100 I	42	AW-09	42
DRV-OS V	43	DRV-OS	43	AP-800	44
AP-100 II	44	AP-303	45	DRV-303	45
AT31	46	KTT307	46	KTT308	47
STR-29e+	47				





DRV-OS x



- Typical block pattern design makes good grip performance.
- High wear resistance and long life.
- Retreadability.
- Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	22.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	23.0	ETRTO
12R22.5	18	152/149	M	9.00	3250	930	3550	930	1085	300	23.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	19.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	19.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	19.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	23.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	23.0	ETRTO



D930



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
11.00R22	16	152/149	K	8.00	3250	830	3550	830	1135	293	20.0	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	20.0	GB
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	19.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	19.5	ETRTO



AS03



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- High wear resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.5	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	15.5	TRA
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	12.5	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	12.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	14.0	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	13.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO



DRV-OS III



- New technology for tire to reduce the weight.
- Low eccentric wear.
- Low fuel consumption.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure		Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm		
					Dual	Single						
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB



REGIONAL

www.atlastire.cn



AD03



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S and 3PMSF marking.
- High wear resistance.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
▲	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	20.5	GB
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
▲	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.5	ETRTO
▲	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	18.0	ETRTO



AT91



- Typical combined pattern design offers optimal trailer performance.
- Low rolling resistance.
- Wear-resistance compound reduces shifting to prevent uneven wear.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
▲	385/65R22.5	18	158	L	11.75	---	---	4250	850	1072	389	16.5	ETRTO
▲	385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO
▲	385/65R22.5	24	164	J	11.75	---	---	5000	900	1072	389	16.5	ETRTO
▲	385/65R22.5	24	164(158)	K(L)	11.75	---	---	5000	900	1072	389	16.5	ETRTO
▲	425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
▲	425/65R22.5	20	165	K	12.25	---	---	5150	825	1124	422	17.5	ETRTO
▲	445/65R22.5	20	169	J	13.00	---	---	5800	900	1150	444	18.0	ETRTO
▲	385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
▲	385/55R22.5	20	160(158)	J(L)	12.25	---	---	4500	900	996	386	16.5	ETRTO



AS02



- Long life.
- Retreadability.
- Low eccentric wear.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
▲	265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
▲	265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
▲	265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
▲	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	13.5	ETRTO
▲	285/70R19.5	20	150/148	J	8.25	3150	900	3350	900	895	283	13.5	ETRTO
▲	305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	12.0	TRA
▲	305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	12.0	TRA
▲	305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	12.0	ETRTO



AD02



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
▲	265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	15.5	ETRTO
▲	265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
▲	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
▲	305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	13.5	TRA
▲	305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	13.5	TRA
▲	305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	13.5	ETRTO



REGIONAL

www.atlastire.cn



AP-100



- Special design for all position axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	14.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	16.0	GB
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	16.0	GB
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



AP-100e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



AP-09



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
9R22.5	12	133/131	M	6.75	1950	720	2060	720	974	229	13.5	TRA
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	13.5	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	14.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1019	254	14.0	ETRTO
10R22.5	16	144/142	L	7.50	2650	900	2800	900	1019	254	14.0	GB



APW-093



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO



APW-092



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO



REGIONAL

www.atlastire.cn



AT12



- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tire and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



AT177



- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tire and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



DRV186



- Optimization of the shoulder and the proportion of pattern block in the middle.
- Classic mahjong block pattern style matching variable angle groove design and ensure a strong drive and self-cleaning.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO



AP-100 XI



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	14.5	ETRTO



REGIONAL

www.atlastire.cn



AP-200



- Long life.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	14.5	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	15.0	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	17.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.0	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	17.0	ETRTO



KTT306



- Low fuel consumption.
- HAT technology: low heat generation.
- Zigzag pattern design.
- New technology for tire to reduce the weight.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO



AP-100 I



- Good side-wear resistance.
- High-speed performance.
- Special design for all position of buses and steer or trailer axle of trucks.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11.00R22	16	152/149	K	8.0	3250	830	3550	830	1135	293	15.0	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	15.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	14.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	14.5	ETRTO



AW-09



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
265/70R19.5	16	139/136	M	7.50	2240	830	2430	830	867	262	13.5	GB
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	16	144/142	M	8.25	2650	800	2800	800	895	283	14.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	14.0	ETRTO
285/70R19.5	18	150/147	J	8.25	3075	900	3350	900	895	283	14.0	ETRTO
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	14.0	TRA
255/70R22.5	16	140/137	M	7.50	2300	800	2500	800	930	255	14.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	14.5	ETRTO



REGIONAL

www.atlastire.cn



DRV-OS V



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.5	GB
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	17.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	17.5	ETRTO



DRV-OS



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1110	279	20.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1110	279	20.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1020	298	20.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1020	298	20.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1056	283	20.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1056	283	20.5	TRA



AP-800



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.0	ETRTO
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	16.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	16.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	16.0	ETRTO



AP-100 II



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



REGIONAL

www.atlastire.cn



AP-303



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	15.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	15.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	14.0	GB
295/80R22.5	18	154/149	L	9.00	3750	850	3250	850	1044	298	14.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	12.5	ETRTO
385/65R22.5	20	160	K	11.75	—	—	4500	900	1072	389	16.0	ETRTO



DRV-303



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	14.5	ETRTO



AT31



- Good handling and driving.
- Long life.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	18.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	18.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	18.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	16.0	GB
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	18.0	ETRTO



KTT307



- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO
11R22.5	18	149/146	K	8.25	3000	930	3250	930	1050	279	14	GB
295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	14	ETRTO





KTT308



- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO



STR-29e+



- Wide shoulder ribs reduce shoulder step wear.
- Each size is manufactured with a specially tread depth to meet a greater range of application.
- Optimized the footprint for long and even wear.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1056	279	18.3	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1056	279	18.3	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1106	279	18.3	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1106	279	18.3	TRA
255/70R22.5	14	138/134	M	7.50	2120	760	2360	760	930	255	14.3	TRA
255/70R22.5	16	140/137	L	7.50	2300	830	2500	830	930	255	14.3	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1057	283	18.3	TRA
285/75R24.5	16	147/144	L	8.25	2725	830	3000	830	1057	283	18.3	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1017	298	18.3	TRA
295/75R22.5	16	146/143	L	9.00	2800	830	3075	830	1017	298	18.3	TRA



REGIONAL

www.atlastire.cn

LIGHT TRUCK

PAGE 49 ~ 58

AP-09	51	F835	51	AW-09	52
DRV-OS V	52	AP-303	53	DRV-303	53
AT80 PLUS	53	AP-100 X	54	AP-09 II	55
AT651	55	AP-09 IV	56	AP662	56
AP-100 VII	57	AP-100 IV	57		



AP-09



- Suitable for medium trucks running on the high-grade road.

1.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
	215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO

2.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
▲	245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.0	ETRTO
▲	235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
▲	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	13.0	ETRTO
▲	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO



F835



- Suitable for small trucks running on the high-grade road.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
	LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
	LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	248	11.1	TRA
	ST235/80R16	14	129/125	M	6 1/2J	1650	760	1850	760	780	235	8.9	TRA
	ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	800	235	8.9	TRA



AW-09



- Suitable for medium trucks running on the high-grade road.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
▲	8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
▲	205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	12.5	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO
	235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	13.0	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO
	225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
	225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
▲	245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
▲	245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
▲	245/70R19.5	16	135/133	M	7.50	2060	830	2180	830	839	248	13.0	TRA
▲	245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	13.0	ETRTO
▲	245/70R19.5	18	141/140	J	7.50	2500	850	2575	850	839	248	13.0	ETRTO



DRV-OS V



- Suitable for medium trucks running on the high-grade road.
- Good braking and grip on wet road.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	kpa				
	215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	15.0	ETRTO
▲	215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	15.0	ETRTO
▲	215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
▲	235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
▲	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
▲	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO



AP-303



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- HAT technology: low heat generation.



AP-100 X



- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	11.5	ETRTO
215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	12.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO



DRV-303



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
9.5R17.5	18	143/141	L	6.75	2575	875	2725	875	842	240	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO



AT80 PLUS



- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO
245/70R19.5	16	136/134	K	7.50	2120	825	2240	825	839	248	12.5	ETRTO
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	12.5	GB

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
6.00R13LT	8	93/89	L	4.50B	580	460	650	460	655	170	10.0	GB
6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.00R15LT	12	113/109	L	5.50F	1030	670	1150	670	750	200	12.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
205/65R17.5	16	129/127(132/132)	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA
225/90R17.5	14	127/125	L	6.75	1650	700	1750	700	851	226	13.0	JATMA
225/90R17.5	16	128/126	L	6.75	1700	700	1800	700	851	226	13.0	JATMA



AT651



- Thick sidewall design protects against sidewall impacts and bruises.
- Zig-zag grooves for excellent handling.
- HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	Single kpa				
7.00R16LT	12	115/110	M/N	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	M	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.0	GB



AP-09 II



- Suitable for small trucks running on the high-grade road.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	Single kg	Single kpa				
▲	8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
▲	8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
▲	7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
▲	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
	8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
▲	9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
▲	9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	12.0	ETRTO
	195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
	205/85R16LT	12	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



AP-09IV



- Wide and deep tread grooves for long tire life.
- Excellent cutting and chipping resistance.
- Robust tread and high traction on rough surfaces.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	Single kpa				
6.00R13LT	10	98/94	E	4.50B	670	560	750	560	655	170	12.5	GB
6.00R14LT	10	100/96	E	4 1/2J	710	560	800	560	680	170	12.5	GB
6.00R15LT	10	101/97	F	4.50E	730	560	825	560	705	170	12.5	GB
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	17.0	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	18.0	GB
9.00R16LT	16	134/129	D	6.50H	1850	770	2120	770	900	255	18.0	GB



AP662



- Thick sidewall design protect against sidewall impacts and bruises.
- Zig-zag grooves for excellent handling.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kg	Single kpa				
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	783	200	12.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	18	132/128	K	6.50H	1800	870	2000	870	865	235	13.5	GB



AP-100VIII



- Suitable for small trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



AP-100IV



- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	kpa	kg	kpa				
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	15.0	JATMA



ON&OFF ROAD

PAGE 59 ~ 70

AT-08CC	61	DRV-OS VIII	62	DRV-986	63
DRV-401	63	AT50	64	DRV-OS VI	64
DRV-OS IX	65	DRV-950	65	AP-09 I	66
APW-095	66	AP-403	67	DRV-403	67
AP-09 IV	68	AP-09 III	68	AP-09 V	68
DRV-M IV	69	DRV-M III	69	DRV-OS I	69



AT-08CC



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.



DRV-OSVIII



- Deep and rigid block design for long life and good traction.
- Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual kg	kpa	Single kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R20	20	156/153	J	8.5	3650	900	4000	900	1125	315	21.0	GB
12.00R20	22	158/155	J	8.5	3875	970	4250	970	1125	315	21.0	CAS
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	J	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16.0	ETRTO
9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16.0	ETRTO
265/70R19.5	16	140/138	K	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	K	7.50	2575	850	2725	850	867	262	15.5	ETRTO
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1050	298	22.0	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	22.0	GB
295/80R22.5	18	154/149	F	9.00	3250	850	3750	850	1050	298	22.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



DRV-986



- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	25.5	ETRTO
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	25.5	ETRTO
12.00R24	20	160/157	F	8.5	4125	900	4500	900	1226	315	25.5	GB
12.00R24	18	158/155	F	8.5	3875	830	4250	830	1226	315	25.5	GB
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1065	279	24.5	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1065	279	24.5	TRA
11R22.5	16	148/145	F	8.25	2900	850	3150	850	1065	279	24.5	ETRTO
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.5	ETRTO
12R22.5	18	152/149	F	9.00	3250	930	3550	930	1096	300	24.5	GB
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.5	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	24.5	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	24.5	TRA
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	24.5	GB
315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.5	ETRTO
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.5	ETRTO



DRV-401



- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.5	ETTRO
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	20.5	ETTRO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	20.5	GB



AT50



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	17.0	GB
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	17.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	19.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	19.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO
425/65R22.5	20	165	K	13.0	---	---	5150	825	1124	430	18.5	ETRTO
445/65R22.5	20	169	J/K	14.0	---	---	5800	900	1150	454	18.5	ETRTO



DRV-OSVI



- Good traction.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	19.0	GB
12.00R20	20	156/153	J	8.5	3650	900	4000	900	1125	315	19.0	GB
12.00R20	22	158/155	J	8.5	3875	970	4250	970	1125	315	19.0	GAS
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.5	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	20.5	GB



DRV-OSIX



- Suitable for medium trucks running on the normal road.
- Good braking and grip on wet road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	15.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	15.5	GB
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	14.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
245/70R19.5	16	135/133	M	7.50	2060	830	2180	830	839	248	15.5	TRA
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO



DRV-950



- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
11R24.5	14	146/143	F/G	8.25	2725	720	3000	720	1116	279	24.9	TRA
11R24.5	16	149/146	F/G	8.25	3000	830	3250	830	1116	279	24.9	TRA
295/75R22.5	16	146/143	J	9.00	2725	830	3000	830	1026	298	23.0	TRA
285/75R24.5	16	147/144	J	8.25	2800	830	3075	830	1062	283	23.0	TRA



AP-09 I



- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improve the wear mileage.
- Powerful traction, grip and climbing performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	kg	Single kpa				
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	19.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	19.0	ETRTO
325/95R24	22	162/160	K	9.0	4500	850	4750	850	1228	325	18.0	ETRTO



APW-095



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	Dual kpa	kg	Single kpa				
▲	385/55R22.5	18	158	L	12.25	—	—	4250	850	996	386	16.5	ETRTO
▲	385/55R22.5	20	160	J	12.25	—	—	4500	900	996	386	16.5	ETRTO
▲	385/65R22.5	18	158	K	11.75	—	—	4250	850	1072	389	16.5	ETRTO
▲	385/65R22.5	20	160	J/K	11.75	—	—	4500	900	1072	389	16.5	ETRTO
▲	385/65R22.5	24	164	J	11.75	—	—	5000	900	1072	389	16.5	ETRTO
	425/65R22.5	18	162	K	12.25	—	—	4750	760	1124	422	17.5	TRA
▲	425/65R22.5	20	165	J/K	12.25	—	—	5150	825	1124	422	17.5	ETRTO
	445/65R22.5	20	168	J/K	13.00	—	—	5600	830	1150	444	18.0	TRA
▲	445/65R22.5	20	169	J	13.00	—	—	5800	900	1150	444	18.0	ETRTO



AP-403



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
12.00R20	20	156/153	J	8.5	3650	900	4000	900	1125	315	15.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	14	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	15.5	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	15.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	15.5	ETRTO
13R22.5	20	156/153	K	9.75	3650	930	4000	930	1124	320	15.5	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	15.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
385/65R22.5	20	160	K	11.75	—	—	4500	900	1072	389	16.0	ETRTO
385/65R22.5	24	164	G	11.75	—	—	5000	900	1072	389	16.0	ETRTO



DRV-403



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	19.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	19.0	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	19.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.5	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.5	ETRTO
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO



AP-09IV



- Wide and deep tread grooves for long tire life.
- Excellent cutting and chipping resistance.
- Robust tread and high traction on rough surfaces.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	18.0	GB
9.00R20	16	144/142	D	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	19.0	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1125	315	19.0	GB
325/95R24	22	162/160	K	9.0	4500	850	4750	850	1228	325	23.0	ETRTO



AP-09III



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	17.5	ETRTO
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	17.5	GB
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.5	ETRTO



AP-09V



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO



DRV-MIV



- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.0	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.0	GB
295/80R22.5	18	154/149	F	9.00	3250	850	3750	850	1044	298	22.0	ETRTO



DRV-MIII



- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
275/80R22.5	16	149/146	J	8.25	3000	850	3250	850	1012	276	20.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



DRV-OS I



- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					kg	Dual kpa	Single kpa	kg				
9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1125	315	21.0	GB
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO
13R22.5	20	156/153	F	9.75	3650	930	4000	930	1124	320	20.0	GB



COACH&URBAN

PAGE 71 ~ 74

APU-02 73



APU-02



- Enhanced sidewall ensures high safety.
- Long service life.
- Typical used for urban bus.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						kg	kpa	kg	kpa				
▲	11R22.5	16	146/143	F	8.25	2725	830	3000	830	1054	279	20.0	TRA
▲	11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
▲	255/70R22.5	16	140/137	J	7.50	2300	800	2500	800	930	255	19.0	ETRTO
▲	275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
▲	305/70R22.5	16	152/148(154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
▲	295/80R22.5	16	152/148(154/150)	J(E)	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
▲	295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB

