




PCR TIRES CATALOGUE

PASSENGER CAR TIRE



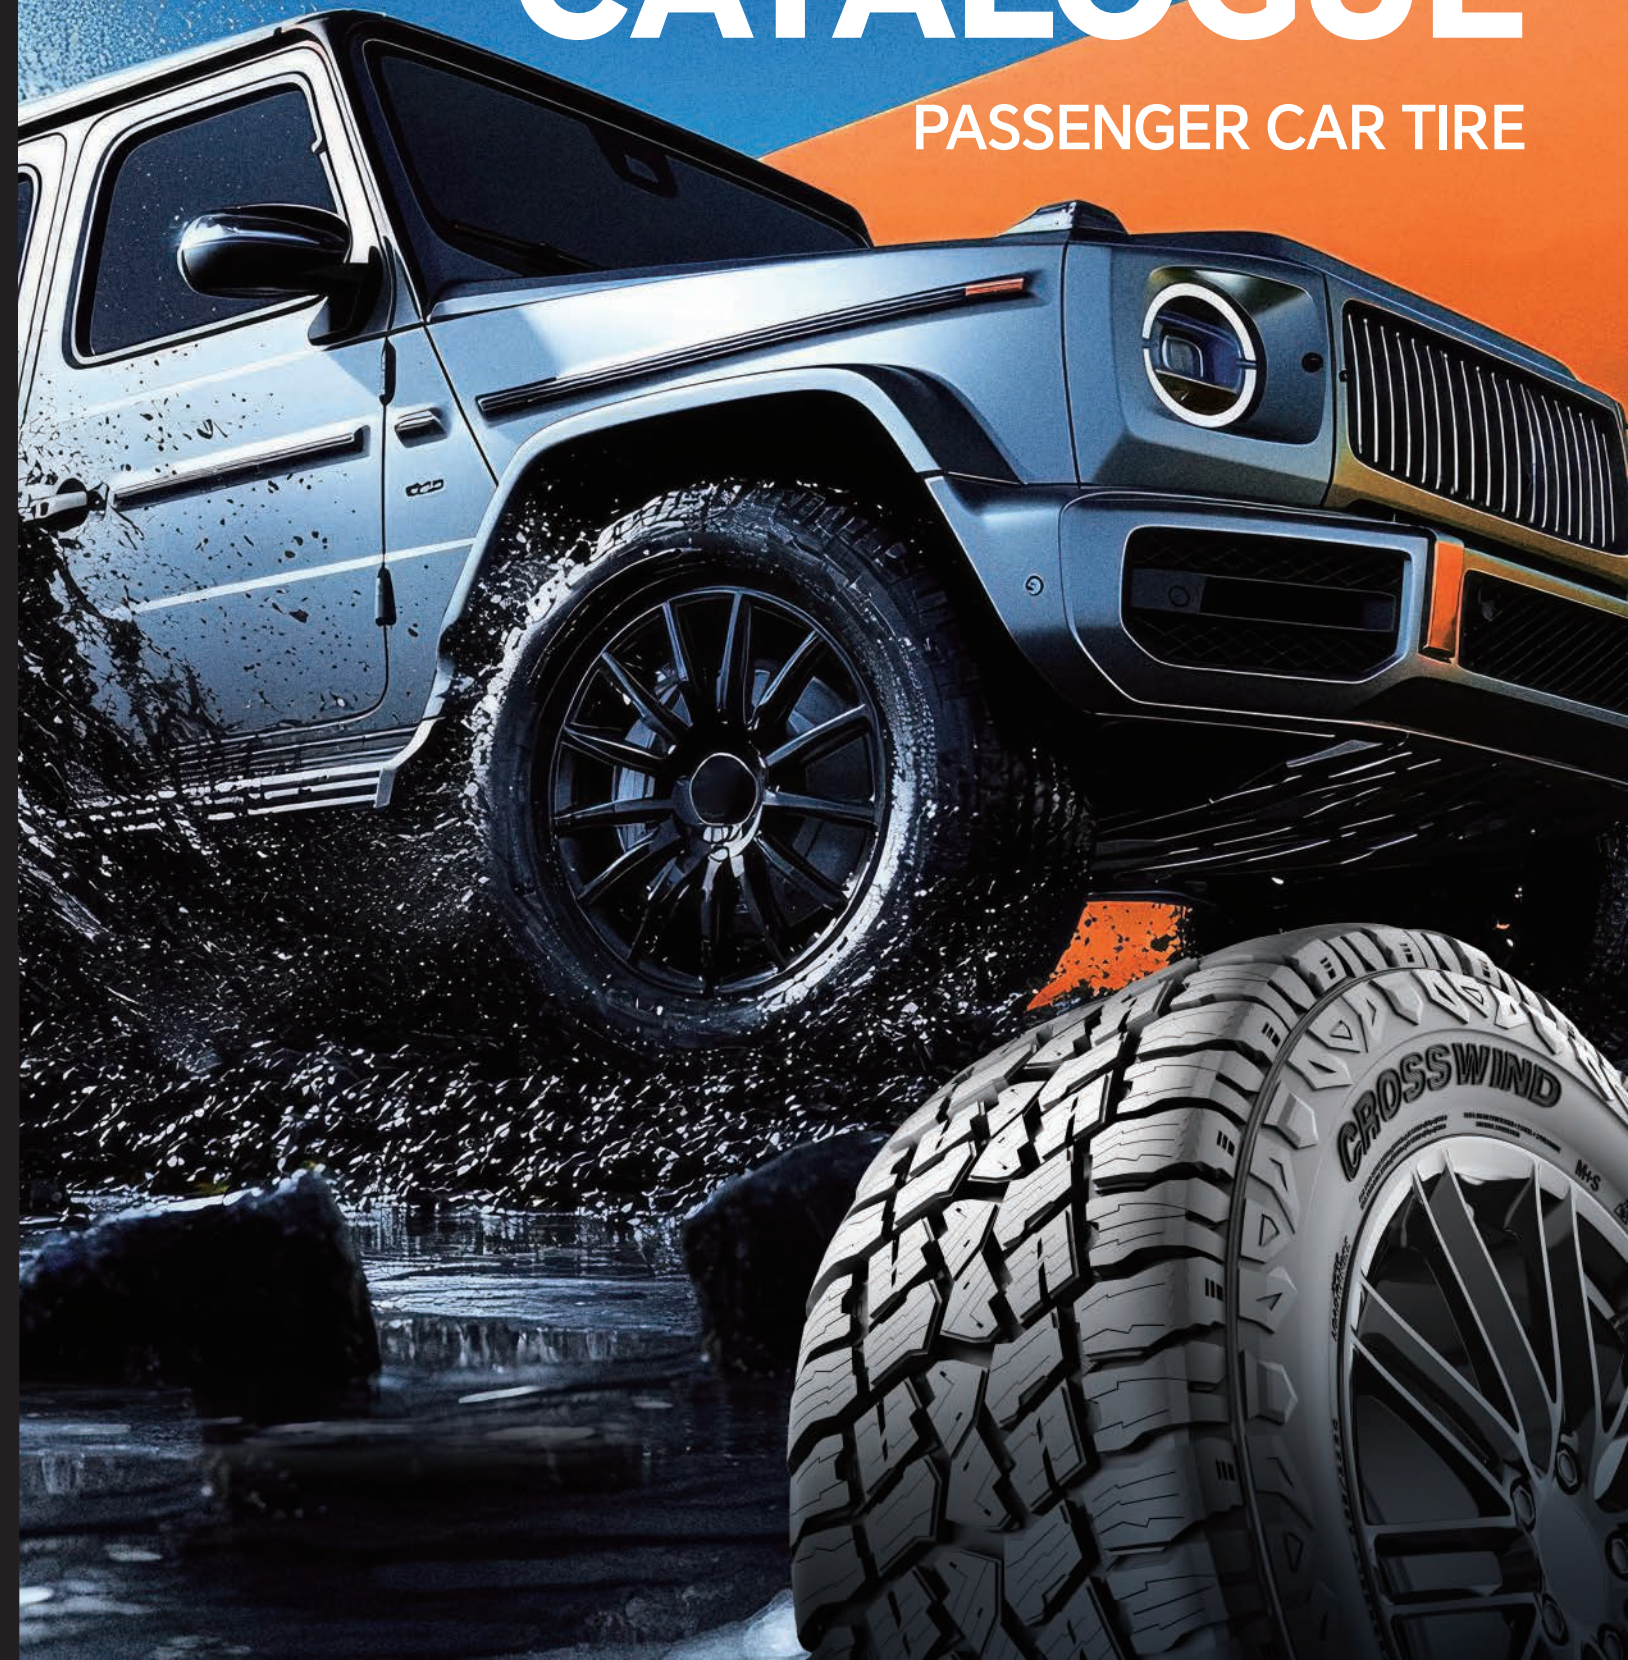

CROSSWIND CONTENT INDEX

Contents

SUMMER

03 COMFORT PEAK

09 SPORT PEAK

13 SPORT PEAK C/S

ALL SEASON

15 CrossWind HP010 PLUS

18 Ultra Sport+

19 CROSSWIND HT²

21 CrossWind TrailTraxx

23 Rugged Traxx

ALL WEATHER

25 GRIP PEAK 45

WINTER

28 GRIP PEAK WINTER

COMFORT PEAK

HIGH PERFORMANCE SUMMER



FEATURES & BENEFITS

- Enhanced safety, shorter braking distances.
- Excellent grip and traction on wet and dry roads.
- Comfortable, reduced noise emissions.
- Excellent longevity and high mileage.
- For compact cars and medium-sized vehicles.

COMFORT PEAK

RIM Size		Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Overall Width	Tread Depth			
					kg	lbs	kPa	psi	mm	in		mm	in	mm	32nds
13	155/80R13	79	T	4.50B	437	963	300	44	578	22.8	157	6.2	6.1	7.69	420/A/B
	175/70R13	82	T	5.00B	475	1047	300	44	576	22.7	177	7.0	6.1	7.69	420/A/B
	155/70R13	75	T	4.50B	387	853	300	44	548	21.6	157	6.2	6.9	8.69	420/A/B
	145/70R13	71	T	4.50B	345	761	300	44	534	21.0	150	5.9	6.1	7.69	420/A/B
14	205/70R14	94	T	6J	670	1477	300	44	644	25.4	209	8.2	6.6	8.31	420/A/B
	195/70R14	91	T	6J	615	1356	300	44	630	24.8	201	7.9	6.6	8.31	420/A/B
	185/70R14	88	T	5 1/2J	560	1235	300	44	616	24.3	189	7.4	6.1	7.69	420/A/B
	175/70R14	84	T	5J	500	1102	300	44	602	23.7	177	7.0	7.2	9.07	420/A/B
	165/70R14	81	T	5J	462	1019	300	44	588	23.1	170	6.7	8.2	10.33	420/A/B
	195/65R14	89	H	6J	580	1279	300	44	610	24.0	201	7.9	6.6	8.31	420/A/A
	175/65R14	82	H	5J	475	1047	300	44	584	23.0	177	7.0	8.2	10.33	420/A/A
	185/60R14	82	H	5 1/2J	475	1047	300	44	578	22.8	189	7.4	8.2	10.33	420/A/A
	185/65R14	86	H	5 1/2J	530	1168	300	44	596	23.5	189	7.4	6.1	7.69	420/A/A
	165/65R14	79	H	5J	437	963	300	44	570	22.4	170	6.7	6.1	7.69	420/A/A
	155/65R14	75	H	4 1/2 J	387	853	300	44	558	22.0	157	6.2	6.1	7.69	420/A/A
	195/60R14	86	H	6J	530	1168	300	44	590	23.2	201	7.9	6.6	8.31	420/A/A
	175/60R14	79	H	5J	437	963	300	44	566	22.3	177	7.0	6.1	7.69	420/A/A
	165/60R14	75	H	5J	387	853	300	44	554	21.8	170	6.7	6.9	8.69	420/A/A
185/55R14	80	H	6J	450	992	300	44	560	22.0	194	7.6	6.6	8.31	420/A/A	

RIM Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Overall Width		Tread Depth			
				kg	lbs	kPa	psi	mm	in	mm	in	mm	32nds		
15	205/70R15	96	T	6J	710	1565	300	44	669	26.3	209	8.2	6.6	8.31	420/A/B
	215/65R15	100	H	6 1/2J	800	1764	340	50	661	26.0	221	8.7	6.6	8.31	420/A/A
	205/65R15	94	H	6J	670	1477	300	44	647	25.5	209	8.2	6.6	8.31	420/A/A
	195/65R15	95	H	6J	690	1521	340	50	635	25.0	201	7.9	6.6	8.31	420/A/A
	185/65R15	92	T	5 1/2J	630	1389	340	50	621	24.4	189	7.4	6.9	8.69	420/A/A
	215/60R15	94	H	6 1/2J	670	1477	300	44	639	25.2	221	8.7	6.6	8.31	420/A/A
	205/60R15	91	V	6J	615	1356	300	44	627	24.7	209	8.2	6.6	8.31	420/A/A
	165/55R15	75	V	5J	387	853	300	44	563	22.2	170	6.7	6.1	7.69	420/A/A
	175/65R15	84	H	5 J	500	1102	300	44	609	24.0	177	7.0	6.1	7.69	420/A/A
	165/65R15	81	H	5J	462	1019	300	44	595	23.4	170	6.7	6.1	7.69	420/A/A
	145/65R15	72	T	4 1/2 J	355	783	300	44	569	22.4	150	5.9	7	8.82	420/A/A
	195/60R15	88	H	6J	560	1235	300	44	615	24.2	201	7.9	7.6	9.57	420/A/A
	185/60R15	88	H	5 1/2 J	560	1235	340	50	603	23.7	189	7.4	7.6	9.57	420/A/A
	175/60R15	81	H	5J	462	1019	300	44	591	23.3	177	7.0	6.1	7.69	420/A/A
	165/60R15	77	H	5J	412	908	300	44	579	22.8	170	6.7	6.1	7.69	420/A/A
	155/60R15	74	T	4 1/2J	375	827	300	44	567	22.3	157	6.2	6.1	7.69	420/A/A
	205/55R15	88	V	6 1/2J	560	1235	300	44	607	23.9	214	8.4	7.1	8.94	420/A/A
	195/55R15	85	V	6J	151	1135	300	44	595	23.4	201	7.9	6.9	8.69	420/A/A
	185/55R15	82	V	6J	475	1047	300	44	585	23.0	194	7.6	7.6	9.57	420/A/A
	175/55R15	77	T	5 1/2J	412	908	300	44	573	22.6	182	7.2	7.2	9.07	420/A/A
	205/50R15	86	V	6 1/2J	530	1168	300	44	587	23.1	214	8.4	6.6	8.31	420/A/A
	195/50R15	82	V	6J	475	1047	300	44	577	22.7	201	7.9	6.9	8.69	420/A/A
	165/55R15	75	V	5J	387	853	300	44	563	22.2	170	6.7	6.1	7.69	420/A/A

RIM Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Overall Width		Tread Depth			
				kg	lbs	kPa	psi	mm	in	mm	in	mm	32nds		
16	255/70R16	115	H	7 1/2J	1215	2679	340	50	764	30.1	260	10.2	7.9	9.95	420/A/B
	215/65R16	98	H	6 1/2J	750	1653	300	44	686	27.0	221	8.7	6.6	8.31	420/A/A
	205/65R16	95	H	6J	690	1521	300	44	672	26.5	209	8.2	6.6	8.31	420/A/A
	195/65R16	92	H	6J	630	1389	350	51	660	26.0	201	7.9	6.6	8.31	420/A/A
	235/60R16	100	H	7J	800	1764	300	44	688	27.1	240	9.4	7.4	9.32	420/A/A
	225/60R16	98	V	6 1/2J	750	1653	300	44	676	26.6	228	9.0	6.9	8.69	420/A/A
	215/60R16	99	V	6 1/2J	690	1521	300	44	664	26.1	221	8.7	6.6	8.31	420/A/A
	205/60R16	96	V	6J	710	1565	340	50	652	25.7	209	8.2	6.6	8.31	420/A/A
	195/60R16	89	H	6J	580	1279	300	44	640	25.2	201	7.9	6.6	8.31	420/A/A
	225/55R16	99	V	7J	775	1709	340	50	654	25.7	233	9.2	6.9	8.69	420/A/A
	215/55R16	93	V	7J	650	1433	300	44	642	25.3	226	8.9	6.6	8.31	420/A/A
	195/55R16	91	V	6J	615	1356	340	50	620	24.4	201	7.9	6.6	8.31	420/A/A
	185/55R16	83	V	6J	487	1074	300	44	610	24.0	194	7.6	7.1	8.94	420/A/A
	195/50R16	88	V	6J	560	1235	340	50	602	23.7	201	7.9	6.6	8.31	420/A/A
	185/50R16	81	V	6J	462	1019	300	44	592	23.3	194	7.6	6.6	8.31	420/A/A
	205/55R16	91	V	6 1/2J	615	1356	300	44	632	24.9	214	8.4	7.6	9.57	420/A/A
	225/70R16	103	H	6 1/2J	875	1929	300	44	722	28.4	228	9.0	8.4	10.58	420/A/B
	175/60R16	82	H	5J	475	1047	300	44	616	24.3	177	7.0	6.1	7.69	420/A/A
	225/50R16	92	V	7J	630	1389	300	44	632	24.9	233	9.2	6.9	8.69	420/A/A
	205/50R16	87	V	6 1/2J	545	1201	300	44	612	24.1	214	8.4	7.6	9.57	420/A/A
	195/55R16	91	V	6J	615	1356	340	50	620	24.4	201	7.9	6.6	8.31	420/A/A
	185/55R16	83	V	6J	487	1074	300	44	610	24.0	194	7.6	7.1	8.94	420/A/A
	195/50R16	88	V	6J	560	1235	340	50	602	23.7	201	7.9	6.6	8.31	420/A/A
	185/50R16	81	V	6J	462	1019	300	44	592	23.3	194	7.6	6.6	8.31	420/A/A

RIM Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Overall Width		Tread Depth		
				kg	lbs	kPa	psi	mm	in	mm	in	mm	32nds	
225/60R17	99	V	6 1/2J	775	1709	300	44	702	27.6	228	9.0	6.9	8.69	420/A/A
215/60R17	96	H	6 1/2J	710	1565	300	44	690	27.2	221	8.7	6.9	8.69	420/A/A
195/60R17	90	H	6J	600	1323	350	51	666	26.2	201	7.9	6.6	8.31	420/A/A
235/55R17	99	V	7 1/2J	775	1709	300	44	690	27.2	245	9.6	6.6	8.31	420/A/A
215/55R17	94	V	7J	670	1477	300	44	668	26.3	226	8.9	6.6	8.31	420/A/A
205/55R17	95	V	6 1/2J	690	1521	340	50	658	25.9	214	8.4	6.6	8.31	420/A/A
225/50R17	98	V	7J	750	1653	340	50	658	25.9	233	9.2	6.9	8.69	420/A/A
215/50R17	95	V	7J	690	1521	340	50	648	25.5	226	8.9	6.9	8.69	420/A/A
205/50R17	93	V	6 1/2J	650	1433	340	50	638	25.1	214	8.4	6.6	8.31	420/A/A
225/65R17	102	H	6 1/2J	850	1874	300	44	724	28.5	228	9.0	6.6	8.31	420/A/A
235/60R17	102	H	7J	850	1874	300	44	714	28.1	240	9.4	7.4	9.32	420/A/A
205/55R17	95	V	6 1/2J	690	1521	340	50	658	25.9	214	8.4	6.6	8.31	420/A/A
225/50R17	98	V	7J	750	1653	340	50	658	25.9	233	9.2	6.9	8.69	420/A/A
215/50R17	95	V	7J	690	1521	340	50	648	25.5	226	8.9	6.9	8.69	420/A/A
205/50R17	93	V	6 1/2J	650	1433	340	50	638	25.1	214	8.4	6.6	8.31	420/A/A

17



SPORT PEAK

ULTRA HIGH PERFORMANCE SUMMER



FEATURES & BENEFITS

- ▲ Outstanding handling, stability and control.
- ▲ Maximized grip and dry performance.
- ▲ Good levels of response for precise steering.
- ▲ Short braking distances on wet and dry roads.
- ▲ For compact cars, medium-sized vehicles, sedans and sport cars.

SPORT PEAK

RIM Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Overall	Width	Tread Depth			
				kg	lbs	kPa	psi	mm	in			mm	in	mm	32nds
16	185/55R16	87	V	6J	545	1201	340	50	610	24.0	194	7.6	6.4	8.06	A/A
	205/55R16	94	Y	6 1/2J	670	1477	340	50	632	24.9	214	8.4	7.1	8.94	A/A
	215/55R16	97	Y	7J	730	1609	340	50	642	25.3	226	8.9	6.4	8.06	A/A
	225/55R16	99	Y	7J	775	1709	340	50	654	25.7	233	9.2	6.4	8.06	A/A
	205/50R16	91	Y	6 1/2J	615	1356	340	50	612	24.1	214	8.4	6.4	8.06	A/A
	225/50R16	96	Y	7J	710	1565	340	50	632	24.9	233	9.2	6.4	8.06	A/A
	195/45R16	84	V	6 1/2J	500	1102	340	50	582	22.9	195	7.7	6.4	8.06	A/A
	205/45R16	87	Y	7J	545	1201	340	50	590	23.2	206	8.1	6.4	8.06	A/A
	215/45R16	90	Y	7J	600	1323	340	50	600	23.6	213	8.4	6.4	8.06	A/A
215/40R16	86	Y	7 1/2J	530	1168	340	50	578	22.8	218	8.6	6.4	8.06	A/A	
17	215/55R17	98	Y	7J	750	1653	340	50	668	26.3	226	8.9	6.4	8.06	A/A
	225/55R17	101	Y	7J	825	1819	340	50	680	26.8	233	9.2	6.4	8.06	A/A
	205/50R17	93	Y	6 1/2J	650	1433	340	50	638	25.1	214	8.4	6.4	8.06	A/A
	215/50R17	95	Y	7J	690	1521	340	50	648	25.5	226	8.9	6.4	8.06	A/A
	225/50R17	98	Y	7J	750	1653	340	50	658	25.9	233	9.2	7.1	8.94	A/A
	235/50R17	100	Y	7 1/2J	800	1764	340	50	668	26.3	245	9.6	6.9	8.69	A/A
	195/45R17	85	W	6 1/2J	515	1135	340	50	608	23.9	195	7.7	6.4	8.06	A/A
	205/45R17	88	Y	7J	560	1235	340	50	616	24.3	206	8.1	6.4	8.06	A/A
215/45R17	91	Y	7J	615	1356	340	50	626	24.6	213	8.4	6.4	8.06	A/A	

SPORT PEAK

RIM Size		Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Overall Width		Tread Depth		
					kg	lbs	kPa	psi	mm	in	mm	in	mm	32nds	
17	235/45R17	97	Y	8J	730	1609	340	50	644	25.4	236	9.3	6.9	8.69	A/A
	245/45R17	99	Y	8J	775	1709	340	50	652	25.7	243	9.6	6.9	8.69	A/A
	205/40R17	84	Y	7 1/2J	500	1102	340	50	596	23.5	212	8.3	6.4	8.06	A/A
	215/40R17	87	Y	7 1/2J	545	1201	340	50	604	23.8	218	8.6	6.4	8.06	A/A
	245/40R17	95	Y	8 1/2J	690	1521	340	50	628	24.7	248	9.8	6.9	8.69	A/A
18	235/50R18	101	Y	7 1/2J	825	1819	340	50	693	27.3	245	9.6	6.9	8.69	A/A
	225/45R18	95	Y	7 1/2J	690	1521	340	50	659	25.9	225	8.9	6.4	8.06	A/A
	235/45R18	98	Y	8J	750	1653	340	50	669	26.3	236	9.3	7.1	8.94	A/A
	245/45R18	100	Y	8J	800	1764	340	50	677	26.7	243	9.6	6.9	8.69	A/A
	255/45R18	103	Y	8 1/2J	875	1929	340	50	687	27.0	255	10.0	6.9	8.69	A/A
	225/40R18	92	Y	8J	630	1389	340	50	637	25.1	230	9.1	6.4	8.06	A/A
	235/40R18	95	Y	8 1/2J	690	1521	340	50	645	25.4	241	9.5	6.9	8.69	A/A
	245/40R18	97	Y	8 1/2J	730	1609	340	50	653	25.7	248	9.8	6.9	8.69	A/A
19	255/35R18	94	Y	9J	670	1477	340	50	635	25.0	260	10.2	6.9	8.69	A/A
	265/35R18	97	Y	9 1/2J	730	1609	340	50	643	25.3	271	10.7	6.9	8.69	A/A
	225/55R19	103	Y	7J	875	1929	340	50	731	28.8	233	9.2	6.4	8.06	A/A
	235/50R19	103	Y	7 1/2J	875	1929	340	50	719	28.3	245	9.6	6.9	8.69	A/A
	225/45R19	96	Y	7 1/2J	710	1565	340	50	685	27.0	225	8.9	6.4	8.06	A/A
	245/45R19	102	Y	8J	850	1874	340	50	703	27.7	243	9.6	6.9	8.69	A/A
	225/40R19	93	Y	8J	650	1433	340	50	663	26.1	230	9.1	6.4	8.06	A/A

SPORT PEAK

RIM Size		Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		Overall Diameter		Overall Width		Tread Depth		
					kg	lbs	kPa	psi	mm	in	mm	in	mm	32nds	
19	235/40R19	96	Y	8 1/2J	710	1565	340	50	671	26.4	241	9.5	6.9	8.69	A/A
	245/40R19	98	Y	8 1/2J	750	1653	340	50	679	26.7	248	9.8	6.9	8.69	A/A
	275/40R19	105	Y	9 1/2J	925	2039	340	50	703	27.7	278	10.9	6.9	8.69	A/A
	225/35R19	88	Y	8J	560	1235	340	50	641	25.2	230	9.1	7.1	8.94	A/A
	235/35R19	91	Y	8 1/2J	615	1356	340	50	647	25.5	241	9.5	6.9	8.69	A/A
	245/35R19	93	Y	8 1/2J	650	1433	340	50	655	25.8	248	9.8	7.1	8.94	A/A
	255/35R19	96	Y	9J	710	1565	340	50	661	26.0	260	10.2	6.9	8.69	A/A
	255/30R19	91	Y	9J	615	1365	340	50	637	25.1	260	10.2	6.9	8.69	A/A
20	245/40R20	99	Y	8 1/2J	775	1709	340	50	704	27.7	248	9.8	6.9	8.69	A/A
	245/35R20	95	Y	8 1/2J	690	1521	340	50	680	26.8	248	9.8	6.9	8.69	A/A
	255/35R20	97	Y	9J	730	1609	340	50	686	27.0	260	10.2	6.9	8.69	A/A
	275/35R20	102	Y	9 1/2J	850	1874	340	50	700	27.6	278	10.9	6.9	8.69	A/A
	315/35R20	110	Y	11J	1060	2337	340	50	728	28.7	320	12.6	6.9	8.69	A/A
	215/30R20	82	W	7 1/2J	475	1047	340	50	638	25.1	218	8.6	7.1	8.94	A/A
	265/30R20	94	Y	9 1/2J	670	1477	340	50	668	26.3	271	10.7	6.9	8.69	A/A
21	245/35R21	96	Y	8 1/2J	710	1565	340	50	705	27.8	248	9.8	6.9	8.69	A/A
	295/35R21	107	Y	10 1/2J	975	2149	340	50	739	29.1	301	11.9	6.9	8.69	A/A
22	255/35R22	99	Y	9J	775	1709	340	50	737	29.0	260	10.2	6.9	8.69	A/A
	285/35R22	106	Y	10J	950	2049	340	50	759	29.9	290	11.4	6.9	8.69	A/A
	265/30R22	97	Y	9 1/2J	730	1609	340	50	719	28.3	271	10.7	6.9	8.69	A/A



FEATURES & BENEFITS

- ▲ Enhanced safety, short braking distances.
- ▲ Precise handling, outstanding stability and control.
- ▲ Comfortable, reduces noise emissions.
- ▲ Enhanced wear performance, high mileage.
- ▲ For city SUV, SUV and modern off-road cars.

SPORT PEAK C/S

SUV (ULTRA) HIGH PERFORMANCE SUMMER



SPORT PEAK C/S

RIM	Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15	205/70R15	96	H	6J	710	1565	300	44
	215/70R16	100	H	6 1/2J	800	1764	300	44
	225/65R16	100	H	6 1/2J	800	1764	300	44
16	225/75R16	104	H	6J	900	1984	300	44
	235/60R16	100	H	7J	800	1764	300	44
	235/70R16	106	H	7J	950	2094	300	44
	245/70R16 XL	111	H	7J	1090	2403	340	50
	255/70R16	111	H	7 1/2J	1090	2403	300	44

RIM	Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16	265/70R16	112	T	8J	1120	2469	300	44
	275/70R16	114	H	8J	1180	2601	300	44
17	215/60R17	96	H	6 1/2J	710	1565	300	44
	215/65R17 XL	103	V	6 1/2J	875	1929	340	50
	225/65R17 XL	106	V	6 1/2J	950	2094	340	50
	235/60R17 XL	106	V	7J	950	2094	340	50
	235/65R17 XL	108	V	7J	1000	2205	340	50
	255/60R17	106	H	7 1/2J	950	2094	300	44
	255/65R17	110	H	7 1/2J	1060	2337	300	44
	265/65R17	112	H	8J	1120	2469	300	44
	275/55R17	109	V	8 1/2J	1030	2271	300	44
18	215/50R18	92	W	7J	630	1389	300	44
	215/55R18 XL	99	V	7J	775	1709	340	50
	225/50R18 XL	99	W	7J	775	1709	340	50
	225/55R18	98	V	7J	750	1653	300	44
	225/60R18 XL	104	V	6 1/2J	900	1984	340	50
	235/55R18 XL	104	W	7 1/2J	900	1984	340	50
	235/60R18 XL	107	W	7J	975	2149	340	50
	255/55R18 XL	109	Y	8J	1030	2271	340	50
	255/60R18 XL	112	V	7 1/2J	1120	2469	340	50
	265/60R18	110	V	8J	1060	2337	300	44
	275/60R18	113	H	8J	1150	2535	300	44
	285/60R18	116	H	8 1/2J	1250	2756	300	44
19	205/55R19 XL	97	V	6 1/2J	730	1609	340	50
	235/45R19 XL	99	V	8J	775	1709	340	50
	235/55R19 XL	105	W	7 1/2J	925	2039	340	50
	255/40R19 XL	100	W	9J	800	1764	340	50
	255/45R19 XL	104	W	8 1/2J	900	1984	340	50
	255/50R19 XL	107	W	8J	975	2149	340	50
	255/55R19 XL	111	W	8J	1090	2403	340	50
	265/50R19 XL	110	Y	8 1/2J	1060	2337	340	50
20	245/45R20 XL	103	W	8J	875	1929	340	50
	255/40R20 XL	101	W	9J	825	1819	340	50
	255/45R20 XL	105	Y	8 1/2J	925	2039	340	50
	265/45R20 XL	108	Y	9J	1000	2205	340	50
	265/50R20 XL	111	W	8 1/2J	1090	2403	340	50
21	275/45R20 XL	110	W	9J	1060	2337	340	50
	315/35R20 XL	110	Y	11J	1060	2337	340	50
	245/40R21 XL	100	W	8 1/2J	800	1764	340	50
	255/40R21 XL	102	W	9J	850	1874	340	50
	275/45R21 XL	110	W	9J	1060	2337	340	50



CROSSWIND HP010 PLUS

PCR tire with high grip performance



FEATURES & BENEFITS

- Adopt 3D steel sheet design to improve grip performance.
- Groove depth design with reasonable patterns increases tire wear mileage.
- The small vertical pattern design on the shoulder enhances drainage performance.

CROSSWIND HP010 PLUS

RIM	Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		UTQG
					kg	lbs	kPa	psi	
14	175/65R14	82	H	5J	475	1047	300	44	520/A/A
	185/65R14	86	H	5 1/2J	530	1168	300	44	520/A/A
	185/70R14	88	T	5 1/2J	560	1235	300	44	440/A/B
	195/70R14	91	T	6J	615	1356	300	44	440/A/B

RIM	Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		UTQG
					kg	lbs	kPa	psi	
15	185/60R15	84	H	5 1/2J	500	1102	300	44	520/A/A
	185/65R15	88	H	5 1/2J	560	1235	300	44	520/A/A
	195/60R15	88	H	6J	560	1235	300	44	520/A/A
	195/65R15	91	H	6J	615	1356	300	44	520/A/A
	205/60R15	91	H	6J	615	1356	300	44	520/A/A
	205/65R15	94	H	6J	670	1477	300	44	520/A/A
	215/70R15	98	T	6 1/2J	750	1653	300	44	440/A/B
16	195/55R16	87	H	6J	545	1201	300	44	520/A/A
	205/55R16	91	H	6 1/2J	615	1356	300	44	520/A/A
	205/60R16	92	H	6J	630	1389	300	44	520/A/A
	215/55R16	93	H	7J	650	1433	300	44	520/A/A
	215/60R16	95	V	6 1/2J	690	1521	300	44	520/A/A
	215/65R16	98	H	6 1/2J	750	1653	300	44	520/A/A
	215/70R16	100	T	6 1/2J	800	1764	300	44	440/A/B
	225/65R16	100	H	6 1/2J	800	1764	300	44	520/A/A
	225/60R16	98	H	6 1/2J	750	1653	300	44	520/A/A
	235/60R16	100	H	7J	800	1764	300	44	520/A/A
17	235/65R16	103	H	7J	875	1929	300	44	520/A/A
	215/45R17 XL	91	W	7J	615	1356	340	50	520/A/A
	215/50R17	91	V	7J	615	1356	300	44	520/A/A
	215/55R17	94	V	7J	670	1477	300	44	520/A/A
	215/60R17	96	H	6 1/2J	710	1565	300	44	520/A/A
	215/65R17	99	H	6 1/2J	775	1709	300	44	520/A/A
	225/45R17 XL	94	W	7 1/2J	670	1477	340	50	520/A/A
	225/50R17 XL	98	V	7J	750	1653	340	50	520/A/A
	225/55R17	97	V	7J	730	1609	300	44	520/A/A
	225/60R17	99	H	6 1/2J	775	1709	300	44	520/A/A
	225/65R17	102	H	6 1/2J	850	1874	300	44	520/A/A
	235/45R17 XL	97	V	8J	730	1609	340	50	520/A/A
	235/55R17	99	V	7 1/2J	775	1709	300	44	520/A/A
	235/60R17	102	H	7J	850	1874	300	44	520/A/A
	235/65R17	104	H	7J	900	1984	300	44	520/A/A

RIM	Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure		UTQG
					kg	lbs	kPa	psi	
18	215/55R18 XL	99	H	7J	775	1709	340	50	520/A/A
	225/40R18 XL	92	W	8J	630	1389	340	50	520/A/A
	225/45R18 XL	95	W	7 1/2J	690	1521	340	50	520/A/A
	225/50R18	95	W	7J	690	1521	300	44	520/A/A
	225/55R18	98	H	7J	750	1653	300	44	520/A/A
	225/60R18	100	H	6 1/2J	800	1764	300	44	520/A/A
	235/50R18	97	W	7 1/2J	730	1609	300	44	520/A/A
	235/55R18 XL	104	V	7 1/2J	900	1984	340	50	520/A/A
	235/60R18	103	H	7J	875	1929	300	44	520/A/A
	235/65R18	106	H	7J	950	2094	300	44	520/A/A
	245/40R18 XL	97	W	8 1/2J	730	1609	340	50	520/A/A
	245/45R18 XL	100	W	8J	800	1764	340	50	520/A/A
19	245/60R18	105	H	7J	925	2039	300	44	520/A/A
	255/65R18	111	H	7 1/2J	1090	2403	300	44	520/A/A
	225/55R19	99	V	7J	775	1709	300	44	520/A/A
	225/45R19 XL	96	W	7 1/2J	710	1565	340	50	520/A/A
	235/40R19 XL	96	V	8 1/2J	710	1565	340	50	520/A/A
	235/55R19 XL	105	V	7 1/2J	925	2039	340	50	520/A/A
	245/45R19 XL	102	V	8J	850	1874	340	50	520/A/A
	255/45R19 XL	104	V	8 1/2J	900	1984	340	50	520/A/A
	255/60R19	109	H	7 1/2J	1030	2271	300	44	520/A/A

CROSSWIND

EXCELLENT HANDLING CONTROL
EXCELLENT SAFETY ON DRY AND WET ROADS

ULTRA SPORT+

Excellent handling control
Excellent safety on dry and wet roads

FEATURES & BENEFITS

- ▲ New generation of asymmetric ultra high performance tyre for summer. Make the tires have superior grip and braking performance and better handing.
- ▲ BPT Technology--improve the acture contact area for better the handling performance.
- ▲ 3D sipes improves the stiffness of block. enabling better wet performance and snow performance.

ULTRA SPORT+

RIM	Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
20	275/40R20	106	W	9 1/2J	950	2094	340	50

CROSSWIND HT²

All-season Performance Long&Regular Wear



FEATURES & BENEFITS

- ▲ High performance all-season highway tire designed for North American luxury SUV.
- ▲ Excellent dry and wet handling performance maintains quiet highway driving.
- ▲ Multiple variable pitches design combined with optimized pitch ratio and arrangement reduce noise and enhance handling performance.



RIM	Size	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15	235/75R15	105	T	6 1/2J	925	2039	300	44
	215/70R16	100	H	6 1/2J	800	1764	300	44
16	225/70R16	103	T	6 1/2J	875	1929	300	44
	235/70R16	106	T	7J	950	2094	300	44
	245/70R16	107	T	7J	975	2149	300	44
	255/70R16	111	T	7 1/2J	1090	2403	300	44
	265/70R16	112	T	8J	1120	2469	300	44
	265/75R16	116	T	7 1/2J	1250	2756	300	44
	245/75R16	111	T	7J	1090	2403	300	44
17	215/65R17	99	T	6 1/2J	775	1709	300	44
	225/60R17	99	H	6 1/2J	775	1709	300	44
	235/60R17 XL	106	H	7J	950	2094	340	50
	235/65R17	104	T	7J	900	1984	300	44
	235/70R17	107	T	7J	975	2149	300	44
	245/65R17	107	T	7J	975	2149	300	44
	245/70R17	110	T	7J	1060	2337	300	44
	255/65R17	110	T	7 1/2J	1060	2337	300	44
18	265/65R17	112	T	8J	1120	2469	300	44
	225/55R18	98	H	7J	750	1653	300	44
	235/55R18 XL	104	H	7 1/2J	900	1984	340	50
	235/60R18 XL	107	H	7J	975	2149	340	50
	235/65R18	106	H	7J	950	2094	300	44
	245/60R18	105	H	7J	925	2039	300	44
	255/55R18	105	H	8J	925	2039	300	44
	255/65R18	111	T	7 1/2J	1090	2403	300	44
	255/70R18	113	T	7 1/2J	1150	2535	300	44
	265/65R18	114	T	8J	1180	2601	300	44
19	265/70R18	116	T	8J	1250	2756	300	44
	275/65R18	116	T	8J	1250	2756	300	44
	235/55R19	101	H	7 1/2J	825	1819	300	44
	245/55R19	103	H	7 1/2J	875	1929	300	44
	255/50R19 XL	107	H	8J	975	2149	340	50
20	255/60R19	109	H	7 1/2J	1030	2271	300	44
	235/55R20	102	H	7 1/2J	850	1874	300	44
	245/60R20	107	H	7J	975	2149	300	44
	245/50R20	102	H	7 1/2J	850	1874	300	44
	255/50R20 XL	109	H	8J	1030	2271	340	50
	255/60R20 XL	113	T	8J	1150	2535	340	50
	265/50R20	107	H	8 1/2J	975	2149	300	44
	275/55R20	113	H	8 1/2J	1150	2535	300	44
22	275/60R20	115	T	8J	1215	2679	300	44
	285/45R22	110	H	9 1/2J	1060	2337	300	44

CROSSWIND TRAILTRAXX

All weather applicability/All terrain durability



FEATURES & BENEFITS

- ▲ Security assurance with any adventure, any terrain and in any weather.
- ▲ Driving with low noise, high traction and robustness off-road, also handling snow road easily.
- ▲ Outstanding mileage for heavy pickup and 4X4 vehicles.

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	LT225/75R16	E	115/112	Q	6J	1215/1120	2680/2470	550	80
	LT265/75R16	E	123/120	Q	7 1/2J	1550/1400	3415/3085	550	80
	LT245/75R16	E	120/116	Q	7J	1380/1260	3042/2778	550	80
	265/75R16	-	116	S	7 1/2J	1250	2756	300	44
	235/70R16	-	106	S	7J	950	2094	300	44
	LT285/75R16	E	126/123	Q	8J	1700/1550	3750/3415	550	80
	265/70R16	-	112	S	8J	1120	2469	300	44
	245/75R16	-	111	S	7J	1090	2403	300	44
17	285/70R17	-	116	T	8 1/2J	1250	2756	300	44
	LT265/70R17	E	123/120	Q	8J	1550/1400	3415/3085	550	80
	LT245/75R17	E	121/118	Q	7J	1450/1320	3195/2910	550	80
	265/70R17	-	115	S	8J	1215	2679	300	44
	LT285/70R17	E	126/123	Q	8 1/2J	1700/1550	3750/3415	550	80
	LT315/70R17	E	126/123	Q	9 1/2J	1700/1550	3750/3415	450	65
	245/65R17	-	111	H	7J	1090	2403	340	50
	35X12.50R17LT	E	125	Q	10J	1650	3640	450	65
18	265/65R17	-	116	S	8J	1250	2756	340	50
	255/70R18	-	113	T	7 1/2J	1150	2535	300	44
	LT295/70R18	E	129/126	Q	8 1/2J	1850/1700	4080/3750	550	80
	275/65R18	-	116	T	8J	1250	2756	300	44
	265/70R18	-	116	T	8J	1250	2756	300	44
	LT275/70R18	E	125/122	Q	8J	1650/1500	3640/3305	550	80
	LT275/65R18	E	123/120	Q	8J	1550/1400	3415/3085	550	80
	265/60R18	-	110	T	8J	1060	2337	300	44
20	35X12.50R18LT	F	128	Q	10J	1800	3970	550	80
	35X12.50R20LT	F	125	Q	10J	1650	3640	550	80
	275/60R20	-	115	T	8J	1215	2679	300	44
	LT275/65R20	E	126/123	Q	8J	1700/1550	3750/3415	550	80
	LT285/55R20	E	122/119	Q	9J	1500/1360	3305/3000	550	80
	275/55R20	-	117	S	8 1/2J	1285	2833	340	50
	LT285/60R20	E	125/122	Q	8 1/2J	1650/1500	3640/3305	550	80
	33X12.50R20LT	F	119	Q	10J	1360	3000	550	80
22	285/45R22	-	110	Q	9 1/2J	1060	2337	300	44
	35X12.50R22LT	F	121	Q	10J	1450	3195	550	80

RUGGED TRAXX

High off-road traction performance/High durability



FEATURES & BENEFITS

- ▲ High floatation: High load-carrying capacity.
- ▲ Aggressive tread pattern and sidewall design.
- ▲ The Magic Rock blocks deal with all kinds of harsh terrain and climate.
- ▲ The open shoulder grooves and large trench volume improve the drainage of mud and snow under bad road conditions.

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	265/70R16	-	112	Q	8J	1120	2469	300	44
	265/75R16	-	116	Q	7 1/2J	1250	2756	300	44
	LT245/75R16	E	120/116	Q	7J	1380/1260	3042/2778	550	80
	LT285/75R16	E	126/123	Q	8J	1700/1550	3750/3415	550	80
	LT265/75R16	E	123/120	Q	7 1/2J	1550/1400	3415/3085	550	80
17	35X12.50R17LT	F	128	Q	10J	1800	3970	550	80
	265/70R17	-	115	Q	8J	1215	2679	300	44
	265/65R17	-	112	Q	8J	1120	2469	300	44
	LT245/75R17	E	121/118	Q	7J	1450/1320	3195/2910	550	80
	LT285/70R17	E	126/123	Q	8 1/2J	1700/1550	3750/3415	550	80
	LT265/70R17	E	123/120	Q	8J	1550/1400	3415/3085	550	80
18	35X12.50R18LT	F	128	Q	10J	1800	3970	550	80
	255/70R18	-	116	T	7 1/2J	1250	2756	340	50
	275/65R18	-	116	T	8J	1250	2756	340	50
	265/60R18	-	114	Q	8J	1180	2601	340	50
	265/70R18	-	116	S	8J	1250	2756	300	44
	LT275/70R18	E	125/122	Q	8J	1650/1500	3640/3305	550	80
	LT275/65R18	E	123/120	Q	8J	1550/1400	3415/3085	550	80
20	35X12.50R20LT	F	125	Q	10J	1650	3640	550	80
	275/55R20	-	117	Q	8 1/2J	1285	2833	340	50
	275/60R20	-	116	T	8J	1250	2756	340	50
	LT305/55R20	E	121/118	Q	9 1/2J	1450/1320	3195/2910	450	65
	LT275/65R20	E	126/123	Q	8J	1700/1550	3750/3415	550	80
	LT285/60R20	E	125/122	Q	8 1/2J	1650/1500	3640/3305	550	80
22	35X12.50R22LT	F	121	Q	10J	1450	3195	550	80
	37X13.50R22LT	F	128	Q	11J	1800	3970	550	80
	285/45R22	-	114	Q	9 1/2J	1180	2601	340	50
24	35X12.50R24LT	F	116	Q	10 1/2J	1250	2755	550	80

GRIP PEAK 45

ALL SEASON



- ▲ Good traction on dry, wet and snowy roads.
- ▲ Short braking distances rain or shine.

- ▲ Excellent longevity and high mileage.
- ▲ M+S marked and 3PMSF symbol.

- ▲ For compact cars, medium-sized vehicles and SUV.

INCH	EAN	SIZE	LI	SI	XL				EPREL CODE
13	-	155/70R13	75	T	/	D	C	68 A	-
	-	155/80R13	79	T	/	D	C	68 A	-
	-	165/70R13	79	T	/	D	C	68 A	-
14	-	155/65R14	75	T	/	D	C	68 A	-
	-	165/60R14	75	H	/	D	C	68 A	-
	-	165/65R14	79	T	/	D	C	68 A	-
	-	165/70R14	81	T	/	D	C	68 A	-
	-	175/65R14	82	T	/	D	C	68 A	-
	-	175/70R14	88	T	XL	D	C	68 A	-
	-	185/60R14	82	H	/	D	B	68 A	-
	-	185/65R14	86	H	/	D	B	68 A	-
15	-	165/65R15	81	T	/	D	C	68 A	-
	-	175/65R15	88	T	XL	D	C	68 A	-
	-	185/55R15	82	H	/	D	B	68 A	-
	-	185/60R15	88	H	XL	D	B	68 A	-
	-	185/65R15	88	H	/	D	B	68 A	-
	-	195/50R15	86	H	XL	D	B	69 A	-
	-	195/55R15	85	H	/	D	B	69 A	-
	-	195/60R15	88	H	/	D	B	69 A	-
	-	195/65R15	91	H	/	D	B	69 A	-
16	-	205/65R15	94	H	/	C	B	69 A	-
	-	195/45R16	84	V	XL	D	B	69 A	-
	-	195/55R16	87	V	/	D	B	69 A	-
	-	205/55R16	91	V	/	D	B	69 A	-
	-	205/60R16	96	V	XL	C	B	69 A	-
	-	215/55R16	97	V	XL	C	B	69 A	-
	-	215/60R16	99	V	XL	C	B	69 A	-
	-	215/65R16	102	V	XL	C	B	69 A	-

INCH	EAN	SIZE	LI	SI	XL				EPREL CODE
16	-	215/70R16	100	H	/	C	B	69 A	-
	-	245/70R16	107	H	/	C	B	72 B	-
17	-	205/45R17	88	W	XL	D	B	69 A	-
	-	205/50R17	93	V	XL	C	B	69 A	-
	-	205/55R17	95	W	XL	C	B	69 A	-
	-	215/40R17	87	V	XL	D	B	69 A	-
	-	215/45R17	91	W	XL	D	B	69 A	-
	-	215/50R17	95	W	XL	C	B	69 A	-
	-	215/55R17	98	V	XL	C	B	69 A	-
	-	215/60R17	100	V	XL	C	B	69 A	-
	-	225/45R17	94	W	XL	C	B	69 A	-
	-	225/50R17	98	V	XL	C	B	69 A	-
	-	225/55R17	101	V	XL	C	B	69 A	-
	-	225/60R17	103	V	XL	C	B	69 A	-
	-	225/65R17	106	V	XL	C	B	69 A	-
	-	235/45R17	97	W	XL	C	B	72 B	-
	-	235/55R17	103	W	XL	C	B	72 B	-
	-	235/65R17	108	V	XL	C	B	72 B	-
18	-	245/45R17	99	W	XL	C	B	72 B	-
	-	215/40R18	89	W	XL	D	B	69 A	-
	-	215/50R18	96	W	XL	C	B	69 A	-
	-	215/55R18	99	W	XL	C	B	69 A	-
	-	225/40R18	92	W	XL	C	B	69 A	-
	-	225/45R18	95	W	XL	C	B	69 A	-
	-	235/45R18	98	W	XL	C	B	72 B	-
	-	235/55R18	100	W	/	C	B	72 B	-
19	-	245/40R18	97	W	XL	C	B	72 B	-
	-	225/35R19	88	W	XL	D	B	69 A	-
	-	225/45R19	96	W	XL	C	B	69 A	-
	-	235/35R19	91	W	XL	D	B	72 B	-
	-	245/45R19	102	W	XL	C	B	72 B	-



GRIP PEAK WINTER

(ULTRA) HIGH PERFORMANCE WINTER



FEATURES & BENEFITS

- ▲ Outstanding traction and braking performance in snow and ice.
- ▲ Enhanced performance for a safe driving experience in winter.
- ▲ High mileage.
- ▲ M+S marked and 3PMSF symbol.
- ▲ For compact cars, medium-sized vehicles and SUV.



GRIP PEAK WINTER

INCH	EAN	SIZE	LI	SI	XL				EPREL CODE
14	-	165/70R14	85	T	XL	D	B	71 B	-
	-	175/65R14	82	T		D	B	71 B	-
	-	175/65R14	86	H	XL	D	B	71 B	-

INCH	EAN	SIZE	LI	SI	XL				EPREL CODE
15	-	175/65R15	88	H	XL	D	B	71 B	-
	-	185/55R15	86	V	XL	D	B	71 B	-
	-	185/60R15	88	V	XL	D	B	71 B	-
	-	185/65R15	88	T		D	B	71 B	-
	-	185/65R15	92	V	XL	D	B	71 B	-
	-	195/50R15	86	V	XL	D	B	72 B	-
	-	195/60R15	92	H	XL	D	B	72 B	-
	-	195/65R15	91	T		D	B	72 B	-
	-	195/65R15	95	V	XL	D	B	72 B	-
16	-	195/45R16	84	H	XL	D	B	72 B	-
	-	195/50R16	88	H	XL	D	B	72 B	-
	-	195/55R16	87	H		D	B	72 B	-
	-	205/45R16	87	H	XL	D	A	72 B	-
	-	205/55R16	91	H		D	A	72 B	-
	-	205/55R16	94	V	XL	D	A	72 B	-
	-	205/60R16	92	H		D	A	72 B	-
	-	205/60R16	96	V	XL	D	A	72 B	-
	-	205/65R16	95	H		D	A	72 B	-
	-	215/45R16	90	V	XL	D	A	72 B	-
	-	215/55R16	97	V	XL	D	A	72 B	-
	-	215/60R16	99	V	XL	D	A	72 B	-
	-	215/65R16	102	H	XL	D	A	72 B	-
	-	215/70R16	104	H	XL	D	A	72 B	-
	-	225/75R16	108	H	XL	C	A	72 B	-
17	-	205/45R17	88	V	XL	D	A	72 B	-
	-	205/50R17	93	V	XL	D	A	72 B	-
	-	205/55R17	95	V	XL	D	A	72 B	-
	-	205/60R17	93	H		D	A	72 B	-
	-	215/45R17	91	V	XL	D	A	72 B	-
	-	215/50R17	95	V	XL	D	A	72 B	-
	-	215/55R17	98	V		D	A	72 B	-

INCH	EAN	SIZE	LI	SI	XL				EPREL CODE
17	-	215/60R17	100	H	XL	D	A	72 B	-
	-	215/65R17	103	V	XL	D	A	72 B	-
	-	225/45R17	94	W	XL	D	A	72 B	-
	-	225/50R17	98	V	XL	D	A	72 B	-
	-	225/55R17	101	V	XL	D	A	72 B	-
	-	225/60R17	103	V	XL	D	A	72 B	-
	-	225/65R17	106	V	XL	C	A	72 B	-
	-	235/45R17	97	H	XL	D	A	72 B	-
	-	235/55R17	103	V	XL	D	A	72 B	-
	-	235/65R17	108	H	XL	C	A	72 B	-
	-	245/45R17	99	V	XL	D	A	72 B	-
	-	245/65R17	11	V	XL	C	A	72 B	-
	-	265/65R17	11	H	XL	C	A	73 B	-
18	-	195/60R18	96	H	XL	D	B	72 B	-
	-	215/55R18	99	V	XL	D	A	72 B	-
	-	225/40R18	92	W	XL	D	A	72 B	-
	-	225/45R18	95	W	XL	D	A	72 B	-
	-	225/50R18	99	V	XL	D	A	72 B	-
	-	225/55R18	102	V	XL	D	A	72 B	-
	-	235/45R18	98	V	XL	D	A	72 B	-
	-	235/55R18	104	V	XL	D	A	72 B	-
	-	235/60R18	107	H	XL	C	A	72 B	-
	-	245/40R18	97	V	XL	D	A	72 B	-
	-	245/45R18	100	W	XL	D	A	72 B	-
	-	235/55R19	105	V	XL	D	A	72 B	-
19	-	245/40R19	98	V	XL	D	A	72 B	-
	-	245/45R19	102	V	XL	D	A	72 B	-
	-	255/35R19	96	V	XL	D	A	73 B	-
	-	255/40R19	100	V	XL	D	A	73 B	-
	-	255/45R19	104	H	XL	D	A	73 B	-

INCH	EAN	SIZE	LI	SI	XL				EPREL CODE	
19	-	255/50R19	107	V	XL	C	A	73	B	-
	-	275/40R19	105	V	XL	D	A	73	B	-
20	-	245/45R20	103	H	XL	D	A	72	B	-
	-	255/35R20	97	V	XL	D	A	73	B	-
	-	275/40R20	106	V	XL	C	A	73	B	-
	-	315/35R20	110	V	XL	C	A	75	B	-

Date