


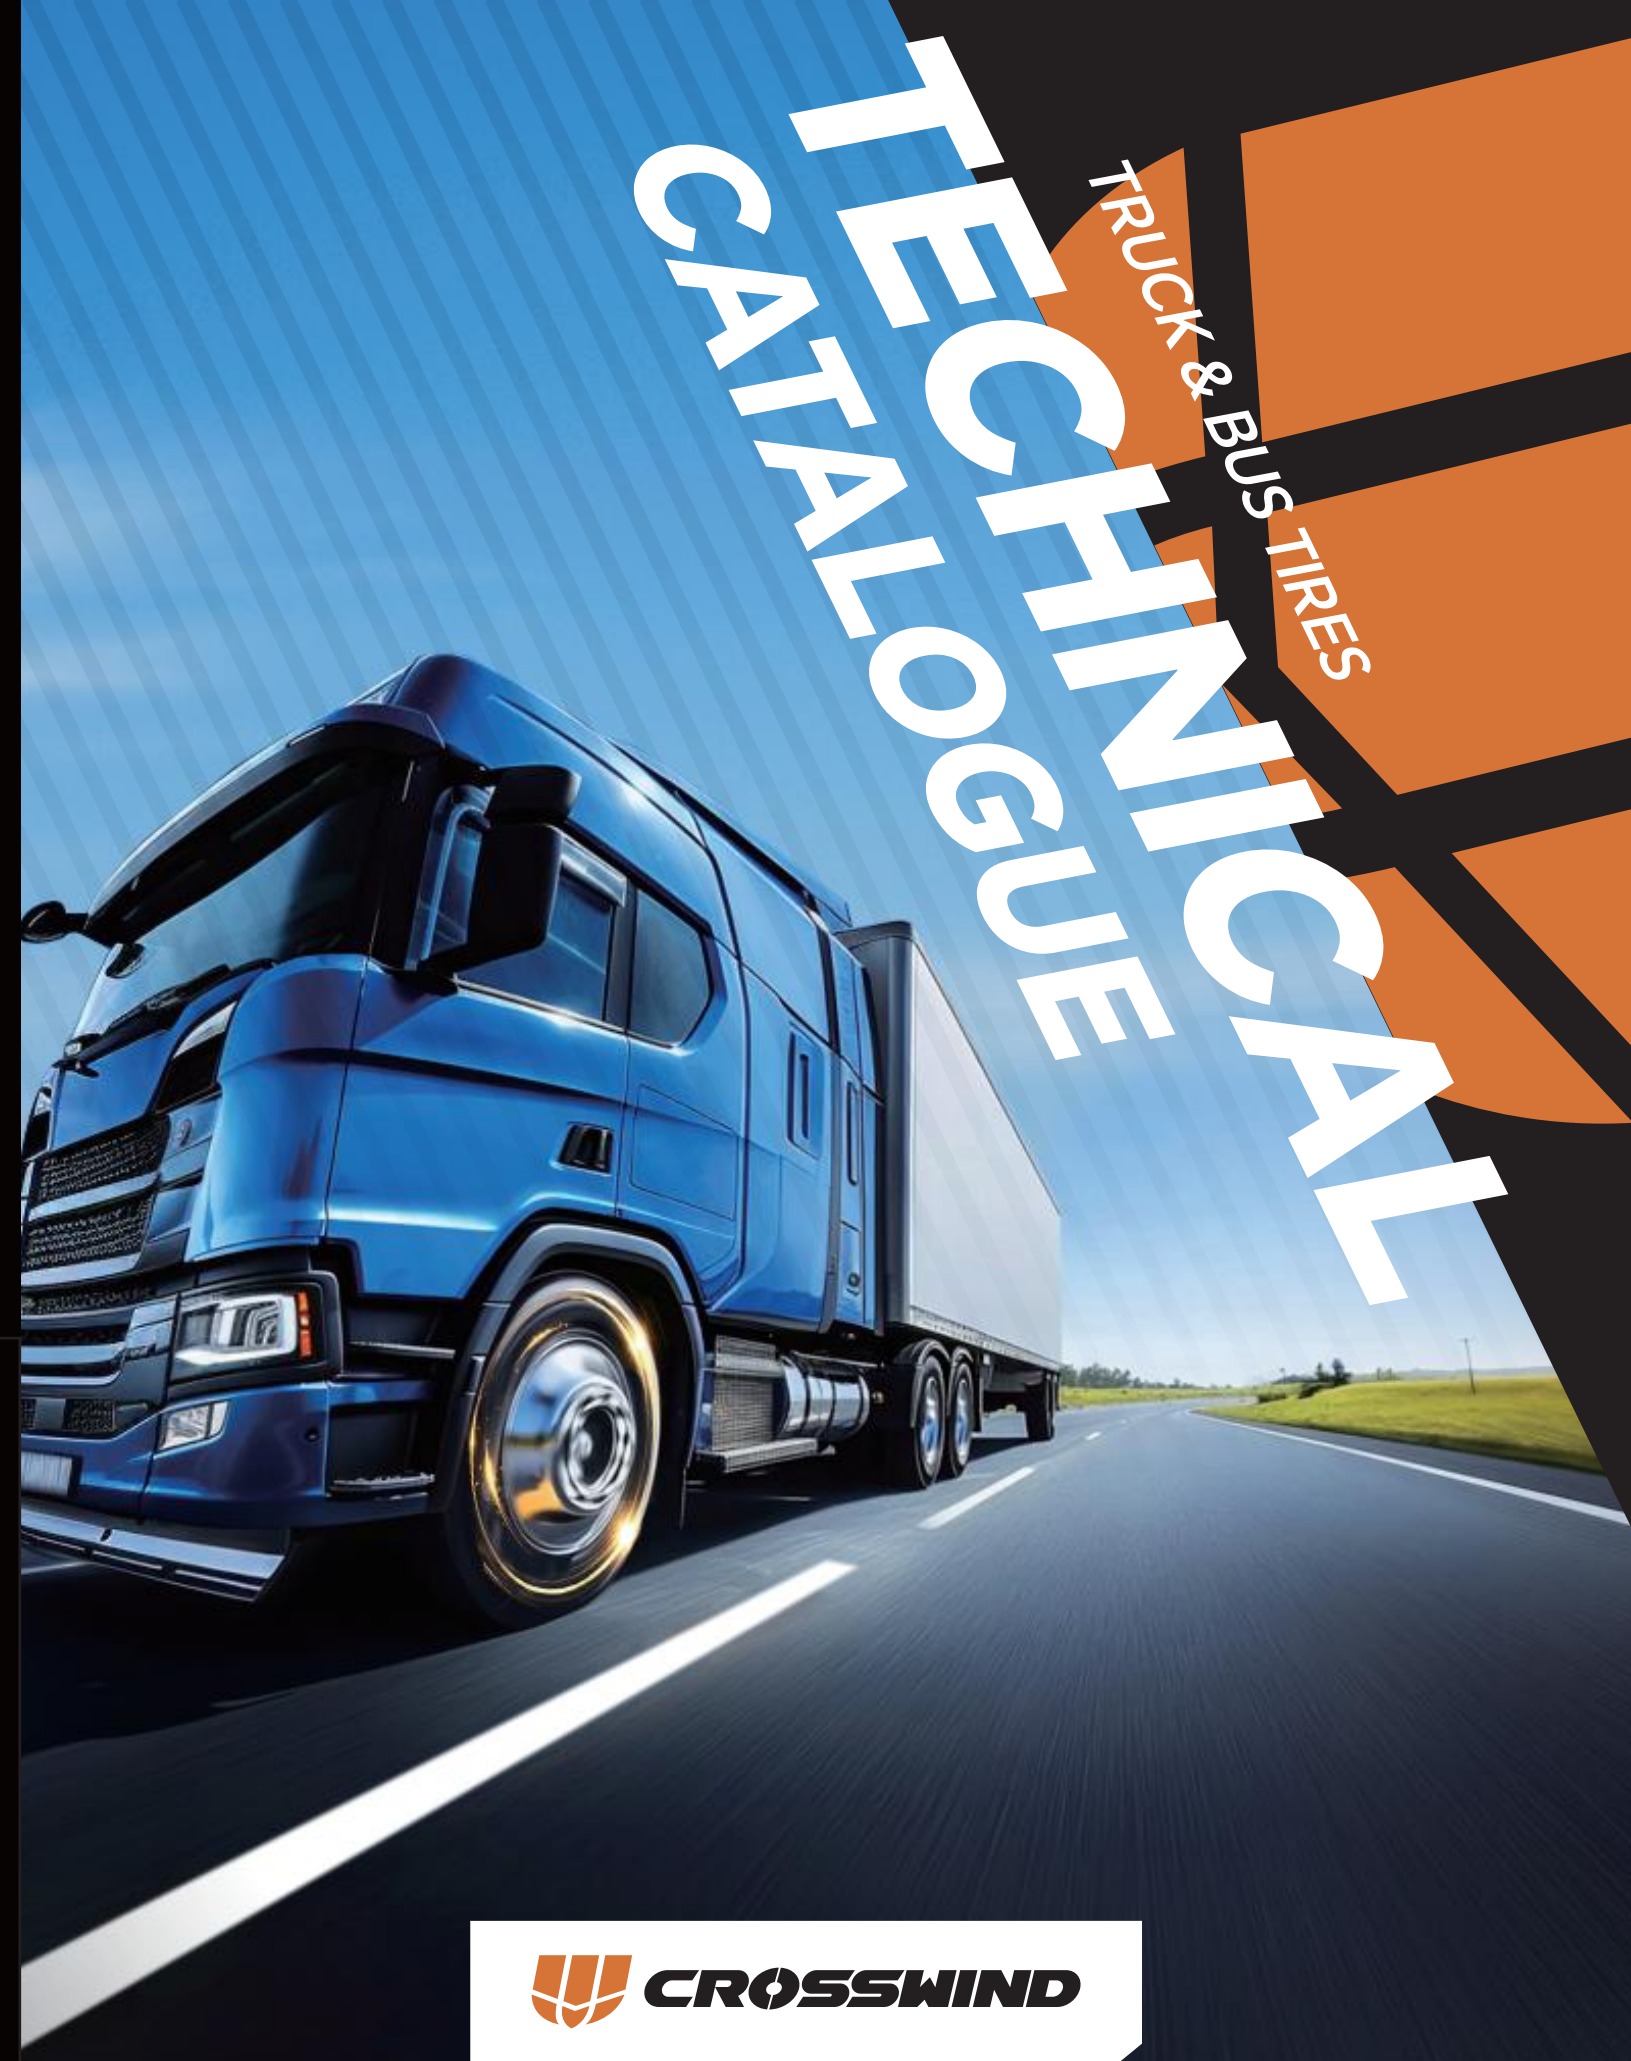

Contents

1 LONG HAUL

CW-LT01	03
CWS10E	04
CWD10E	05
CWT10E	06

2 REGIONAL

CW-RS03	09
CW-RD03	10
CW-RT03	11
CW-HS02	12
CW-HD02	13
CWD20E	14
CWD30K	15
CWS20E	16
CWS30K	17
CWT30K	18

03-06

09-19

3 ON&OFF ROAD

CW-MA04	21
CW-MD04	22
CWA40K	23
CWA40X	24
CWD40K	25

4 LIGHT TRUCK

CW-HS02	27
CW-HD02	28
CW-HT02	29
CWT20E	30
CWS20E	31
CWD20E	32

5 WINTER

CW-WD06	35
CW-WS06	36

6 COACH&URBAN

CWA80U	38
--------	----

21-25

27-32

35-36

38-38

LONG HAUL



CW-LT01

P03

CWS10E

P04

CWD10E

P05

CWT10E

P06

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CW-LT01

SERBIA

Radial Truck Tire
(For international long-distance transportation)

- 1 Center ribs stiffeners with hidden grooves for wear and cornering performance.
- 2 Edge blades to prevent groove edge river wear.
- 3 Blades variable depth for optimum rib flexion, uniform wear and wet braking performance.



TRAILER

Suitable for trailer axle of trucks running with high speed on highway.



CWS10E

SERBIA

Radial Truck Tire
(For international long-distance transportation)

- 1 Low rolling resistance, reducing fuel consumption.
- 2 Lasting grip and stability by hidden groove design.
- 3 New pattern design improves mileage for long-distance transportation.



STEER

Suitable for steer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R19.5	18	156	J	12.25	--	--	4000	900	919	386	11.5	ETRTO
435/50R19.5	20	160	J	14.00	--	--	4500	900	931	438	11.5	ETRTO
445/45R19.5	20	160	J	15.00	--	--	4500	900	895	446	10.5	ETRTO

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	12.5	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	12.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	13.0	ETRTO



CWD10E

SERBIA

Radial Truck Tire
(For international long-distance transportation)

- 1 Low rolling resistance reduces fuel consumption.
- 2 Lasting grip and stability by hidden groove design with M+S and 3PMSF marking.
- 3 New pattern design improves mileage for long distance transportation.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	16.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	16.0	ETRTO



CWT10E

SERBIA

Radial Truck Tire
(For international long-distance transportation)

- 1 Low rolling resistance reduces fuel consumption.
- 2 Lasting grip and stability by hidden groove design.
- 3 New pattern design improves mileage for long-distance transportation.



TRAILER

Suitable for trailer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R19.5	18	156	J	12.25	--	--	4000	900	919	386	12.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	12.0	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	12.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	13.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	13.5	ETRTO
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	14.5	TRA
425/65R22.5	20	165	K	12.25	--	--	5150	825	1124	422	14.5	ETRTO
435/50R19.5	18	156	J	14.00	--	--	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	--	--	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	--	--	4000	900	895	446	12.5	ETRTO
445/45R19.5	20	160	J	15.00	--	--	4500	900	895	446	12.5	ETRTO



REGIONAL



CW-RS03 **CW-RD03** **CW-RT03** **CW-HS02** **CW-HD02**

P09

P10

P11

P12

P13



CWD20E **CWD30K** **CWS20E** **CWS30K** **CWT30K**

P14

P15

P16

P17

P18

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CW-RS03

SERBIA

- 1 Blades variable depth for optimum rib flexion, uniform wear and wet braking performance.
- 2 Slightly directional design to provide grip in forward & braking direction.
- 3 Groove stone ejectors help prevent stone trapping and drilling to enhance casing toughness and retreadability.



STEER

Suitable for steer axle of trucks running with high speed on highway.



CW-RD03

SERBIA

- 1 New sipes Improve grip and resistance to tread tearing in severe conditions of use.
- 2 New groove shapes provides greater traction on slippery road surfaces.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	12.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	13.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	14.5	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	12.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	14.5	ETRTO

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	16.0	ETRTO
295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	18.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	20.0	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CW-RT03

SERBIA

- 1 New sipes Improve grip and resistance to tread tearing in severe conditions of use.
- 2 New groove shapes provides greater traction on slippery road surfaces.



TRAILER

Suitable for trailer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R22.5	20	160(158)	K(L)	12.25	--	---	4500	900	996	386	12.5	ETRTO
385/65R22.5	20	164(158)	K(L)	11.75	--	---	5000	900	1072	389	13.5	ETRTO
425/65R22.5	20	165	K	12.25	--	---	5150	825	1124	422	14.0	ETRTO

CW-HS02

SERBIA

- 1 Suitable for medium trucks running on the high-grade road.
- 2 Stone rejection design protect groove bottom from stone puncture.
- 3 Safe driving and braking thanks to 4 Z-shaped longitudinal grooves.



STEER

Suitable for steer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	12.0	ETRTO
265/70R17.5	18	145/143	J	7.50	2725	900	2900	900	817	262	12.0	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	12.0	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	12.0	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	12.0	ETRTO
305/70R19.5	18	148/145	M	9.00(8.25)	3150	850	2900	850	923	305	12.0	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CW-HD02

SERBIA

- 1 Suitable for medium trucks running on the high-grade road.
- 2 New siping design improves wet performance.
- 3 Low rolling resistance, reducing fuel consumption.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	14.0	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	14.0	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	14.0	ETRTO
305/70R19.5	18	148/145	M	9.00(8.25)	3150	850	2900	850	923	305	13.5	ETRTO



CWD20E

SERBIA

Radial Truck Tire

- 1 Typical block pattern design suitable for the drive axle of trucks.
- 2 Good braking and grip on the road.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	15.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	13.5	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	13.5	TRA
305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	13.5	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CWD30K

SERBIA

Radial Truck Tire
(For national and regional transportation)

- 1 Optimization of the shoulder block improves resistance to shoulder damage.
- 2 Lasting grip and stability with M+S and 3PMSF marking.
- 3 High wear resistance.



DRIVE

Suitable for the drive axle of trucks running under a wide range of use, from highway to light unpaved road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	20.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	18.0	ETRTO



CWS20E

SERBIA

Radial Truck Tire (Regional Steer)

- 1 Long life.
- 2 Retreadability.
- 3 Low eccentric wear.



STEER

Suitable for steer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	13.5	ETRTO
285/70R19.5	20	150/148	J	8.25	3150	900	3350	900	895	283	13.5	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	12.0	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	12.0	TRA
305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	12.0	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CWS30K

Radial Truck Tire
(For national and regional transportation)

- 1 Optimization of the shoulder block improves resistance to shoulder damage.
- 2 Lasting grip and stability with stone rejection design.
- 3 High wear resistance.



STEER

Suitable for the steer axle of trucks running under a wide range of use, from highway to light unpaved road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.5	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	15.5	TRA
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	12.5	ETRTO
315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	12.5	ETRTO
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	14.0	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	13.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO




CWT30K

SERBIA

Radial Truck Tire (Regional Trailer)

- 1 Typical combined pattern design offers optimal trailer performance.
- 2 Low rolling resistance.
- 3 Wear-resistance compound reduces shifting to prevent uneven wear.



TRAILER

Suitable for trailer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	L	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO
385/65R22.5	24	164	J	11.75	---	---	5000	900	1072	389	16.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	---	---	5000	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	K	12.25	---	---	5150	825	1124	422	17.5	ETRTO
445/65R22.5	20	169	J	13.00	---	---	5800	900	1150	444	18.0	ETRTO
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	---	---	4500	900	996	386	16.5	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



ON&OFF ROAD



CW-MA04

P21

CW-MD04

P22

CWA40K

P23

CWA40X

P24

CWD40K

P25

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CW-MA04

SERBIA

- 1 Tread Compound helps resist cuts and chips for enhanced retreadability.
- 2 Groove stone ejectors help prevent stone trapping and drilling to enhance casing toughness and retreadability.
- 3 All-position tread design helps enhance traction on and off the road.



All Position

Suitable for all position axle of trucks running with high speed on highway.



CW-MD04

SERBIA

- 1 Progressive, variable-width grooves, less stone retention.
- 2 New groove shapes provides greater traction on slippery road surfaces.
- 3 New tread compound improved resistance to wear and tear.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	17.0	ETRTO

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CWA40K

SERBIA

Radial Truck Tire (On&Off Road)

- 1 Thick sidewall design protects against sidewall impacts and bruises.
- 2 Stone rejection design protects groove bottom from stone puncture.
- 3 Lasting grip and stability with M+S and 3PMSF marking.



ALL POSITION

Suitable for all position axle of trucks running with high speed on highway.



CWA40X

SERBIA

Radial Truck Tire (On&Off Road)

- 1 Thick sidewall design protects against sidewall impacts and bruises.
- 2 Stone rejection design protects groove bottom from stone puncture.
- 3 Lasting grip and stability with M+S marking.



TRAILER/STEER

Suitable for trailer/steer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	17.0	GB
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	19.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	19.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO
425/65R22.5	20	165	K	13.0	—	---	5150	825	1124	430	18.5	ETRTO
445/65R22.5	20	169	J/K	14.0	—	---	5800	900	1150	454	18.5	ETRTO

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	L	11.75	—	---	4250	850	1072	389	18.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	—	---	4500	900	1072	389	18.0	ETRTO
385/65R22.5	24	164	J	11.75	—	---	5000	900	1072	389	18.0	ETRTO
425/65R22.5	20	165	K	12.25	—	---	5150	825	1124	422	18.5	ETRTO



CWD40K

SERBIA

Radial Truck Tire (On&Off Road)

- 1 Thick sidewall design protects against sidewall impacts and bruises.
- 2 Stone rejection design protects groove bottom from stone puncture.
- 3 Lasting grip and stability with M+S and 3PMSF marking.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



LIGHT TRUCK



CW-HS02 CW-HD02 CW-HT02 CWT20E CWS20E CWD20E

P27

P28

P29

P30

P31

P32

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN



CW-HS02

SERBIA

- 1 Suitable for medium trucks running on the high-grade road.
- 2 Stone rejection design protect groove bottom from stone puncture.
- 3 Safe driving and braking thanks to 4 Z-shaped longitudinal grooves.



STEER

Suitable for the steer axle of trucks running under a wide range of use, from highway to light unpaved road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	10.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	10.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	10.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	11.0	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	11.0	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	11.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	11.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	11.0	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	11.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	11.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	900	2725	900	789	248	11.0	ETRTO
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	11.0	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	11.0	ETRTO
245/70R19.5	18	141/140	J	7.50	2500	850	2575	850	839	248	11.0	ETRTO

CW-HD02

SERBIA

- 1 Suitable for medium trucks running on the high-grade road.
- 2 New siping design improves wet performance.
- 3 Low rolling resistance, reducing fuel consumption.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	11.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	11.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	12.0	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.0	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.0	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	13.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	13.0	ETRTO
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	13.0	ETRTO



CW-HT02

SERBIA

- 1 Suitable for medium trucks running on the high-grade road.
- 2 New siping design improves wet performance.
- 3 Low rolling resistance, reducing fuel consumption.



TRAILER

Suitable for trailer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
205/65R17.5	16	129/127 (132/132)	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	11.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	11.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	11.0	ETRTO
235/75R17.5	18	143/141 (145/145)	J(F)	6.75	2575	875	2725	875	797	233	11.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	900	2725	900	789	248	11.0	ETRTO
245/70R17.5	18	143/141 (146/146)	J(F)	7.50	2575	900	2725	900	789	248	11.0	ETRTO



CWT20E

SERBIA

Radial Truck Tire (Regional Trailer)

- 1 Suitable for medium trucks running on the high-grade road.



TRAILER

Suitable for trailer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
205/65R17.5	16	129/127 (132/132)	J(G)	6.00	1750	900	1850	900	711	205	12.5	ETRTO
215/75R17.5	14	125/122	L	6.00	1500	760	1650	760	767	211	12.5	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	12.5	GB
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO



CWS20E

SERBIA

- 1 Suitable for medium trucks running on the high-grade road.
- 2 Stone rejection design protect groove bottom from stone puncture.
- 3 Safe driving and braking thanks to 4 Z-shaped longitudinal grooves.



STEER

Suitable for steer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	10.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	11.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	11.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	12.5	ETRTO
245/70R19.5	18	141/140	J	7.50	2500	850	2575	850	839	248	12.5	ETRTO
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	13.5	ETRTO
265/70R17.5	18	145/143	J	7.50	2725	900	2900	900	817	262	13.5	ETRTO

CWD20E

SERBIA

- 1 Typical block pattern design suitable for the drive axle of trucks.
- 2 Good braking and grip on the road.



DRIVE

Suitable for trailer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	11.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	13.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	14.5	ETRTO
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	15.5	ETRTO



WINTER



CW-WD06

P35



CW-WS06

P36



CW-WS06

SERBIA

- 1 Suitable for steer and trailer axle of trucks under snow condition.
- 2 Deeper and higher density of lateral grooves and sipes for better grip.
- 3 Zig-Zag grooves design provides excellent traction on icy and wet road condition.



STEER

Suitable for steer axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	15.5	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO



CW-WD06

SERBIA

- 1 Suitable for drive axle of trucks under snow condition.
- 2 Lasting grip and stability ,with 3PMSF marking.
- 3 Optimized rib contact combats uneven wear and improves wet handling and braking.



DRIVE

Suitable for drive axle of trucks running with high speed on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	18	154/149	M	900	3250	850	3750	850	1044	298	18.5	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	900	3350	900	4000	900	1014	312	20.0	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	900	3350	900	4250	900	1076	312	20.0	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN

COACH&URBAN



CWA80U

P37

CWA80U

SERBIA

Radial Bus Tire (Urban all position)

- 1 Enhanced sidewall ensures high safety.
- 2 Tire strength is increased by 35%,with application of ST steel cord.
- 3 Tire bead cracking is prevented,with application fiber layer in bead area.



All Position

Suitable for all position axle of trucks running with high speed on highway.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual	Single						
275/70R22.5	16	148/145	J	8.25	2900	900	3150	900	958	276	19.0	ETRTO



LONG HAUL

REGIONAL

ON&OFF ROAD

LIGHT TRUCK

WINTER

COACH&URBAN