


PCR TIRE CATALOGUE

EVOLUXX



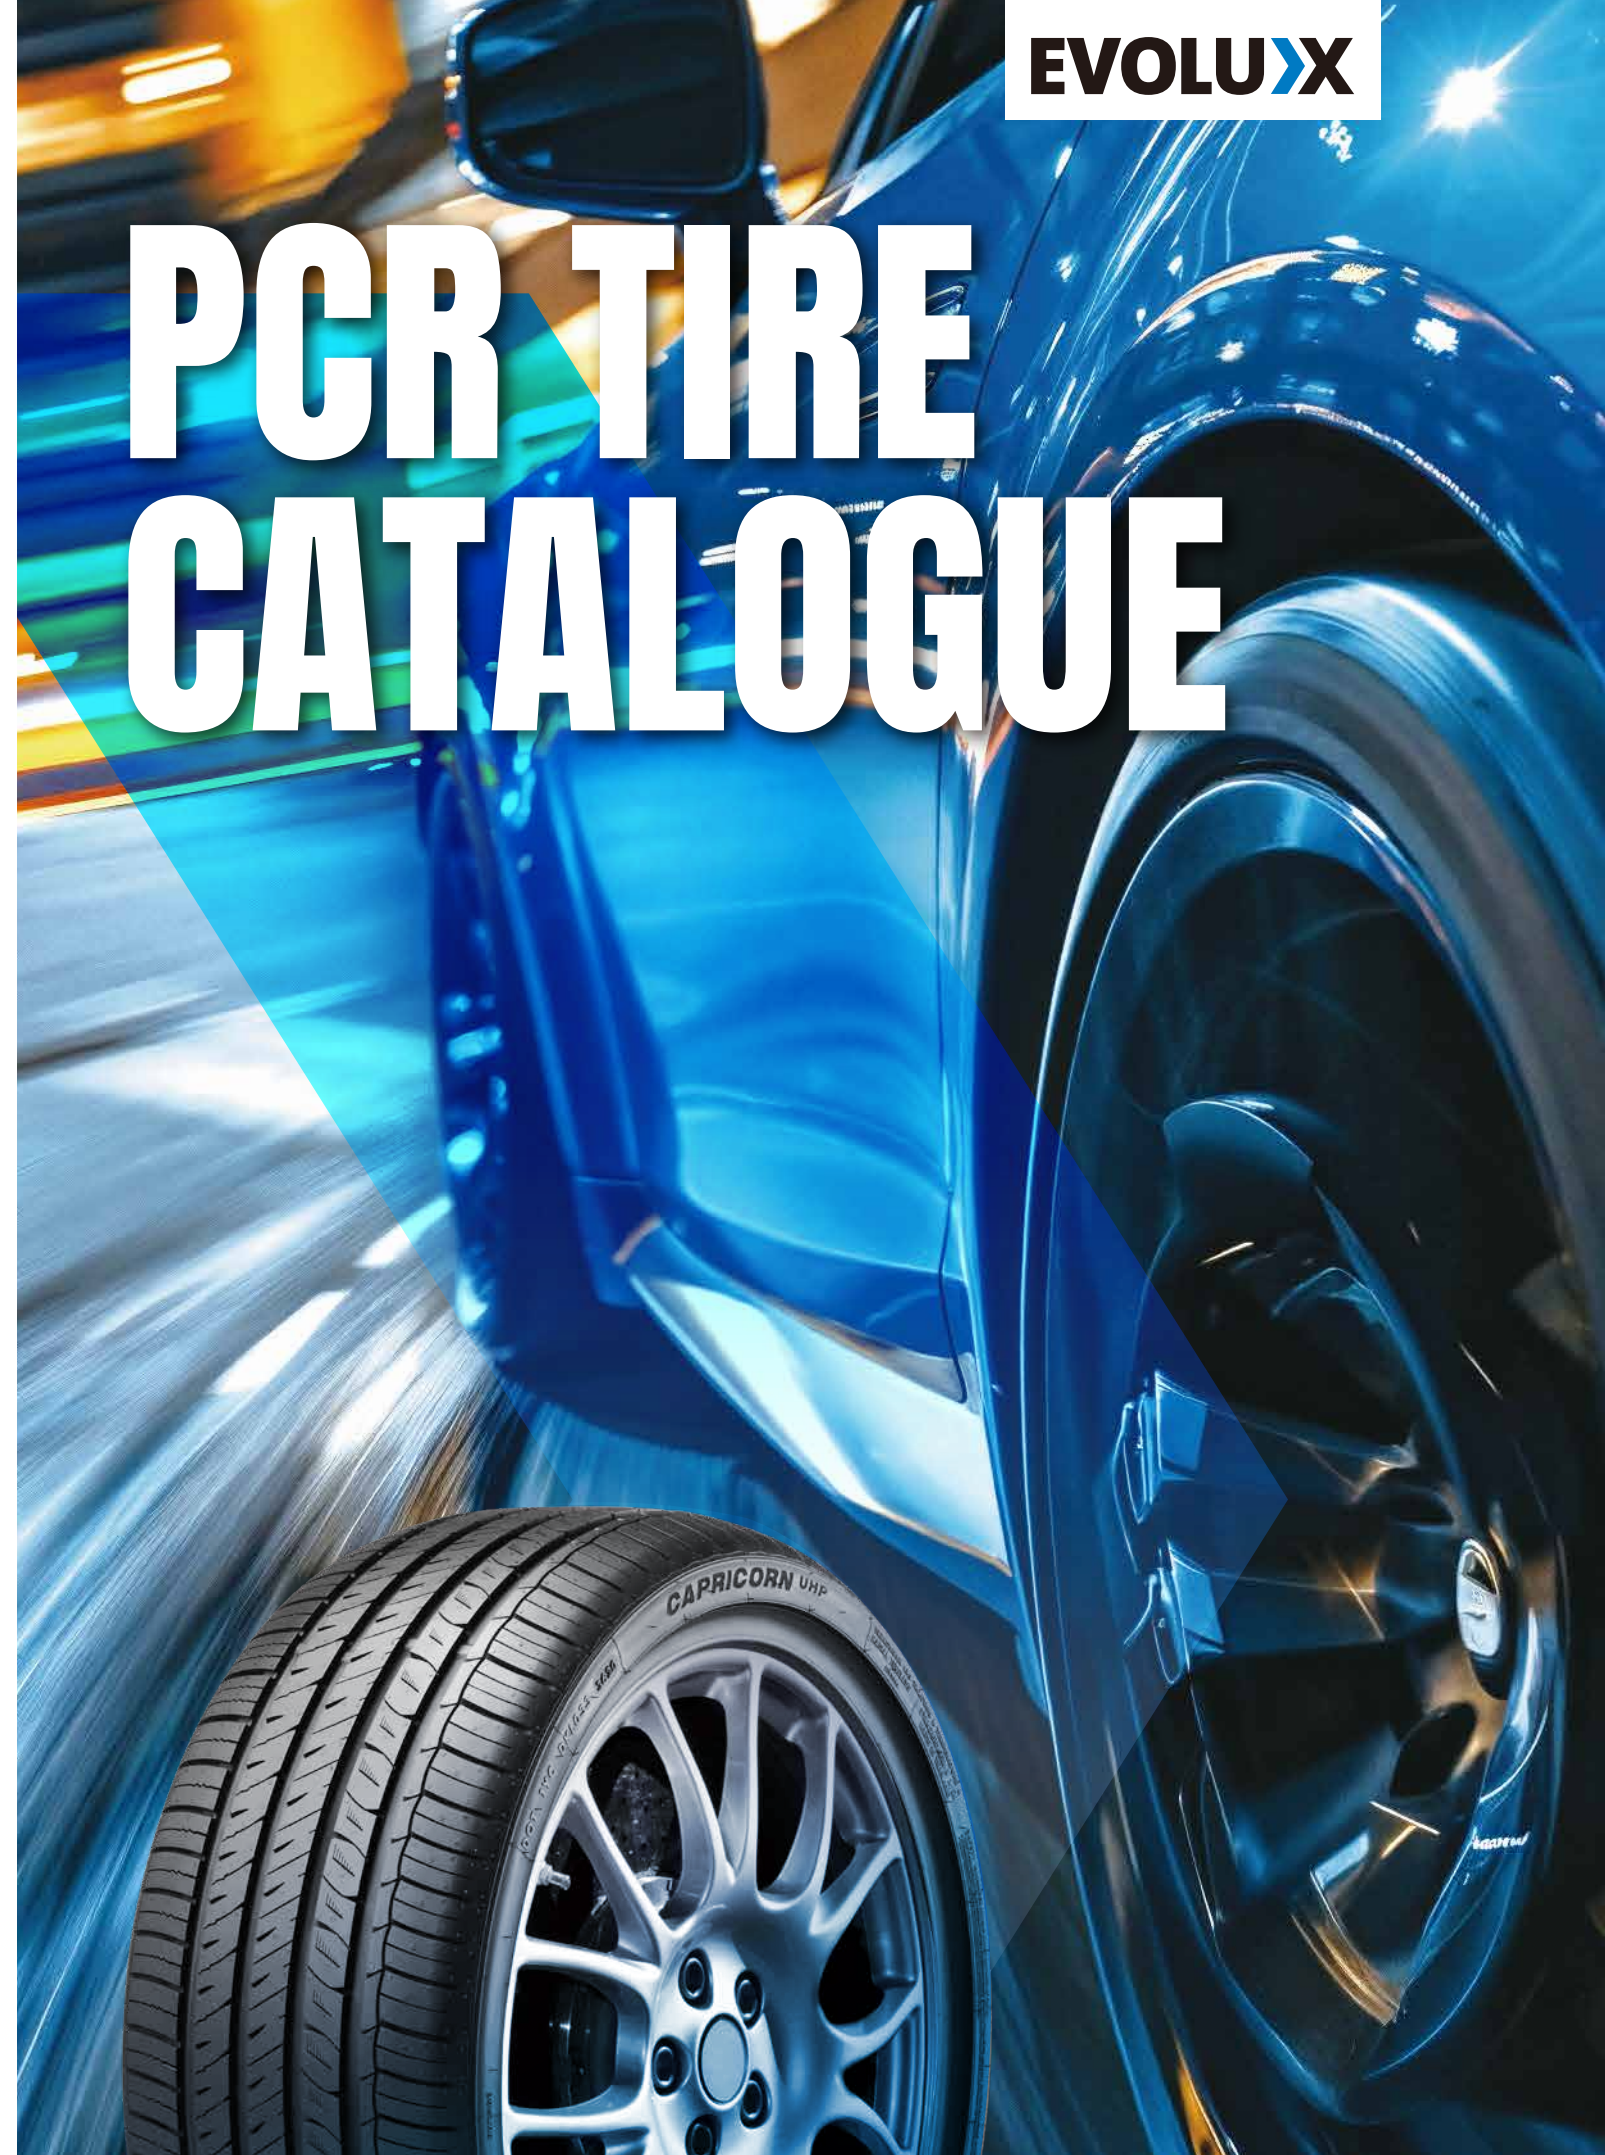

CAPRICORN UHP



CAPRICORN HP



CAPRICORN 4X4 HP



ROTATOR H/T



ROTATOR A/T



SAGITTA X/T



ROTATOR R/T



ROTATOR M/T

CONTENTS

08	CAPRICORN UHP
10	CAPRICORN HP
14	CAPRICORN 4×4 HP
16	ROTATOR H/T
18	ROTATOR A/T
20	SAGITTA X/T
22	ROTATOR R/T
26	ROTATOR M/T

COMPANY PROFILE

A red sports car is shown in motion on a dark track at night, kicking up a cloud of white smoke from its rear tires. The car is positioned on the left side of the frame, angled towards the right. The background is dark with some distant lights. Overlaid on the image are large, semi-transparent blue geometric shapes, including a large triangle on the left and a large triangle on the right, creating a modern, high-tech aesthetic.

Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales. Founded in 1975, the company, with over 40-year forging ahead, has seven R&D centers, seven manufacturing bases across the world currently and over 19,000 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets. Linglong Tire had successful access to the A share market on July 6, 2016. It has been included in the three international indexes, the MSCI Index, the FTSE Russell Index and the S&P Emerging Market Indexes, winning the unanimous favor of the international capital market.

Linglong Group Co., Ltd. invested nearly 1.3 billion yuan, in cooperation with Spain IDIADA, to build Sino-Asia Tire Proving Ground, the first in China and among the top-ranking in the world, by referring to the highest international standards, which greatly improves the Company's R&D strength and R&D efficiency, helps the synchronous R&D with auto-makers in a more in-depth, professional and scientific way, and considerably shortens the development cycle.



ROTATOR M/T
MUD-TERRAIN



ROTATOR R/T
RUGGED-TERRAIN



SAGITTA X/T
EXTREME ALL-TERRAIN



ROTATOR A/T
ALL-TERRAIN

Sport



CAPRICORN UHP
PCR ULTRA HIGH PERFORMANCE



CAPRICORN 4x4 HP
SUV ULTRA HIGH PERFORMANCE

Off Road

On Road

ALL SEASON
ALL WEATHER

Comfort



ROTATOR H/T
HIGHWAY-TERRAIN



CAPRICORN HP
PCR HIGH PERFORMANCE

2025
NEW

EVOLUXX



PASSENGER CAR TIRE




CAPRICORN UHP



CAPRICORN HP

CAPRICORN UHP

PCR Ultra High Performance

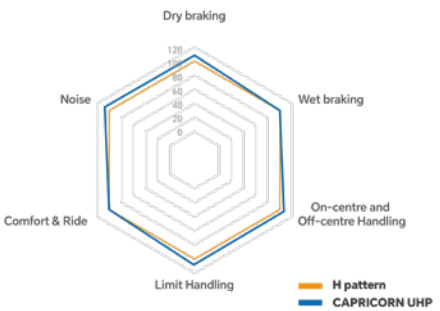

Superb handling performance

- Outside large shoulder blocks improve tire rigidity and handling
- 3D sipes balance the tread block stiffness and improve handling performance

Excellent dry and wet braking

- Four longitudinal grooves improve braking performance and traction performance on wet roads
- New generation tread compound can be used all season ,and improve wet and dry braking performance



CAPRICORN UHP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	195/45R16 XL		84	V	61/2J	500	1102	340	50
	205/50R16 XL		91	W	61/2J	615	1356	340	50
	205/55R16 XL		94	W	61/2J	670	1477	340	50
	215/55R16 XL		97	W	7J	730	1609	340	50
	225/50R16 XL		96	V	7J	710	1565	340	50
17	205/40R17 XL		84	W	71/2J	500	1102	340	50
	205/45R17 XL		88	W	7J	560	1235	340	50
	205/50R17 XL		93	W	61/2J	650	1433	340	50
	215/40R17 XL		87	W	71/2J	545	1201	340	50
	215/45R17 XL		91	W	7J	615	1356	340	50
	215/50R17 XL		95	W	7J	690	1521	340	50
	215/55R17 XL		98	W	7J	750	1653	340	50
	225/45R17 XL		94	W	71/2J	670	1477	340	50
	225/50R17 XL		98	W	7J	750	1653	340	50
	235/45R17 XL		97	W	8J	730	1609	340	50
	245/40R17 XL		95	W	81/2J	690	1521	340	50
	245/45R17 XL		99	W	8J	775	1709	340	50
	215/35R18 XL		84	W	71/2J	500	1102	340	50
18	215/40R18 XL		89	Y	71/2J	580	1279	340	50
	225/40R18 XL		92	Y	8J	630	1389	340	50
	225/45R18 XL		95	W	71/2J	690	1521	340	50
	225/50R18		95	V	7J	690	1521	300	44
	235/40R18 XL		95	W	81/2J	690	1521	340	50
	235/45R18 XL		98	Y	8J	750	1653	340	50
	235/50R18 XL		101	W	71/2J	825	1819	340	50
	245/40R18 XL		97	W	81/2J	730	1609	340	50
	245/45R18 XL		100	W	8J	800	1764	340	50
	255/45R18 XL		103	W	81/2J	875	1929	340	50
	275/25R28 XL		99	W	10J	775	1709	340	50
	275/40R18 XL		103	Y	91/2J	875	1929	340	50
	225/35R19 XL		88	W	8J	560	1235	340	50
19	235/35R19 XL		91	W	81/2J	615	1356	340	50
	235/40R19 XL		96	Y	81/2J	710	1565	340	50
	235/55R19 XL		105	Y	71/2J	925	2039	340	50
	245/40R19 XL		98	Y	81/2J	750	1653	340	50
	245/45R19 XL		102	W	8J	850	1874	340	50
	275/30R19 XL		96	W	91/2J	710	1565	340	50
	275/35R19 XL		100	Y	91/2J	800	1764	340	50
	275/40R19 XL		105	Y	91/2J	925	2039	340	50
20	225/35R20 XL		90	W	8J	600	1323	340	50
	235/45R20 XL		100	W	8J	800	1764	340	50
	245/35R20 XL		95	W	81/2J	690	1521	340	50
	245/40R20 XL		99	Y	81/2J	775	1709	340	50
	245/45R20 XL		103	Y	8J	875	1929	340	50
	245/50R20		102	V	71/2J	850	1874	300	44
	255/35R20 XL		97	W	9J	730	1609	340	50
	255/45R20 XL		105	Y	81/2J	925	2039	340	50
	275/30R20 XL		97	Y	91/2J	730	1609	340	50
	275/35R20 XL		102	Y	91/2J	850	1874	340	50
	275/40R20 XL		106	Y	91/2J	950	2094	340	50
	275/45R20 XL		110	V	9J	1060	2337	340	50
	275/55R20 XL		117	W	81/2J	1285	2833	340	50
22	235/30R22 XL		90	W	81/2J	600	1323	340	50
	245/30R22 XL		92	W	81/2J	630	1389	340	50
	255/30R22 XL		95	W	9J	690	1521	340	50
	265/35R22 XL		102	W	91/2J	850	1874	340	50
	265/40R22 XL		106	V	91/2J	950	2094	340	50
	285/35R22 XL		106	W	10J	950	2094	340	50
	285/40R22 XL		110	V	10J	1060	2337	340	50
	285/45R22 XL		114	W	91/2J	1180	2601	340	50
	295/25R22 XL		97	W	101/2J	730	1609	340	50
	305/40R22 XL		114	V	11J	1180	2601	340	50
24	305/45R22 XL		118	V	10J	1320	2910	340	50
	255/30R24 XL		97	W	9J	730	1609	340	50
	275/25R24 XL		96	W	10J	710	1565	340	50
	295/35R24 XL		110	V	101/2J	1060	2337	340	50
	305/35R24 XL		112	V	11J	1120	2469	340	50
26	275/25R26 XL		98	W	10J	750	1653	340	50
	295/30R26 XL		107	W	101/2J	975	2149	340	50
	305/30R26 XL		109	W	11J	1030	2271	340	50
28	275/25R28 XL		99	W	10J	775	1709	340	50
	295/25R28 XL		103	V	101/2J	875	1929	340	50
30	275/25R30 XL		101	W	10J	825	1819	340	50

CAPRICORN HP

PCR High Performance



Impressive Driving Comfort

- › Tread blocks with high density sipes provide driving comfort and all season performance

Outstanding handling performance

- › Five rib design is engineered to increase contact area for improved steering response and handling
- › With its multi-notch design, water is swiftly channeled into four broad circumferential grooves, guaranteeing excellent traction and braking performance in wet conditions.



CAPRICORN HP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
14	185/60R14		82	H	51/2J	475	1047	300	44
	185/65R14		86	H	51/2J	530	1168	300	44
	195/70R14		91	H	6J	615	1356	300	44
15	185/60R15		84	H	51/2J	500	1102	300	44
	185/65R15		88	H	51/2J	560	1235	300	44
	195/50R15 XL		86	V	6J	530	1168	340	50
	195/55R15		85	V	6J	515	1135	300	44
	195/60R15		88	H	6J	560	1235	300	44
	195/65R15		91	H	6J	615	1356	300	44
	205/65R15		94	H	6J	670	1477	300	44
	215/60R15		94	H	61/2J	670	1477	300	44
	215/65R15 XL		100	H	61/2J	800	1764	340	50
	255/70R15		108	S	71/2J	1000	2205	300	44
16	205/55R16		91	H	61/2J	615	1356	300	44
	205/60R16		92	H	6J	630	1389	300	44
	205/65R16		95	H	6J	690	1521	300	44
	215/60R16		95	H	61/2J	690	1521	300	44
	215/65R16		98	H	61/2J	750	1653	300	44
	225/55R16		95	V	7J	690	1521	300	44
	225/60R16		98	H	61/2J	750	1653	300	44
	225/65R16		100	H	61/2J	800	1764	300	44
	225/70R16 XL		107	H	61/2J	975	2149	340	50
	235/60R16		100	H	7J	800	1764	300	44
17	235/65R16		103	H	7J	875	1929	300	44
	215/55R17		94	V	7J	670	1477	300	44
	215/60R17		96	H	61/2J	710	1565	300	44
	215/65R17		99	H	61/2J	775	1709	300	44
	225/55R17		97	H	7J	730	1609	300	44
	225/60R17		99	H	61/2J	775	1709	300	44
	225/65R17		102	H	61/2J	850	1874	300	44
	235/55R17		99	H	71/2J	775	1709	300	44
	235/60R17		102	H	7J	850	1874	300	44
	235/65R17		104	H	7J	900	1984	300	44
18	225/55R18		98	H	7J	750	1653	300	44
	235/65R18		106	H	7J	950	2094	300	44

EVOLUX

LIGHT TRUCK & SUV TIRE



CAPRICORN 4x4 HP

ROTATOR H/T

ROTATOR A/T




SAGITTA X/T

ROTATOR R/T

ROTATOR M/T

CAPRICORN 4x4 HP

SUV Ultra High Performance

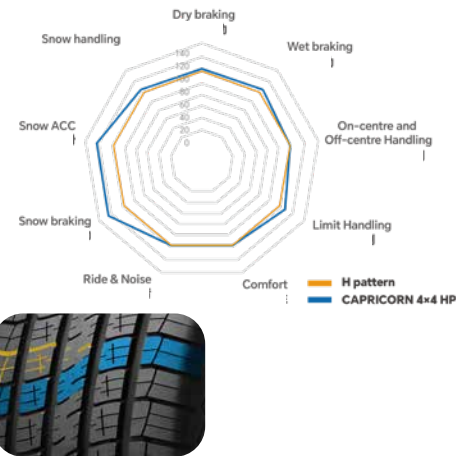

Excellent All Season traction & braking performance

- › Siping design along with large amount of biting edges generates snow traction
- › The open shoulder and step shaped edges help evacuate water and slush to enhance all weather traction and steering response
- › Five rib design enhances rubber to ground contact area for better dry braking performance

Outstanding handling performance

- › High hardness apex compound and apex height provide excellent steering and handling performance
- › Large shoulder blocks and continuous central rib to promote driving experience and stability



CAPRICORN 4x4 HP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	205/70R15		96	H	6J	710	1565	300	44
	235/70R15		103	H	7J	875	1929	300	44
16	205/70R16		97	V	6J	730	1609	300	44
	215/65R16 XL		102	H	61/2J	850	1874	340	50
	215/70R16		100	H	61/2J	800	1764	300	44
	225/60R16		98	H	61/2J	750	1653	300	44
	225/75R16		104	H	6J	900	1984	300	44
	235/70R16		106	H	7J	950	2094	300	44
	245/70R16 XL		111	H	7J	1090	2403	340	50
	265/70R16		112	H	8J	1120	2469	300	44
	275/70R16		114	H	8J	1180	2601	300	44
17	215/60R17		96	H	61/2J	710	1565	300	44
	225/55R17 XL		101	V	7J	825	1819	340	50
	225/60R17		99	H	61/2J	775	1709	300	44
	225/65R17		102	H	61/2J	850	1874	300	44
	235/55R17 XL		103	V	71/2J	875	1929	340	50
	235/60R17 XL		106	V	7J	950	2094	340	50
	235/65R17 XL		108	V	7J	1000	2205	340	50
	235/70R17 XL		109	T	7J	1030	2271	340	50
	245/65R17 XL		111	H	7J	1090	2403	340	50
	255/60R17		106	H	71/2J	950	2094	300	44
	255/65R17		110	H	71/2J	1060	2337	300	44
	255/70R17		112	T	71/2J	1120	2469	300	44
	265/65R17		112	H	8J	1120	2469	300	44
	275/55R17		109	V	81/2J	1030	2271	300	44
18	225/60R18		100	H	61/2J	800	1764	300	44
	235/55R18 XL		104	V	71/2J	900	1984	340	50
	235/60R18 XL		107	V	7J	975	2149	340	50
	235/65R18		106	H	7J	950	2094	300	44
	245/60R18		105	V	7J	925	2039	300	44
	255/55R18 XL		109	V	8J	1030	2271	340	50
	255/60R18 XL		112	V	71/2J	1120	2469	340	50
	255/65R18		111	H	71/2J	1090	2403	300	44
	255/70R18		113	T	71/2J	1150	2535	300	44
	265/60R18		110	H	8J	1060	2337	300	44
	265/65R18		114	H	8J	1180	2601	300	44
	265/70R18		116	T	8J	1250	2756	300	44
	275/60R18		113	H	8J	1150	2535	300	44
	275/65R18		116	H	8J	1250	2756	300	44
19	245/55R19		103	V	71/2J	875	1929	300	44
	255/50R19 XL		107	W	8J	975	2149	340	50
	255/55R19 XL		111	V	8J	1090	2403	340	50
	255/60R19		109	H	71/2J	1030	2271	300	44
20	255/50R20 XL		109	V	8J	1030	2271	340	50
	275/60R20		115	T	8J	1215	2679	300	44

ROTATOR H/T

Highway-Terrain



Blanced dry, wet and snow performance

- › Wide circumferential groove design and optimal void-to-fill ratio balance wet and wear performance
- › High density linear and zigzag siping design improves handling and irregular wear
- › The new generation of modified SSBR tread formula significantly improves the fuel economy and wet grip of the tire, and greatly improves the driving safety in rainy days

Quiet and comfortable ride

- › Multiple variable pitch design optimizes pitch ratio and alignment to achieve low noise level



ROTATOR H/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL		109	T	61/2J	1030	2271	340	50
	31X10.50R15LT	6PR	109	R	81/2J	1030	2270	350	50
16	225/70R16		103	T	61/2J	875	1929	300	44
	245/75R16		111	T	7J	1090	2403	300	44
	255/70R16		111	T	71/2J	1090	2403	300	44
	265/75R16		116	T	71/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	S	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16	10PR	115/112	S	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT235/85R16	10PR	120/116	R	61/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16	10PR	120/116	R	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16	10PR	123/120	R	71/2J	D 1400 S 1550	D 3085 S 3415	550	80
17	235/65R17		104	T	7J	900	1984	300	44
	245/70R17		110	T	7J	1060	2337	300	44
	265/65R17		112	T	8J	1120	2469	300	44
	265/70R17		115	T	8J	1215	2679	300	44
	275/65R17		115	S	8J	1215	2679	300	44
	285/65R17		116	S	81/2J	1250	2756	300	44
	LT235/80R17	10PR	120/117	R	61/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/75R17	10PR	121/118	R	7J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
18	LT265/70R18	10PR	124/121	R	8J	D 1450 S 1600	D 3195 S 3525	550	80
	LT275/65R18	10PR	123/120	S	8J	D 1285 S 1550	D 2835 S 3415	550	80
	LT275/70R18	10PR	125/122	S	8J	D 1400 S 1650	D 3085 S 3640	550	80
20	265/50R20 XL		111	H	81/2J	1090	2403	340	50
	275/55R20 XL		117	T	81/2J	1285	2833	340	50

ROTATOR A/T

All-Terrain



Extra sidewall protection against cuts, impacts, and punctures

- ▶ Lugs featured with chamfered edges constrain the deformation when touching the ground, thus enhances the abnormal wear and tear resistance
- ▶ Buttress design from extended shoulder improves traction capability especially on soft ground
- ▶ By incorporating self-crystallizing raw rubber and low-molecular plasticizers for self-reinforcement, along with high-strength reinforcing particles, the tear resistance of the tread block compound is greatly enhanced

Perfect grip on snow surfaces

- ▶ High-density sipes offer excellent handling and snow/wet traction
- ▶ Advanced polymers ensure the rubber compound remains flexible and elastic at low temperatures, while small-molecule plasticizers work synergistically to maintain superior viscoelasticity in cold environments. Nano-filler particles further enhance performance by breaking through the microscopic water film on icy and snowy surfaces, delivering exceptional traction in winter conditions




ROTATOR A/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL OWL		109	T	61/2J	1030	2271	340	50
	265/70R15 OWL		112	T	8J	1120	2469	300	44
	LT235/75R15 OWL	6PR	104/101	R	61/2J	D 825 S 900	D 1820 S 1985	350	50
	30X9.50R15LT OWL	6PR	104	S	71/2J	900	1985	350	50
	31X10.50R15LT OWL	6PR	109	R	81/2J	1030	2270	350	50
16	235/70R16 OWL		106	T	7J	950	2094	300	44
	245/70R16 XL OWL		111	T	7J	1090	2403	340	50
	245/75R16 OWL		111	T	7J	1090	2403	300	44
	255/70R16 OWL		111	S	71/2J	1090	2403	300	44
	265/70R16 OWL		112	T	8J	1120	2469	300	44
	265/75R16 OWL		116	T	71/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16 OWL	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT235/85R16 OWL	10PR	120/116	S	61/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16 OWL	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16 OWL	10PR	123/120	R	71/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16 OWL	10PR	126/123	R	8J	D 1550 S 1700	D 3415 S 3750	550	80
17	LT305/70R16 OWL	10PR	124/121	R	9J	D 1450 S 1600	D 3195 S 3525	450	65
	245/65R17 XL OWL		111	T	7J	1090	2403	340	50
	245/70R17 OWL		110	S	7J	1060	2337	300	44
	265/65R17		112	T	8J	1120	2469	300	44
	265/70R17 OWL		115	T	8J	1215	2679	300	44
	285/70R17 OWL		116	T	81/2J	1250	2756	300	44
	LT235/80R17 OWL	10PR	120/117	R	61/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/75R17 OWL	10PR	121/118	R	7J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17 OWL	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17 OWL	8PR	121/118	S	81/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT285/70R17 OWL	10PR	121/118	S	81/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R17 OWL	8PR	119/116	R	9J	D 1250 S 1360	D 2755 S 3000	350	50
18	255/70R18 OWL		113	S	71/2J	1150	2535	300	44
	265/70R18 OWL		116	T	8J	1250	2756	300	44
	275/65R18 OWL		116	T	8J	1250	2756	300	44
	LT265/65R18 OWL	10PR	122/119	Q	8J	D 1360 S 1500	D 3000 S 3305	550	80
	LT265/70R18 OWL	10PR	124/121	S	8J	D 1450 S 1600	D 3195 S 3525	550	80
	LT275/65R18 OWL	10PR	123/120	S	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/70R18 OWL	10PR	125/122	S	8J	D 1500 S 1650	D 3305 S 3640	550	80
	LT305/60R18 OWL	10PR	121/118	R	9J	D 1320 S 1450	D 2910 S 3195	450	65
20	275/55R20 OWL		113	S	81/2J	1150	2535	300	44
	275/60R20 OWL		115	T	8J	1215	2679	300	44
	35X12.50R20LT OWL	10PR	121	Q	10J	1450	3195	450	65
	LT275/55R20 OWL	10PR	120/117	Q	81/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT275/60R20 OWL	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/65R20 OWL	10PR	126/123	S	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT285/55R20	10PR	122/119	S	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT305/55R20 OWL	10PR	121/118	R	91/2J	D 1320 S 1450	D 2910 S 3195	450	65

SAGITTA X/T

Extreme All-Terrain



Excellent handing performance, Strong mud/rock traction

- › High floatation; High load-carrying capacity
- › Aggressive tread pattern and sidewall design
- › The open shoulder grooves and large trench volume ,improve the drainage of mud under bad road conditions




SAGITTA X/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	265/75R16		116	T	7 1/2J	1250	2756	300	44
	LT245/75R16	10PR	120/116	Q	7J	S 1400 D 1260	S 3085 D 2778	550	80
	LT265/75R16	10PR	123/120	Q	7 1/2J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/75R16	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80
17	265/70R17		115	T	8J	1215	2679	300	44
	LT235/80R17	10PR	120/117	Q	6 1/2J	S 1400 D 1285	S 3085 D 2835	550	80
	LT245/70R17	10PR	119/116	S	7J	S 1360 D 1250	S 3000 D 2755	550	80
	LT245/75R17	10PR	121/118	Q	7J	S 1450 D 1320	S 3195 D 2910	550	80
	LT265/70R17	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/70R17	8PR	122/119	Q	8 1/2J	S 1500 D 1360	S 3305 D 3000	450	65
	35X12.50R17LT	10PR	125	R	10J	1650	3640	450	65
18	275/65R18	XL	116	T	8J	1250	2756	340	50
	LT265/70R18	10PR	124/121	Q	8J	S 1600 D 1450	S 3525 D 3195	550	80
	LT275/65R18	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT275/70R18	10PR	125/122	Q	8J	S 1650 D 1500	S 3640 D 3305	550	80
	LT285/65R18	10PR	125/122	Q	8 1/2J	S 1650 D 1500	S 3640 D 3305	550	80
	33X12.50R18LT	12PR	122	R	10J	1500	3305	550	80
	35X12.50R18LT	10PR	123	R	10J	1550	3415	450	65
20	275/55R20	XL	117	T	8 1/2J	1285	2833	340	50
	275/60R20		115	R	8J	1215	2679	300	44
	LT265/60R20	10PR	121/118	Q	8J	S 1450 D 1320	S 3195 D 2910	550	80
	LT275/55R20	10PR	120/117	S	8 1/2J	S 1400 D 1285	S 3085 D 2835	550	80
	LT275/60R20	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT275/65R20	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80
	LT285/55R20	10PR	122/119	S	9J	S 1500 D 1360	S 3305 D 3000	550	80
	33X12.50R20LT	12PR	119	R	10J	1360	3000	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
22	33X12.50R22LT	12PR	114	R	10 1/2J	1180	2600	550	80
	35X12.50R22LT	12PR	121	R	10J	1450	3195	550	80



ROTATOR R/T

Rugged-Terrain

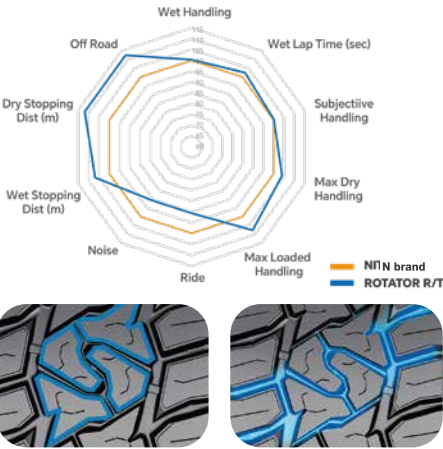

Outstanding off-road traction

- › Staggered angular blocks and ledges between lugs capable of removing sticky clods enhance off-road grip on muddy and sandy surfaces
- › Wide lateral zigzag grooves ensure superb off-road traction in the whole lifetime

Durable construction

- › High-strength three-ply carcass design along with sidewall adopting E-L Max patented technology provides impact and puncture resistance
- › High strength cord protect sidewall from puncture of rugged rock, also can enhancing driving and riding safety



ROTATOR R/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	2270	350	51
16	LT235/85R16	12PR	123/120	Q	6 1/2J	D 1400 S 1550	D 3085 S 3415	650	94
	LT245/75R16	10PR	120/116	Q	7J	D 1250 S 1400	D 2755 S 3085	550	80
	LT265/75R16	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16	12PR	128/125	Q	9J	D 1650 S 1800	D 3640 S 3970	450	65
	LT315/75R16	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65
17	33X12.50R17LT	12PR	121	Q	10J	1450	3195	550	80
	35X12.50R17LT	12PR	121	Q	10J	1450	3195	550	80
	37X12.50R17LT	12PR	121	Q	10J	1450	3195	550	80
	LT235/80R17	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/70R17	10PR	119/116	Q	7J	D 1250 S 1360	D 2755 S 3000	550	80
	LT255/80R17	10PR	121/118	Q	7J	D1320 S1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17	10PR	121/118	Q	8 1/2J	D1320 S1450	D 2910 S 3195	550	80
	LT285/75R17	10PR	121/118	Q	8J	D1320 S1450	D 2910 S 3195	550	80
	LT295/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
18	LT305/70R17	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65
	LT315/70R17	12PR	121/118	Q	9 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	33X12.50R18LT	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	37X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	37X13.50R18LT	12PR	128	Q	11J	1800	3970	550	80
	LT275/65R18	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/70R18	10PR	125/122	Q	8J	D 1500 S 1650	D 3305 S 3640	550	80
	LT285/60R18	10PR	122/119	Q	8 1/2J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R18	10PR	125/122	Q	8 1/2J	D 1500 S 1650	D 3305 S 3640	550	80

ROTATOR R/T


RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18	LT285/75R18	10PR	129/126	Q	8J	D 1700 S 1850	D 3750 S 4080	550	80
	LT295/70R18	10PR	129/126	Q	8 1/2J	D 1700 S 1850	D 3750 S 4080	550	80
	LT325/65R18	10PR	127/124	Q	9 1/2J	D 1600 S 1750	D 3525 S 3860	450	65
20	33X12.50R20LT	12PR	119	Q	10J	1360	3000	550	80
	35X11.50R20LT	10PR	124	Q	9J	1600	3525	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	35X13.50R20LT	12PR	126	Q	11J	1700	3750	550	80
	37X12.50R20LT	12PR	128	Q	10J	1800	3970	550	80
	37X13.50R20LT	12PR	128	Q	11J	1800	3970	550	80
	38X13.50R20LT	10PR	128	Q	11J	1800	3970	450	65
	LT265/60R20	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT275/55R20	12PR	122/119	Q	8 1/2J	D 1360 S 1500	D 3000 S 3305	650	95
	LT275/55R20	10PR	120/117	R	8 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT275/60R20	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/65R20	12PR	128/125	R	8J	D 1650 S 1800	D 3640 S 3970	650	95
	LT285/55R20	12PR	124/121	S	9J	D 1450 S 1600	D 3195 S 3525	650	95
	LT285/55R20	8PR	117/114	Q	9J	D 1400 S 1180	D 3085 S 2600	450	65
	LT285/60R20	10PR	125/122	Q	8 1/2J	D 1500 S 1650	D 3305 S 3640	550	80
	LT285/65R20	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	550	80
	LT295/55R20	10PR	123/120	Q	9 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT295/60R20	10PR	126/123	Q	8 1/2J	D 1550 S 1700	D 3415 S 3750	550	80
	LT295/65R20	10PR	129/126	Q	8 1/2J	D 1700 S 1850	D 3750 S 4080	550	80
	LT305/55R20	12PR	125/122	S	9 1/2J	D 1500 S 1650	D 3305 S 3640	550	80
22	33X12.50R22LT	12PR	114	Q	10J	1180	2600	550	80
	35X12.50R22LT	12PR	121	Q	10J	1450	3195	550	80

ROTATOR R/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
22	37X12.50R22LT	12PR	127	Q	10J	1750	3860	550	80
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
	38X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
	38X15.50R22LT	10PR	128	Q	12 1/2J	1800	3970	450	65
	LT295/50R22	10PR	122/119	Q	9 1/2J	D 1360 S 1500	D 3000 S 3305	550	80
	LT295/55R22	10PR	125/122	Q	9 1/2J	D 1500 S 1650	D 3305 S 3640	550	80
24	LT325/50R22	12PR	127	Q	10J	1750	3860	550	80
	33X12.50R24LT	12PR	106	Q	11 1/2J	950	2095	550	80
	33X13.50R24LT	12PR	110	Q	11J	1060	2335	550	80
	35X12.50R24LT	12PR	116	Q	10 1/2J	1250	2755	550	80
	35X13.50R24LT	12PR	116	Q	12J	1250	2755	550	80
	37X13.50R24LT	12PR	124	Q	11J	1600	3525	550	80
	38X15.50R24LT	12PR	128	Q	12 1/2J	1800	3970	550	80
26	35X13.50R26LT	12PR	111	Q	11J	1090	2405	550	80
	37X13.50R26LT	12PR	117	Q	11J	1285	2835	450	65

ROTATOR M/T

Mud-Terrain

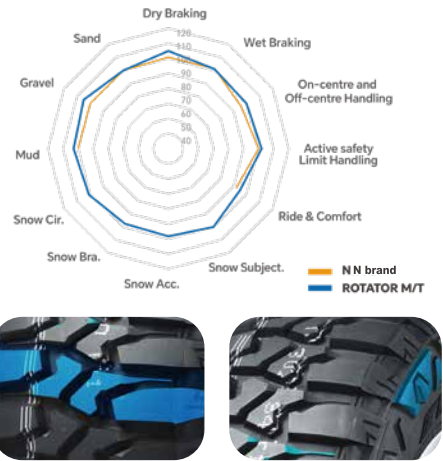

Good cut & chip resistance in mud-terrain

- Slanted biting edges prevent stone from sticking at the bottom of grooves
- The high strength construction and innovative tread formula improve tire robustness in the rugged terrain with gravel
- Buttress design from extended shoulder and high strength cord ply protect sidewall from puncture on rugged road surface

Great mud clearance capabilities with maximized off-road traction

- Patented continuous groove design and optimized void-to-fill ratio ensure sufficient mud clearance capability for higher traction



ROTATOR M/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	LT215/75R15	6PR	100/97	Q	6J	D 730 S 800	D 1610 S 1765	350	50
	LT235/75R15	6PR	104/101	Q	61/2J	D 825 S 900	D 1820 S 1985	350	50
	30X9.50R15LT	6PR	104	Q	71/2J	900	1985	350	50
	31*10.50R15LT	6PR	109	Q	81/2J	1030	2270	350	50
	33*12.50R15LT	6PR	108	Q	10J	1000	2205	250	35
16	LT225/75R16	8PR	110/107	Q	6J	D 975 S 1060	D 2150 S 2335	450	65
	LT235/85R16 OWL	10PR	120/116	S	61/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/70R16	6PR	110/107	Q	8J	D 975 S 1060	D 2150 S 2335	350	50
	LT265/75R16	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65
	LT315/75R16	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65
17	LT235/80R17	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT305/70R17	8PR	119/116	Q	9J	D 1250 S 1360	D 2755 S 3000	350	50
	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	35X12.50R17LT	10PR	121	Q	10J	1450	3195	450	65
18	37X13.50R17LT	10PR	121	Q	10J	1450	3195	450	65
	LT275/70R18	10PR	125/122	Q	8J	D 1500 S 1650	D 3305 S 3640	550	80
	33X12.50R18LT	10PR	118	Q	10J	1320	2910	450	65
	33X12.50R18LT	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT	10PR	123	Q	10J	1550	3415	450	65
	LT275/55R20	10PR	120/117	Q	81/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT285/55R20	10PR	122/119	Q	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R20	10PR	127/124	Q	81/2J	D 1600 S 1750	D 3525 S 3860	550	80
	LT305/55R20	10PR	121/118	Q	91/2J	D 1320 S 1450	D 2910 S 3195	450	65
	33X12.50R20LT	10PR	114	Q	10J	1180	2600	450	65
	33X12.50R20LT	12PR	119	Q	10J	1360	3000	550	80
	35X12.50R20LT	10PR	121	Q	10J	1450	3195	450	65
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	37X13.50R20LT	10PR	127	Q	11J	1750	3860	450	65
22	37X13.50R20LT	12PR	128	Q	11J	1800	3970	550	80
	33X12.50R22LT	10PR	109	Q	10J	1030	2270	450	65
	33X12.50R22LT	12PR	114	Q	10J	1180	2600	550	80
	35X12.50R22LT	10PR	117	Q	10J	1285	2835	450	65
	35X12.50R22LT	12PR	121	Q	10J	1450	3195	550	80
	37X13.50R22LT	10PR	123	Q	11J	1550	3415	450	65
24	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
	37X13.50R24LT	10PR	120	Q	11J	1400	3085	450	65
26	37X13.50R24LT	12PR	124	Q	11J	1600	3525	550	80
	37X13.50R26LT	10PR	114	Q	11J	1180	2600	450	65