




TRUCK & BUS TIRES TECHNICAL CATALOGUE

2025 LEAO TIRE

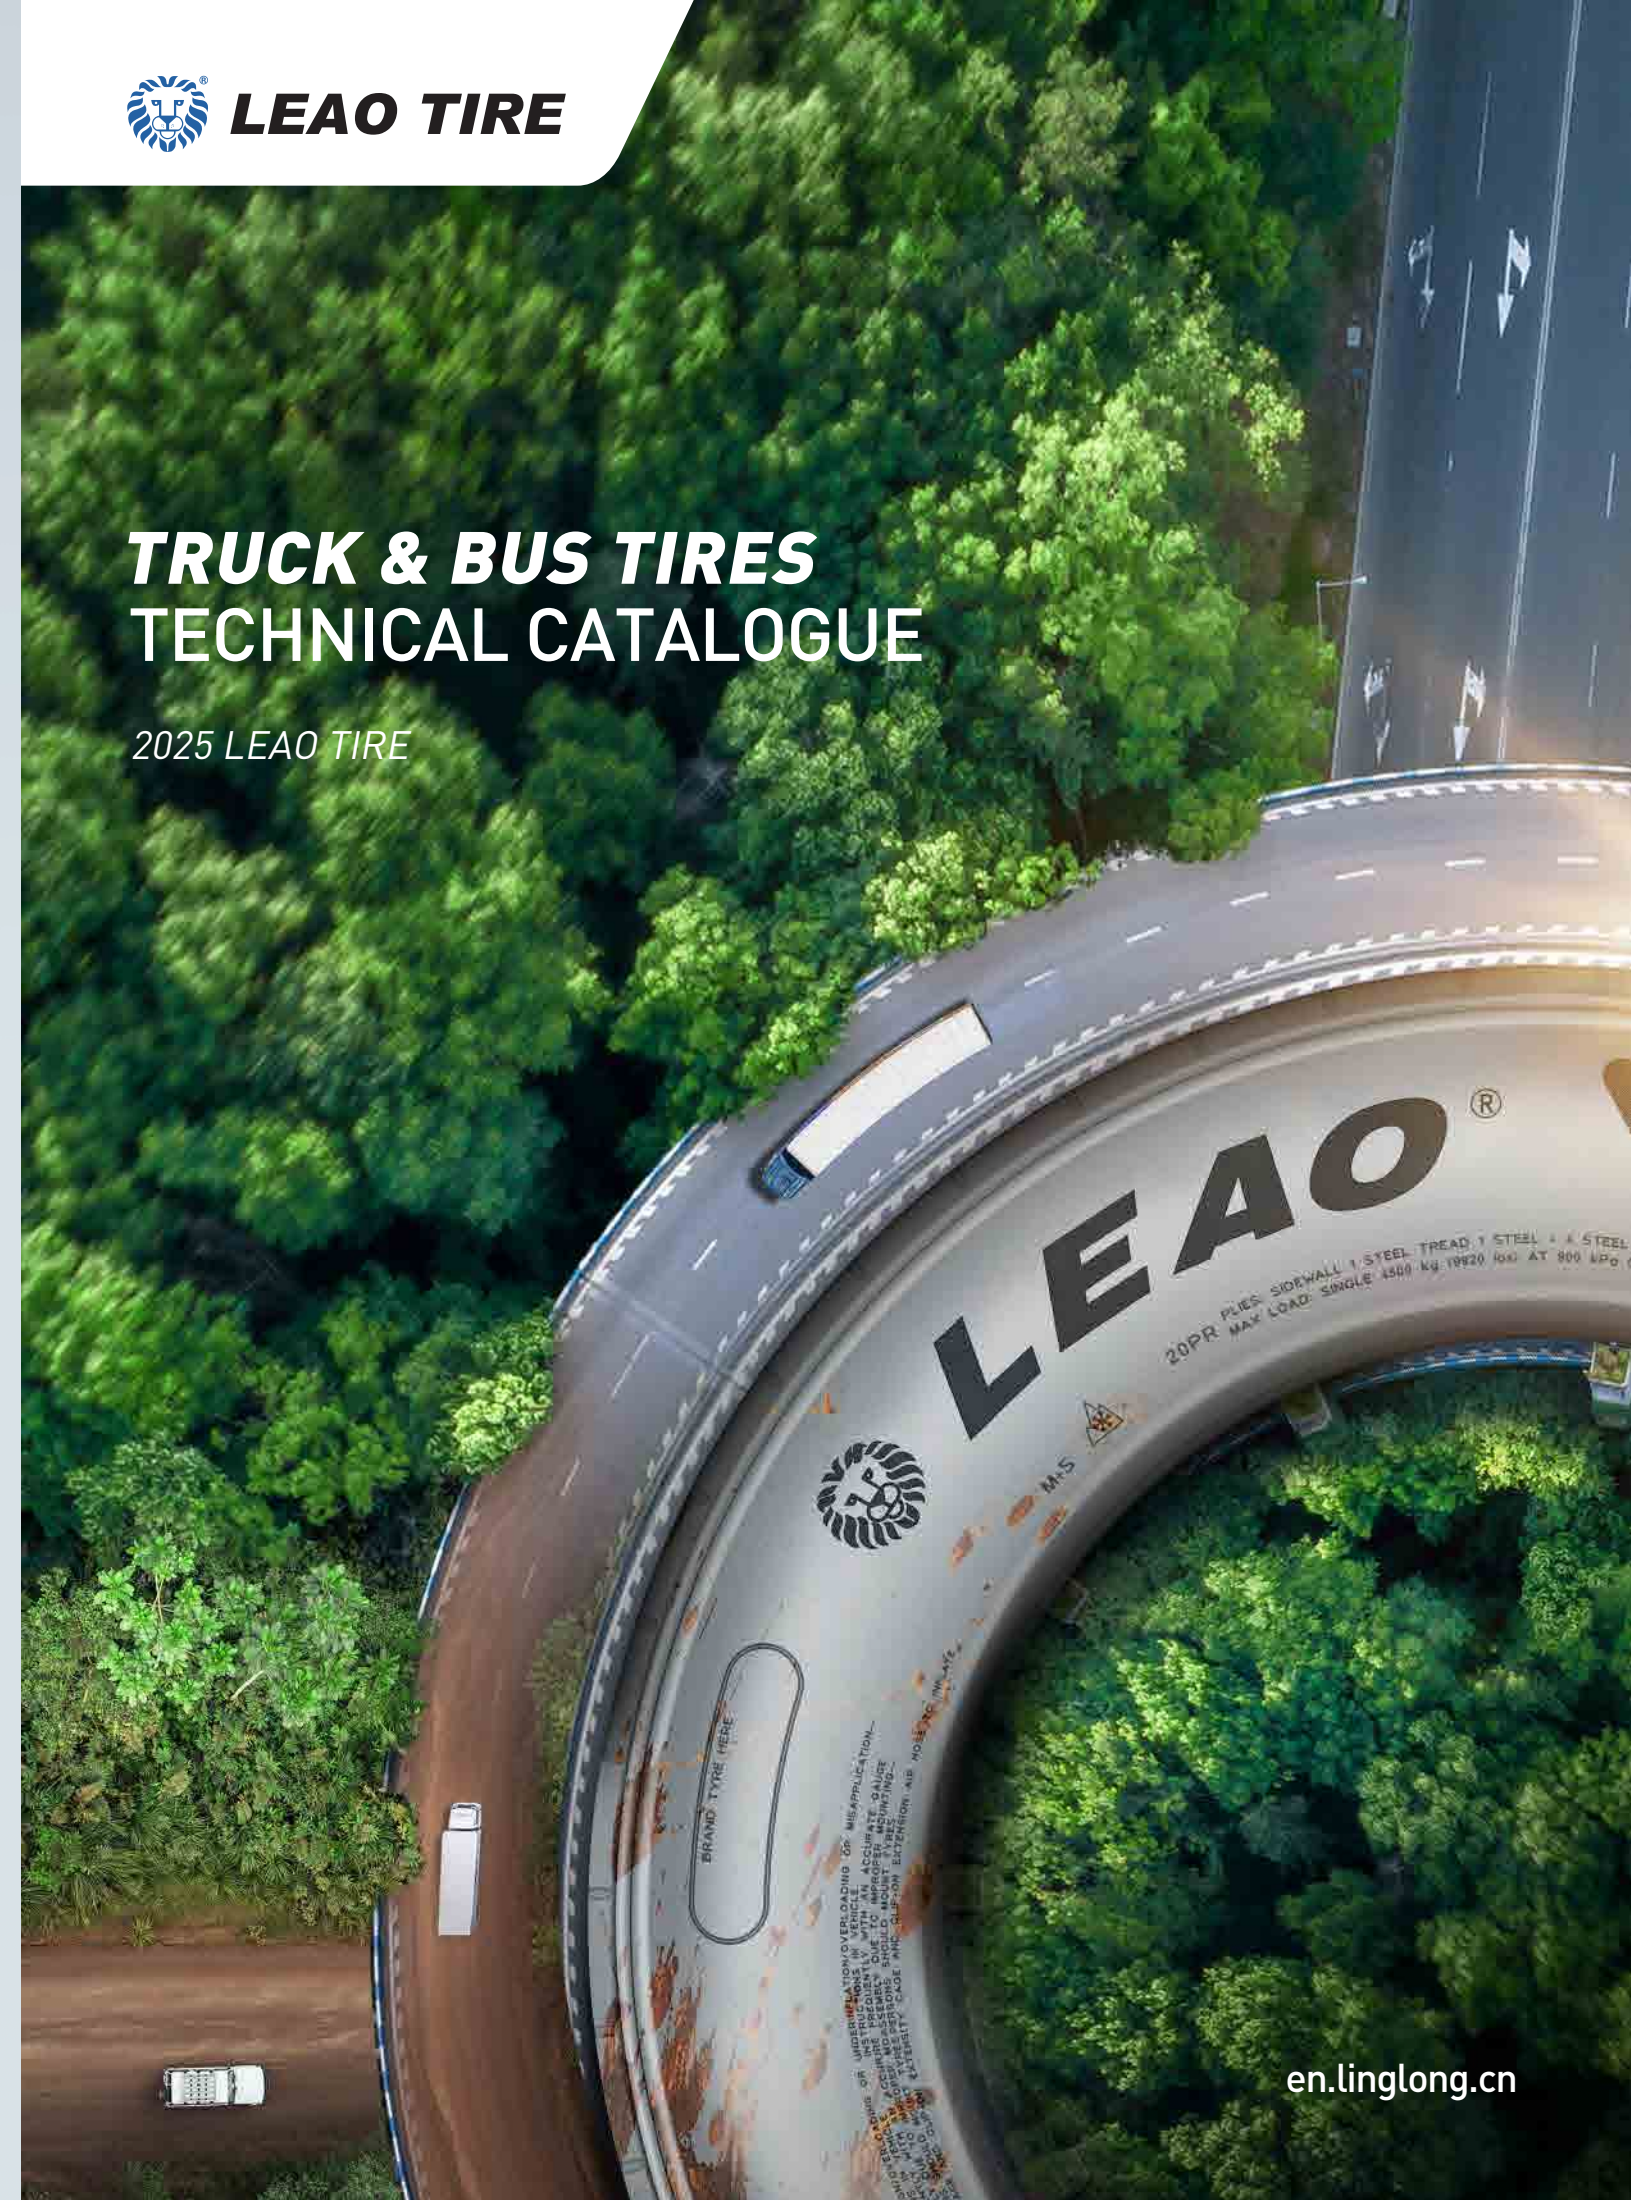

COMPANY INTRODUCTION

LEAO TIRE

R203-S

R203-D

L202-S



Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales.

Founded in 1975, the company has seven R&D centers, seven manufacturing bases across the world currently and over 17,783 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets.

Including **LINGLONG**, **ATLAS**, **LEAO** and **EVOLUXX** etc. Linglong Tire had successful access to the A share market on July 6, 2016.



In the future, the company will fully implement its global layout, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

en.linglong.cn

BRAND VALUE

It strengthens the retail network construction, with nearly

200,000

marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers.

Linglong's brand value reached

98.137

Billion RMB in 2024.

Linglong has sponsored over

100

sports events and teams worldwide


Abundant sports marketing sponsorship

such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



GLOBAL LAYOUT


Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern.

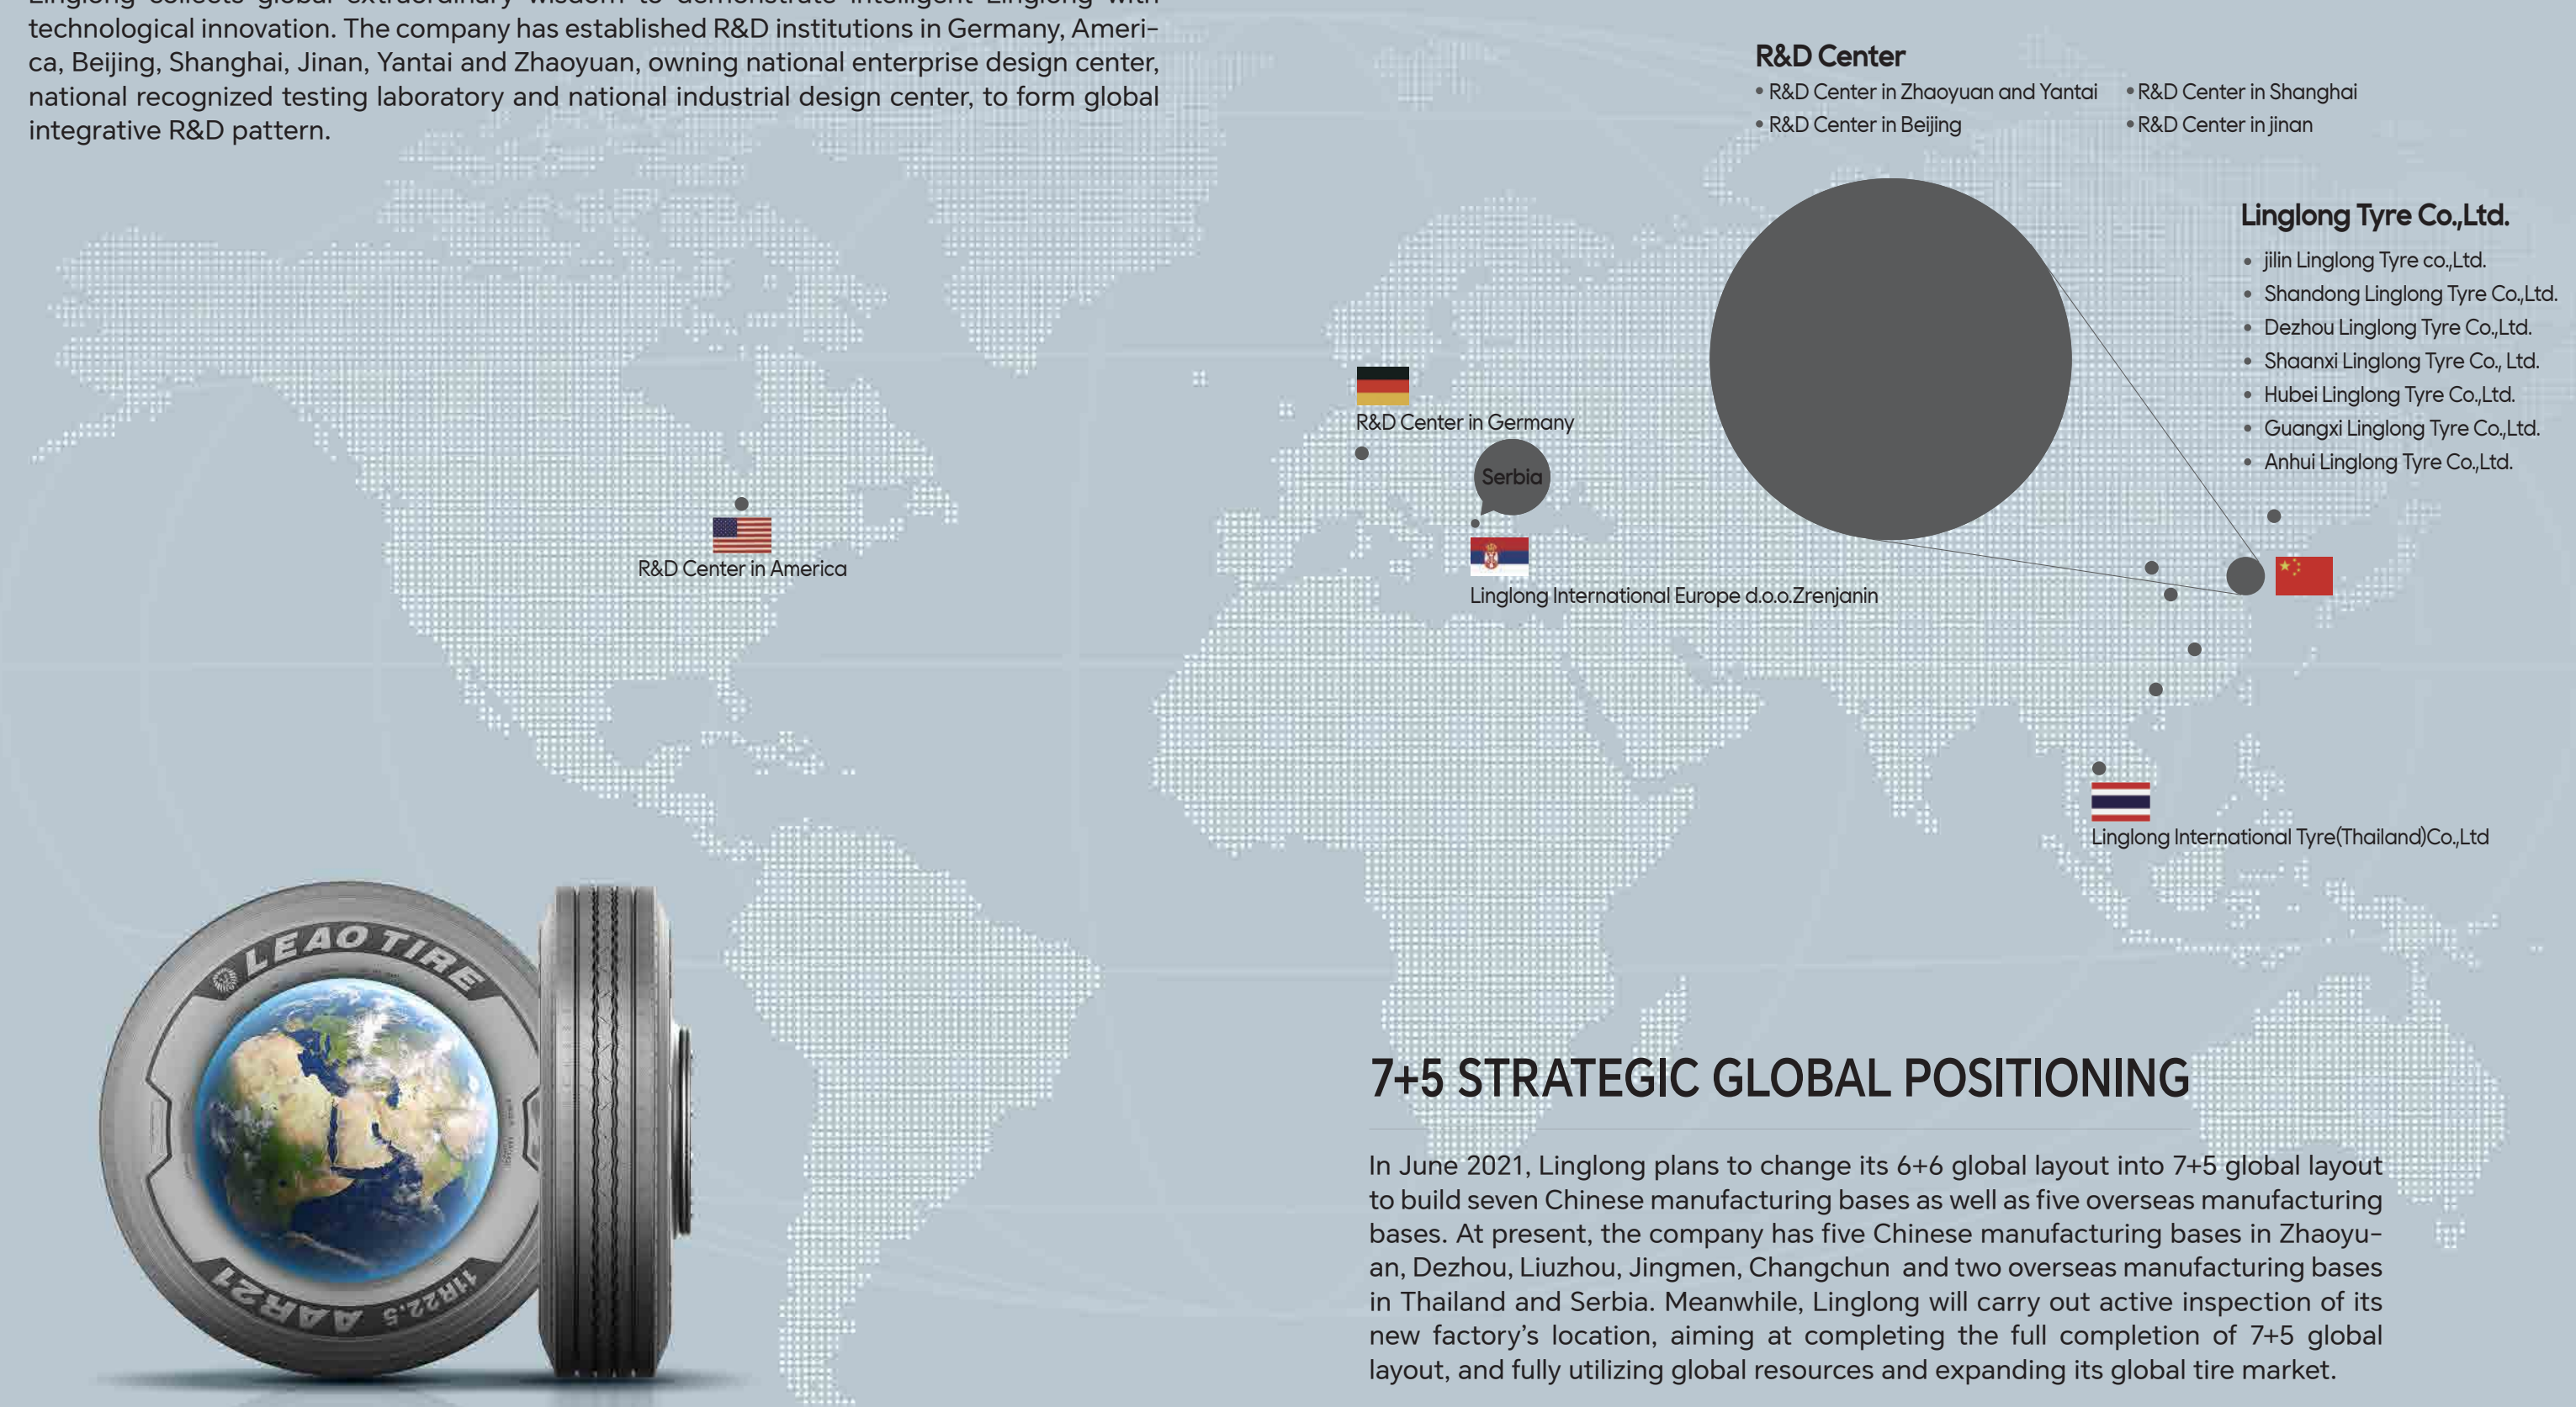

7+5 STRATEGIC GLOBAL POSITIONING

In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia. Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.

SOCT--STRESS OPTIMIZATION CONTROL TECHNOLOGY

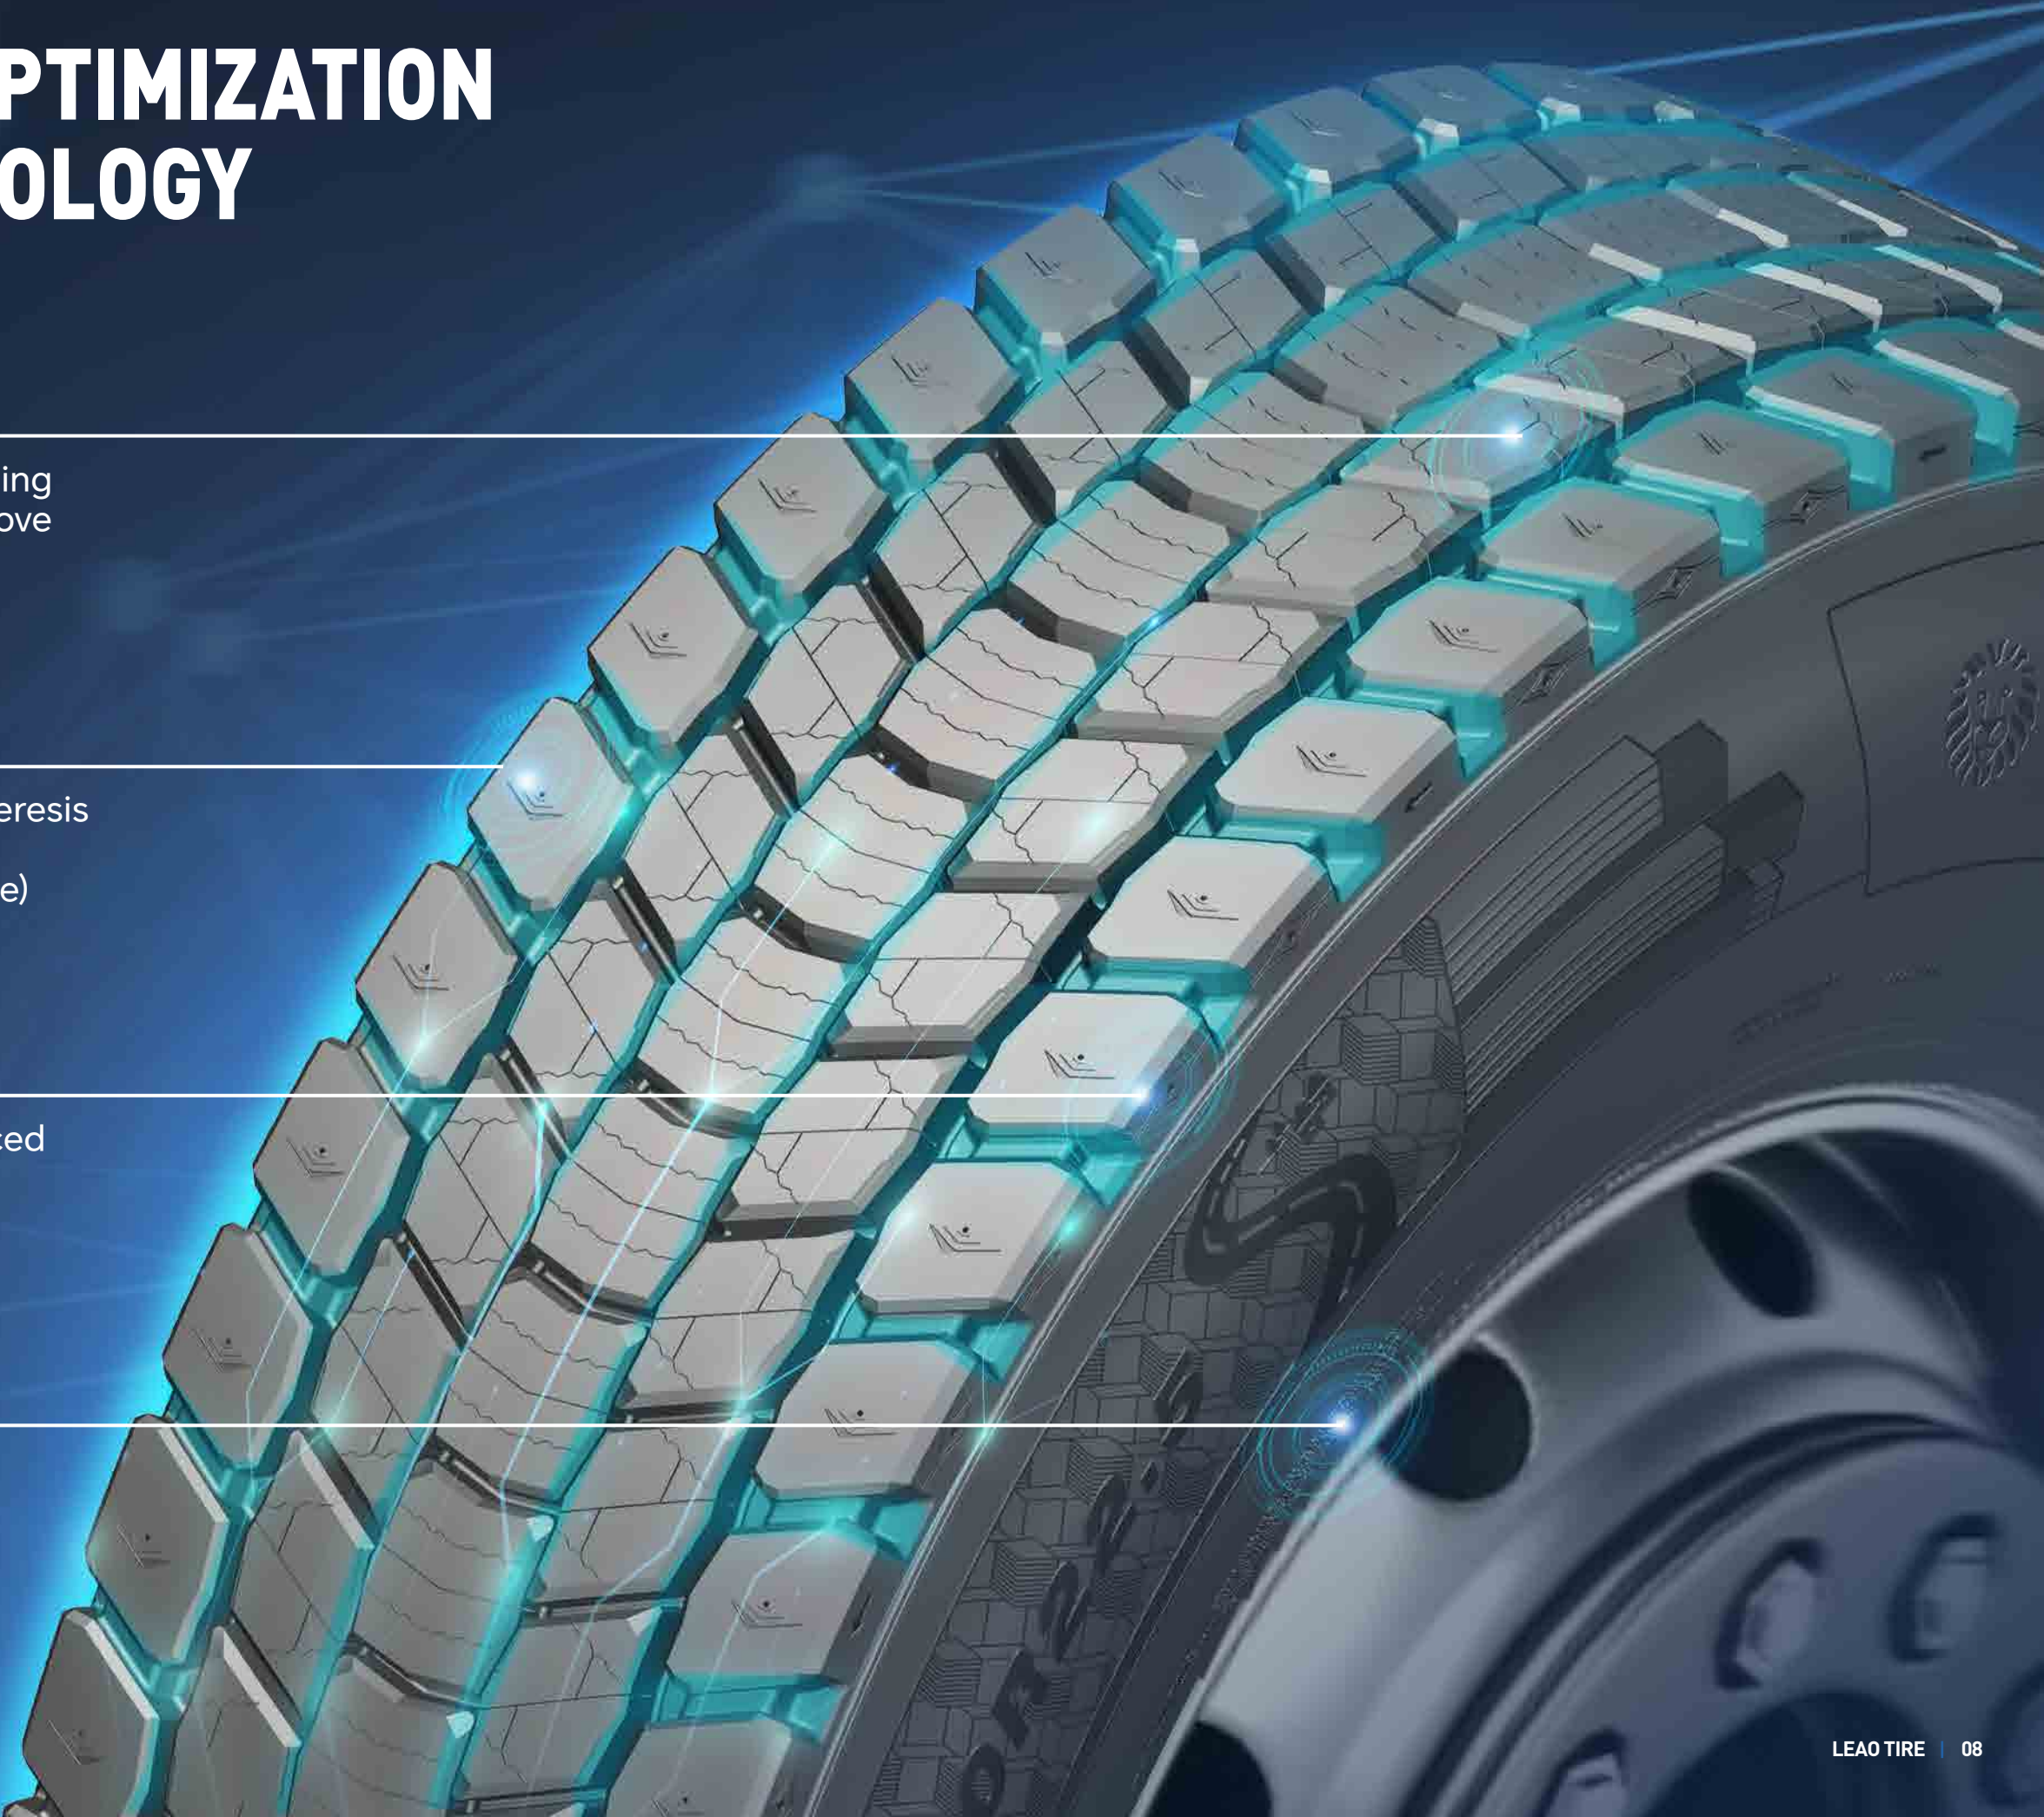

New structure

Four belt structure to optimized grounding pressure distribution.wear and anti-groove crack upgrade

New Compound

Using a new type of nanoscale low hysteresis loss composite material
(Ensure wear and lower rolling resistance)

New cord material

UT ultra-high strength wire and reinforced structure
(to ensure safety and service life)

New profile and pattern

Account rolling resistance,wet grip and noise performance



LEAO TIRE




ADL11
RADIAL TRUCK TIRE
Suitable for drive axle of trucks.

P11



ATL11
RADIAL TRUCK TIRE
Suitable for trailer axle of trucks.

P13



LONG HAUL

REGIONAL


LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER

ADL11

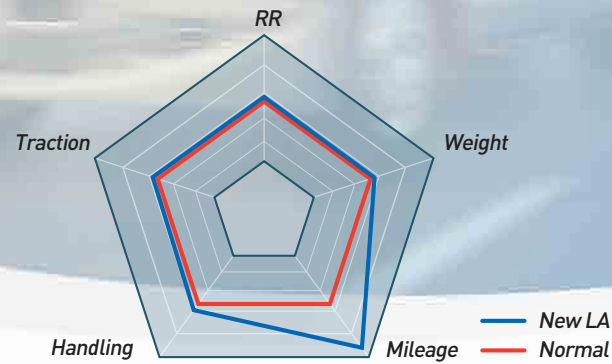

TRACTION WEAR-RESISTANT




DRIVE

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.24	11.54	26
11R22.5	146/143L	16	H	6005	120	6610	120	41.53	11.06	26
11R24.5	149/146L	16	H	6610	120	7160	120	43.50	11.06	26

RADIAL TRUCK TIRE

ORIGIN: THAILAND

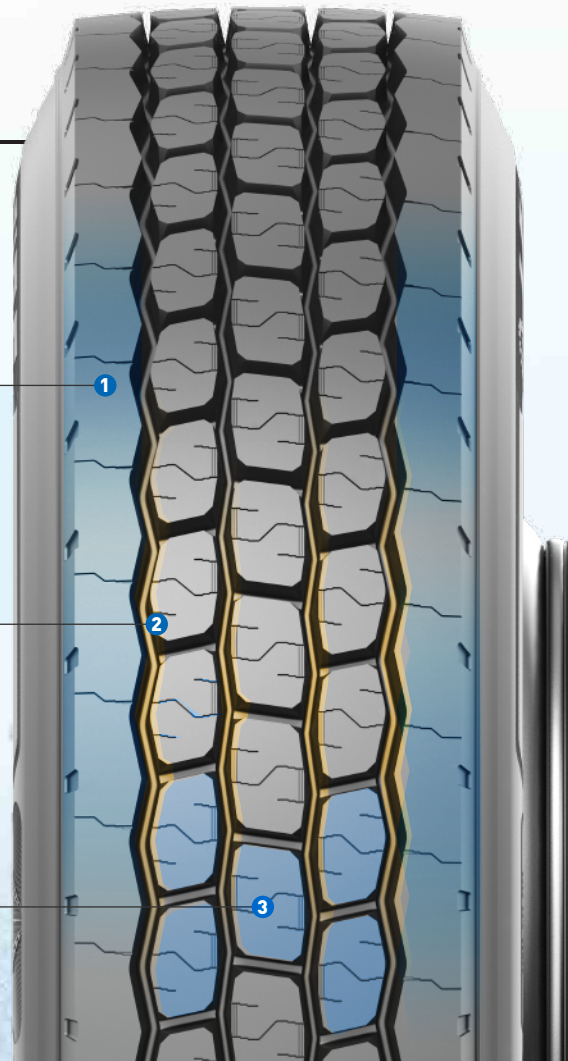


SELLING POINTS OF TIRE PRODUCTS

- 1 Closed shoulder promoted uniform wear and improved rolling resistance.
- 2 Z-Zag groove provides good traction performance.
- 3 Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.



ATL11

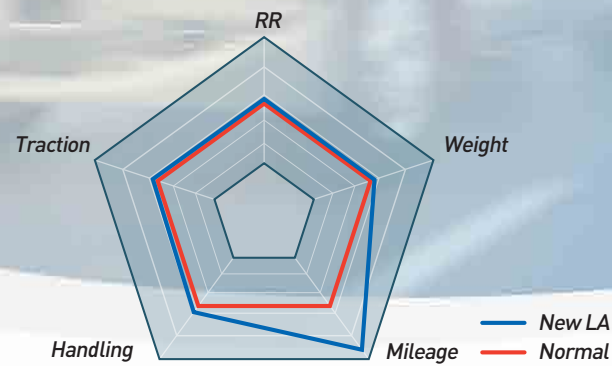


RADIAL TRUCK TIRE

ORIGIN: THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Closed shoulder promoted uniform wear and improved rolling resistance.
- 2 Micro sipes on groove edges resists abnormal or "river wear".
- 3 Decoupling groove helps resist uneven shoulder wear.

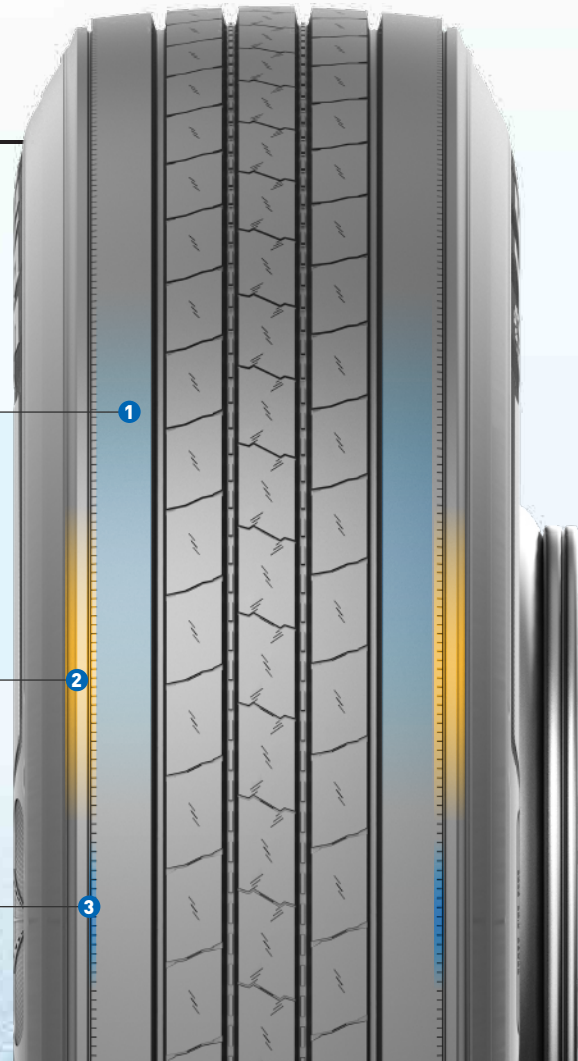

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.41	11.42	12
11R22.5	146/143L	16	H	6005	120	6610	120	40.94	11.10	12
11R24.5	149/146L	16	H	6610	120	7160	120	42.91	11.10	12

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



ETS100



Suitable for steer axle of trucks running with high speed on highway.

- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	13.0	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.0	ETRTO
	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	12.5	ETRTO
	315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	12.5	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
	315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO

ETD100



Suitable for drive axle of trucks running with high speed on highway.

- Low rolling resistance reduces fuel consumption.
- Lasting grip and stability by hidden groove design with M+S and 3PMSF marking.
- New pattern design improves mileage for long distance transportation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	16.0	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	16.5	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.0	ETRTO

ETS200



Suitable for steer axle of trucks running with high speed on highway.

- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	12.5	ETRTO
	255/70R22.5	16	140/137	M	7.50	2300	800	2500	800	930	255	12.5	ETRTO
	255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	12.5	GB/TRA
	275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	12.5	ETRTO
	275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	12.5	ETRTO
	275/80R22.5	16	147/144	M	8.25	2800	830	3075	830	1012	276	12.5	GB
	275/80R22.5	16	145/143	M	8.25	2725	750	2900	750	1012	276	12.5	ETRTO
	275/80R22.5	16	146/143	M	8.25	2725	830	3000	830	1012	276	12.5	TRA
	275/80R22.5	18	149/146	M	8.25	3000	850	3250	850	1012	276	12.5	ETRTO
	275/80R22.5	18	149/146	M	8.25	3000	900	3250	900	1012	276	12.5	GB
	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	15.5	ETRTO
	295/60R22.5	16	148/145	L	9.00	2900	830	3150	830	926	292	15.5	GB
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	12.5	ETRTO
	295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	12.5	GB
	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	12.5	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	12.5	GB
	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	15.0	ETRTO
	315/60R22.5	18	151/148	K	9.75	3150	830	3450	830	950	313	15.0	GB
	315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	15.0	ETRTO
	315/60R22.5	20	153/150	K	9.75	3350	900	3650	900	950	313	15.0	GB
	315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	12.5	GB/TRA
	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	12.5	ETRTO
	315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	12.5	GB/TRA
	315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	12.5	ETRTO



LEAO TIRE

ETT100



Suitable for trailer axle of trucks running with high speed on highway.

- Low rolling resistance reduces fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/55R19.5	18	156	J	12.25	--	--	4000	900	919	386	12.5	ETRTO
	385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	12.0	ETRTO
	385/55R22.5	20	160[158]	K(L)	12.25	--	--	4500	900	996	386	12.0	ETRTO
	385/65R22.5	20	160[158]	K(L)	11.75	--	--	4500	900	1072	389	13.5	ETRTO
	385/65R22.5	24	164[158]	K(L)	11.75	--	--	5000	900	1072	389	13.5	ETRTO
	425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	14.5	TRA
	425/65R22.5	20	165	K	12.25	--	--	5150	825	1124	422	14.5	ETRTO
	435/50R19.5	18	156	J	14.00	--	--	4000	850	931	438	12.5	ETRTO
	435/50R19.5	20	160	J	14.00	--	--	4500	900	931	438	12.5	ETRTO
	445/45R19.5	18	156	J	15.00	--	--	4000	900	895	446	12.5	ETRTO
	445/45R19.5	20	160	J	15.00	--	--	4500	900	895	446	12.5	ETRTO

KTD10



Suitable for the drive axle of the trucks running on highway.

- Low rolling resistance reduces fuel consumption.
- Closed shoulder to fight irregular wear.
- New pattern design improves mileage for long-distance transportation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	23.8	TRA
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	23.8	TRA
	11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	23.8	TRA
	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	23.8	TRA
	285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.2	TRA
	285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.2	TRA
	295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.2	TRA
	295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.2	TRA

AFE891



- Maximize tread volume for long original life and lower tread wear cost per mile.

- Equalizer ribs absorb irregular wear, promoting uniform rib wear and higher removal mileage.

- Micro sipes protest against irregular wear.

- Strong carcass materials.

- Help to promote tire durability and provide tire retreadability.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	16.5	TRA
	295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	16.5	TRA

ADE892



Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.

- Long life, low rolling resistance.

- Optimize the footprint for even wear and long tread life.

- Strong carcass materials.

- Help to promote tire durability and provide tire retreadability.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
	11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	22.0	TRA
	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	22.0	TRA
	285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.0	TRA
	285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.0	TRA
	295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.0	TRA
	295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.0	TRA



LEAO TIRE



LLF16



Suitable for the steer axle of the trucks running on highway.

- Good handling.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA



LLF16e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
★	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
★	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
★	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
★	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
★	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
★	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
★	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA

★: SmartWay



LLD37



Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	22.0	TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	22.0	TRA
	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA
	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA



LLD37e+



Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	17.5	TRA
★	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	17.5	TRA
★	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
★	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
★	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
★	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA
★	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
★	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA

★: SmartWay

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE



ATE821



- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	9.5	TRA
★	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	9.5	TRA
★	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	9.5	TRA
★	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	9.5	TRA
★	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	9.5	TRA
★	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	9.5	TRA
★	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
★	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA

★: SmartWay



ADL817




- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	20.0	TRA
★	445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	20.0	TRA
★	445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	20.0	ETRTO
★	445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	20.0	ETRTO

★: SmartWay



ATL811



Suitable for the trailer axle of trucks running on highway.


- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	10.5	TRA
★	445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	10.5	TRA
★	445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	10.5	ETRTO
★	445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	10.5	ETRTO

★: SmartWay



LLD76




Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Construction optimized for long service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1058	279	20.0	TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1058	279	20.0	TRA
	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1109	279	20.0	TRA
	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1109	279	20.0	TRA



LLD01



Suitable for the drive axle of the trucks running on highway.

- Good grip and high-speed performance.
- Low fuel consumption.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



T820



Suitable for the trailer axle of the trucks running on highway.

- Low fuel consumption.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	12.0	ETRT0
	385/55R19.5	18	156	J	12.25	---	---	4000	900	919	386	12.5	ETRT0
	435/50R19.5	18	156	J	14.00	---	---	4000	850	931	438	12.5	ETRT0
	435/50R19.5	20	160	J	14.00	---	---	4500	900	931	438	12.5	ETRT0
	445/45R19.5	18	156	J	15.00	---	---	4000	900	895	446	15.5	ETRT0
	445/45R19.5	20	160	J	15.00	---	---	4500	900	895	446	15.5	ETRT0



T830




Suitable for the trailer axle of the trucks running on highway.

- Low fuel consumption.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	15.5	ETRTO
	385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	15.5	ETRTO



T810e+



- Low fuel consumption.
- Certified by U.S.A SmartWay.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10	TRA
★	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10	TRA
★	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
★	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
★	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10	TRA
★	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10	TRA

★: SmartWay



T810



Suitable for the trailer axle of the trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.75	TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.75	TRA
	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
	255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	10.75	TRA
	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	10.75	TRA
	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	10.75	TRA
	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.75	TRA
	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.75	TRA



LEAO TIRE



REGIONAL



ADR21

RADIAL TRUCK TIRE
Suitable for drive axle of trucks.

P27



ATR21

RADIAL TRUCK TIRE
Suitable for trailer axle of trucks.

P29



AAR21

RADIAL TRUCK TIRE
Suitable for All position axle of trucks.


P31



L202-D

RADIAL TRUCK TIRE
Suitable for drive axle of trucks.

P33



L202-S

RADIAL TRUCK TIRE
Suitable for steer axle of trucks.

P35



R203-D

RADIAL TRUCK TIRE
Suitable for drive axle of trucks.

P37



R203-S

RADIAL TRUCK TIRE
Suitable for steer axle of trucks.

P39



R203-T

RADIAL TRUCK TIRE
Suitable for trailer axle of trucks.

P41



LONG HAUL

REGIONAL


LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER

ADR21

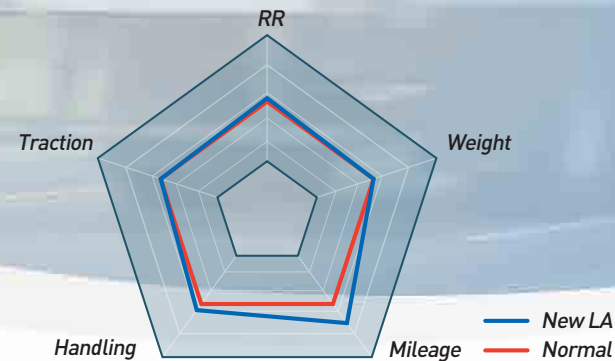

RADIAL TRUCK TIRE




ORIGIN: : THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Open shoulder offers good traction and help with heat dissipation while durable tread compound and narrow groove between shoulder and next rid designed for excellent wear resistance on shoulder.
- 2 Aggressive pattern and lateral grooves provides tire excellent drive and braking performance.
- 3 Two main grooves helps to provide good handling performance.



IMMOBILIZE TRACTIVE FORCE




DRIVE

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.50	11.54	30
11R22.5	146/143L	16	H	6005	120	6610	120	41.78	11.06	30
11R24.5	149/146L	16	H	6610	120	7160	120	43.75	11.06	30



ATR21

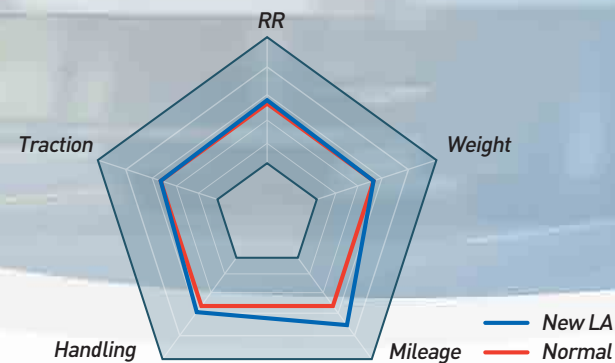

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.72	11.42	17
11R22.5	146/143L	16	H	6005	120	6610	120	41.26	11.10	17
11R24.5	149/146L	16	H	6610	120	7160	120	43.23	11.10	17


RADIAL TRUCK TIRE




ORIGIN: : THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Wide, continuous shoulder ribs fight turning side forces and resist tearing.
- 2 Micro sipes on groove edges resists abnormal or “river wear”.
- 3 Deep tread depth for high-Scrub trailer service.

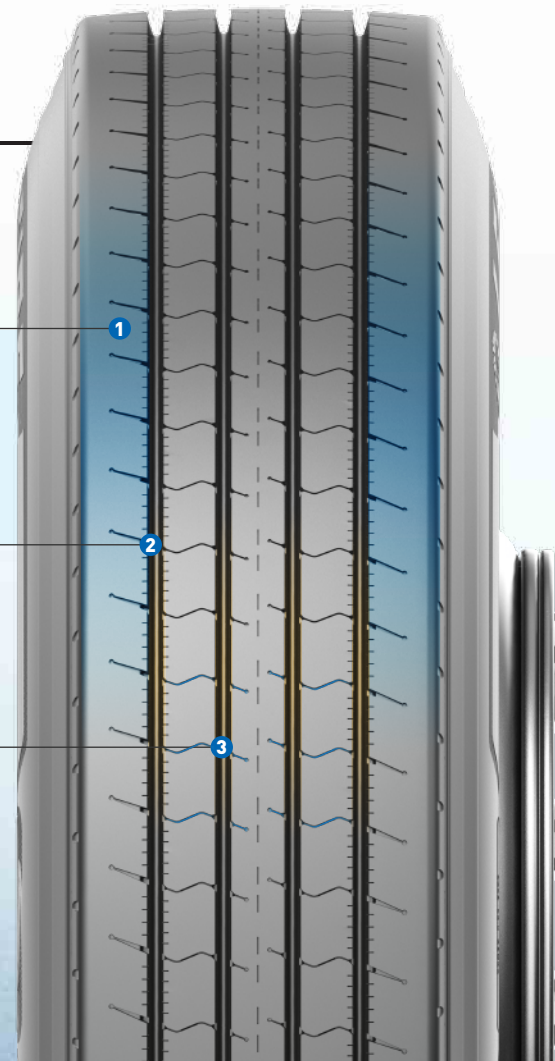

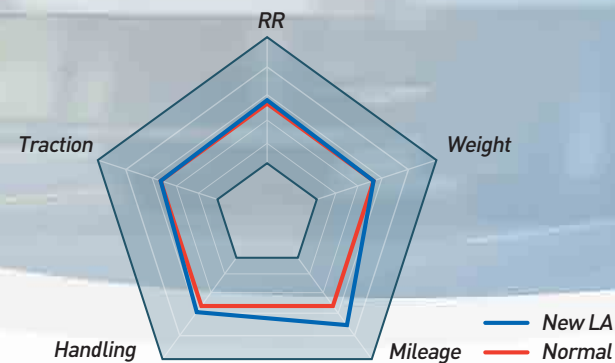


RADIAL TRUCK TIRE



ORIGIN: : THAILAND

SELLING POINTS OF TIRE PRODUCTS


- 1 Tough tread compound and solid shoulder ribs to resist maneuvering scrub.
- 2 A combination of 4 way and straight groove provide outstanding traction and drainage performance.
- 3 Center rib diagonal sipes to promote even wear and grip.

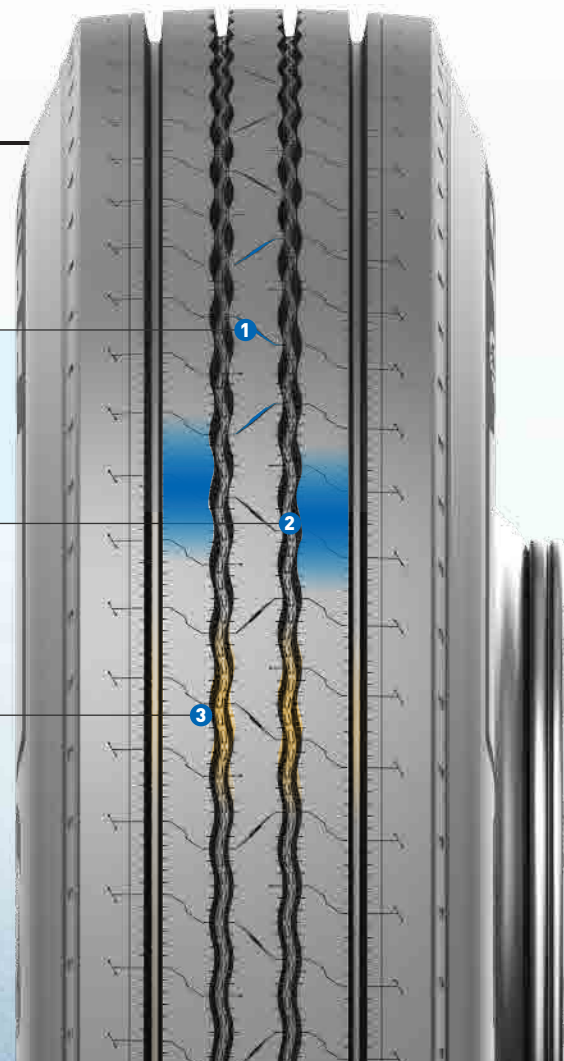

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
11R22.5	146/143L	16	H	6005	120	6610	120	41.21	11.06	21
11R24.5	149/146L	16	H	6610	120	7160	120	43.18	11.06	21
215/75R17.5	135/133J	16	H	4540	123	4805	123	30.24	8.35	16
225/70R19.5	128/126L	14	G	3750	110	3970	110	31.83	8.94	16
235/75R17.5	143/141J	18	J	5675	127	6005	127	31.34	9.29	17
245/70R19.5	135/133L	16	H	4540	120	4805	120	32.95	9.61	17
255/70R22.5	140/137M	16	H	5070	120	5510	120	36.55	10.16	17
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.93	11.54	21



L202-D

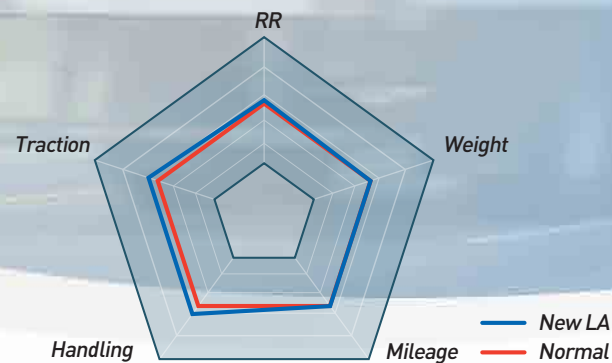

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	15.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	13.5	ETRTO
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	13.5	ETRTO

RADIAL TRUCK TIRE


ORIGIN: EUROPE

SELLING POINTS OF TIRE PRODUCTS

- Good braking and grip on the road.
- Typical block pattern design suitable for the drive axle of trucks.



L202-S

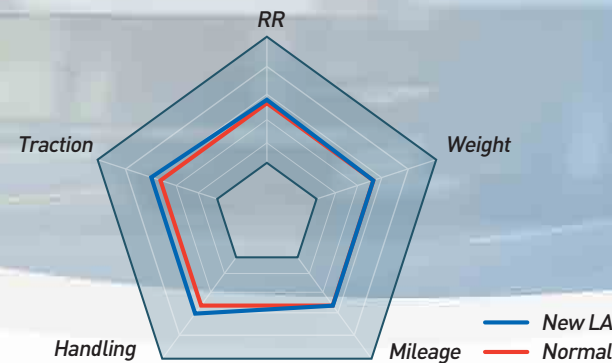


RADIAL TRUCK TIRE

ORIGIN: EUROPE


SELLING POINTS OF TIRE PRODUCTS

- Suitable for medium trucks running on the high-grade road.
- Stone rejection design protect groove bottom from stone puncture.
- Safe driving and braking thanks to 4 Z-shaped longitudinal grooves.

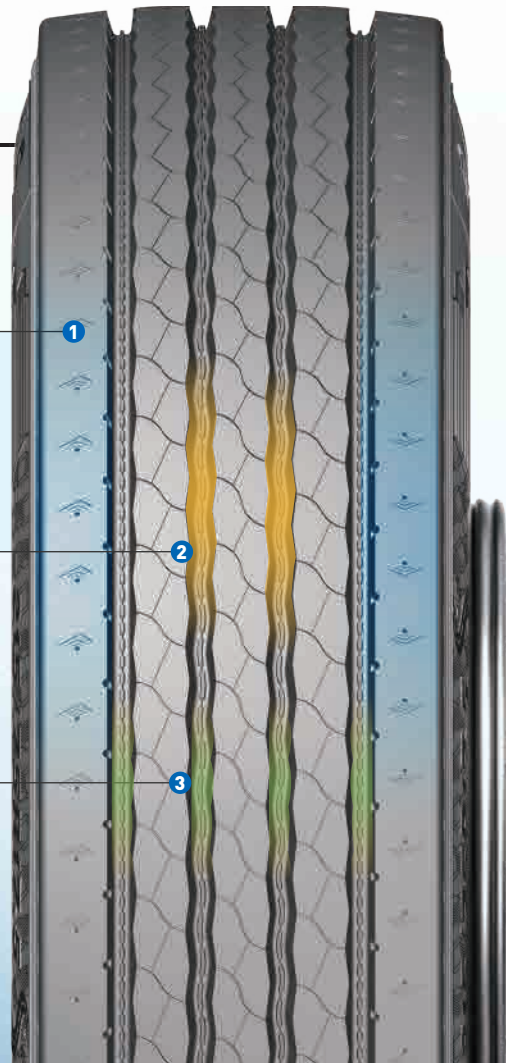

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R17.5	16	140/138	M	7.50	2360	800	2500	800	817	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	12.0	ETRTO
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	12.0	ETRTO

R203-D

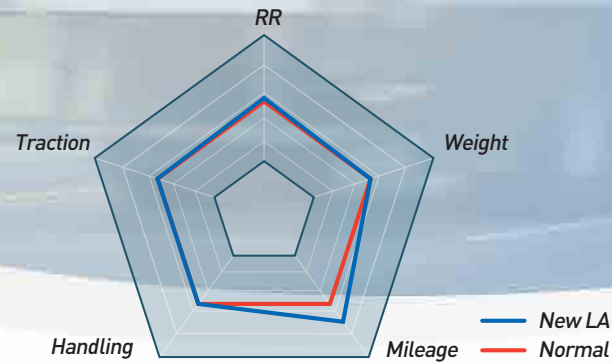

RADIAL TRUCK TIRE



ORIGIN: : EUROPE

SELLING POINTS OF TIRE PRODUCTS

- 1 New sipes Improve grip and resistance to tread tearing in severe conditions of use.
- 2 Directional groove shapes provides greater traction on slippery road surfaces.




DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	14.7	ETRTO
295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	16.7	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.7	ETRTO
315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	18.0	ETRTO



R203-S

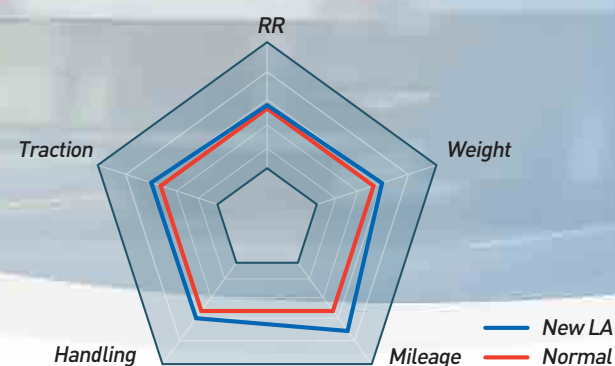

RADIAL TRUCK TIRE



ORIGIN: EUROPE

SELLING POINTS OF TIRE PRODUCTS


- 1 Blades variable depth for optimum rib flexion, uniform wear and wet braking performance.
- 2 Slightly directional design to provide grip in forward & braking direction.
- 3 Groove stone ejectors help prevent stone trapping and drilling to enhance casing toughness and retreadability.



LOW ROLLING



Fuel Economy




STEER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	12.5	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	15.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	13.0	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	14.5	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	14.5	ETRTO



R203-T

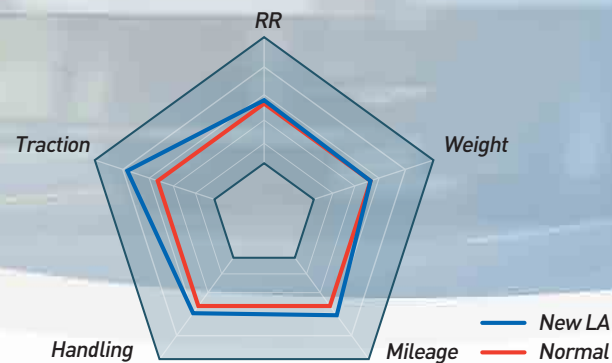


RADIAL TRUCK TIRE



ORIGIN: EUROPE

SELLING POINTS OF TIRE PRODUCTS


- Center ribs stiffeners with hidden grooves for wear and cornering performance.
- Edge blades to prevent groove edge river wear.
- Blades variable depth for optimum rib flexion, uniform wear and wet braking performance.

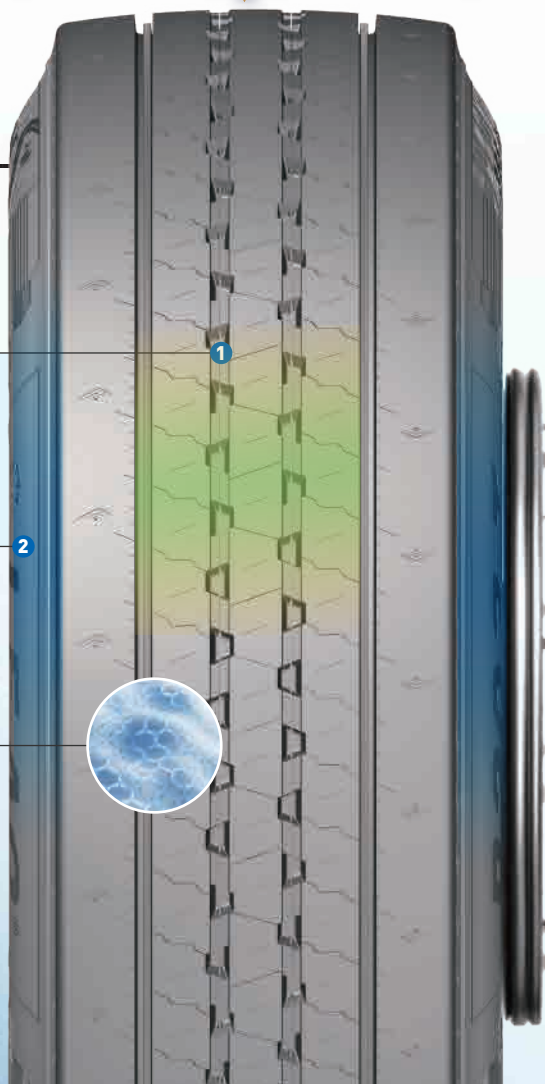

LOW ROLLING



GOOD WET GRIP



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R22.5	20	160(158)	K(L)	12.25	—	—	4500	900	996	386	15.5	ETRTO
385/65R22.5	20	164(158)	K(L)	11.75	—	—	5000	900	1072	389	15.5	ETRTO
425/65R22.5	20	165	K	12.25	—	—	5150	825	1124	422	15.0	ETRTO

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



ADL831



- Typical block pattern design makes good grip performance.
- High wear resistance and long life.
- Retreadability.
- Low eccentric wear.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	22.0	ETRTO
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	23.0	ETRTO
	12R22.5	18	152/149	M	9.00	3250	930	3550	930	1085	300	23.0	GB
	285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	19.0	ETRTO
	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	19.0	ETRTO
	285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	19.0	ETRTO
	295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	23.0	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	23.0	ETRTO
	315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO

KTS300



- Suitable for the steer axle of trucks running under a wide range of use, from highway to light unpaved road.
- Optimization of the shoulder block improves resistance to shoulder damage.
 - Lasting grip and stability with stone rejection design.
 - High wear resistance.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.5	TRA
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	14.0	ETRTO
	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.5	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.5	ETRTO
	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	12.5	ETRTO
	315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	12.5	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
	315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	15.5	TRA
	315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
	385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	13.5	ETRTO
	385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
	385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
	385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO



LEAO TIRE

KTD300



Suitable for the drive axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S and 3PMSF marking.
- High wear resistance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
❄️	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	18.0	ETRTO
❄️	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	20.5	GB
❄️	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.5	ETRTO
❄️	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
❄️	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
❄️	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
❄️	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO

ATL863




- Typical combined pattern design offers optimal trailer performance.
- Low rolling resistance.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
	385/55R22.5	20	160(158)	J(L)	12.25	---	---	4500	900	996	386	16.5	ETRTO
	385/65R22.5	18	158	L	11.75	---	---	4250	850	1072	389	16.5	ETRTO
	385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO
	385/65R22.5	24	164	J	11.75	---	---	5000	900	1072	389	16.5	ETRTO
	385/65R22.5	24	164(158)	K(L)	11.75	---	---	5000	900	1072	389	16.5	ETRTO
	425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
	425/65R22.5	20	165	K	12.25	---	---	5150	825	1124	422	17.5	ETRTO
	445/65R22.5	20	169	J	13.00	---	---	5800	900	1150	444	18.0	ETRTO



D930




- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11.00R22	16	152/149	K	8.00	3250	830	3550	830	1135	293	20.0	TRA
	11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	20.0	GB
	305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	19.5	ETRTO
	305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	19.5	ETRTO



D935




- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	18.5	TRA
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.5	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB



D900



- New technology for tire to reduce the weight.
- Low eccentric wear.
- Low fuel consumption.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB



LEAO TIRE



KLS200



- Long life.
- Retreadability.
- Low eccentric wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
	265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
	265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	13.5	ETRTO
	285/70R19.5	20	150/148	J	8.25	3150	900	3350	900	895	283	13.5	ETRTO
	305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	12.0	TRA
	305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	12.0	TRA
	305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	12.0	ETRTO



KLD200



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	15.5	ETRTO
	265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
	305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	13.5	TRA
	305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	13.5	TRA
	305/70R19.5	18	148/145	M	9.00(8.25)	2900	850	3150	850	923	305	13.5	ETRTO



KLT200



Suitable for medium trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	205/65R17.5	16	129/127 (132/132)	J(G)	6.00	1750	900	1850	900	711	205	12.5	ETRTO
	215/75R17.5	14	125/122	L	6.00	1500	760	1650	760	767	211	12.5	GB
	215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
	215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	12.5	GB
	215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
	235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
	245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
	245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
	245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO



KTA20



Suitable for all position of trucks using for high traction and high scrub applications.

- Wide and strong shoulder ribs increase tread life.
- Lasting grip and stability.
- High wear resistance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	15.1	TRA
★	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	15.1	TRA
★	11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	15.1	TRA
★	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	15.1	TRA
★	285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1050	283	15.1	TRA
★	285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1050	283	15.1	TRA
★	295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	15.1	TRA
★	295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	15.1	TRA

★: SmartWay

KTD23



Suitable for drive axle of trucks using for high traction and high scrub applications.

- Horizontal pattern provides tire excellent drive and braking performance.
- Shoulder pattern groove and open pattern design with good tire heat dissipation.
- Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
	225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.8	TRA
	225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.8	TRA
	245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	15.8	TRA
	245/70R19.5	16	135/133	L	7.50	2060	830	2180	830	839	248	15.8	TRA

F816e+




- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
★	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
★	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
★	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
★	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
★	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
★	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
★	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA

F816



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
	11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
	11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
	12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
	11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	14.5	ETRTO
	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
	12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	16.0	GB
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	16.0	GB
	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE



LLF56+



Suitable for all position axle of buses and trucks.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9R22.5	12	133/131	M	6.75	1950	720	2060	720	974	229	13.5	TRA
	9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	13.5	TRA
	10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	14.0	TRA
	10R22.5	14	144/142	L	7.50	2650	850	2800	850	1019	254	14.0	ETRTO
	10R22.5	16	144/142	L	7.50	2650	900	2800	900	1019	254	14.0	GB



KTD301



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.5	TRA
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.5	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1065	279	22.5	ETTRO
	11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	22.5	TRA
	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	22.5	TRA



LLA18



Suitable for the trailer axle of the trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
	385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO



LLA28



Suitable for the trailer axle of the trucks running on the multi road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
	425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO



KTD200



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S and 3PMSF marking.
- High wear resistance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



LEAO TIRE

AFL185



- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tire and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO

LLF01



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.5	ETRTO
	295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	14.5	ETRTO
	315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	14.5	ETRTO
	315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO

ADL186



- Optimization of the shoulder and the proportion of pattern block in the middle.
- Classic mahjong block pattern style matching variable angle groove design and ensure a strong drive and self-cleaning.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
	295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
	315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO

AFL177



- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tire and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.5	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE



ATL812



- Long life.
- Retreadability.
- Low eccentric wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
	9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	14.5	TRA
	10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	15.0	TRA
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
	11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
	275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
	285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
	285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
	315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.0	ETRTO
	315/60R22.5	18	154/150(152/148)	L(M)	9.75	3350	900	3750	900	950	313	17.0	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	17.0	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.0	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	ETRTO



TL812H



- Long life.
- Retreadability.
- Low eccentric wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.0	
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	



LLF06



- Special design for all position of buses and steer or trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9.00R20	14	141/139	L	7.0	2430	790	2575	790	1019	259	14.0	TRA
	9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.0	GB
	10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.0	TRA
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.0	GB
	11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
	12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	TRA
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
	11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	14.5	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
	315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



LEAO TIRE

F860+



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.
- New technology for tire to reduce the weight.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.0	ETTRO
	275/80R22.5	18	149/146	M	8.25	3000	900	3250	900	1012	276	14.0	GB
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	15.0	GB

F860



- Special design for all position of buses and steer or trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB
	11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
	11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
	11.00R22	16	152/149	K	8.0	3250	830	3550	830	1135	293	15.0	TRA
	11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	15.0	GB
	12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
	305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	14.5	ETRTO
	305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	14.5	ETRTO

F820



Suitable for all position axle of buses and medium trucks.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	14.0	TRA
	255/70R22.5	16	140/137	M	7.50	2300	800	2500	800	930	255	14.0	ETRTO
	265/70R19.5	16	139/136	M	7.50	2240	830	2430	830	867	262	13.5	GB
	265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
	265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
	275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
	275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	14.5	ETRTO
	285/70R19.5	16	144/142	M	8.25	2650	800	2800	800	895	283	14.0	ETRTO
	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	14.0	ETRTO
	285/70R19.5	18	150/147	J	8.25	3075	900	3350	900	895	283	14.0	ETRTO

D905



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	17.5	ETRTO
	285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
	285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.5	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.5	GB
	315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	17.5	ETRTO



LEAO TIRE



D928



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.5	TRA
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.5	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.5	ETRTO
	11R24.5	14	146/143	L	8.25	2725	720	3000	720	1110	279	20.5	TRA
	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1110	279	20.5	TRA
	285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1056	283	20.5	TRA
	285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1056	283	20.5	TRA
	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1020	298	20.5	TRA
	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1020	298	20.5	TRA



LLF02




- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
	13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	16.5	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
	295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.5	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
	315/80R22.5	22	158/150(154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



AAL800



- Suitable for all position axle of trucks running on the multi road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.0	GB
	12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.0	ETRTO
	12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.0	ETRTO
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
	12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	16.0	GB
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	16.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	16.0	ETRTO



D915



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	17.5	ETRTO
	315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	19.5	ETRTO



ADL161



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB



LEAO TIRE

KTA303



Suitable for all position axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- HAT technology: low heat generation.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
	10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14.0	ETRTO
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	15.0	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	15.0	GB
	265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	12.5	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	14.0	GB
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	ETRTO
	385/65R22.5	20	160	K	11.75	—	—	4500	900	1072	389	16.0	ETRTO

LAL836




- Good handling and driving.
- Long life.
- Retreadability.
- Low eccentric wear.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	18.0	ETRTO
	12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	18.0	GB
	13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	18.0	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	16.0	GB
	315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	18.0	ETRTO

KTD303



Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
	265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	14.5	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
	295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO

F805



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
	305/70R22.5	16	152/148	L	9.00	3150	900	3550	900	1000	305	14.5	ETRTO
	305/70R22.5	18	154/150	K	9.00	3350	900	3750	900	1000	305	14.5	ETRTO
	315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	14.5	ETRTO



LEAO TIRE



C600



Suitable for all position axle of trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16	TRA
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16	ETRTO
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16	ETRTO

KTT306



- Low fuel consumption.
- HAT technology: low heat generation.
- Zigzag pattern design.
- New technology for tire to reduce the weight.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO

AFL827



- New technology for tire to reduce the weight.
- Low eccentric wear.
- Low fuel consumption.
- Good handling.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	13.0	GB
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	13.0	ETRTO
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
	295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.0	GB
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	13.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	13.0	ETRTO
	385/65R22.5	20	160	J	11.75	—	—	4500	900	1072	389	13.0	ETRTO
	385/65R22.5	20	160[158]	K(L)	11.75	—	—	4500	900	1072	389	13.0	ETRTO
	385/65R22.5	24	164	J	11.75	—	—	5000	900	1072	389	13.0	ETRTO

KTT307



- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO
	11R22.5	18	149/146	K	8.25	3000	930	3250	930	1050	279	14	GB
	295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	14	ETRTO

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE

KTT308



- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14	ETRTO

LLF02e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	14.5	TRA
★	315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	14.5	TRA

★: SmartWay

A928



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/65R22.5	24	164	J	11.75	-	-	5000	900	1072	389	16.5	ETRTO

KTD101



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S marking.
- High wear resistance.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRT0
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
	295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRT0
	295/80R22.5	16	150/147	L	9.00	3075	830	3350	830	1044	298	23.0	GB
	295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	23.0	ETRT0
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE

LIGHT TRUCK



AAR22s

RADIAL TRUCK TIRE
For national and regional transportation

P69



LONG HAUL


REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER

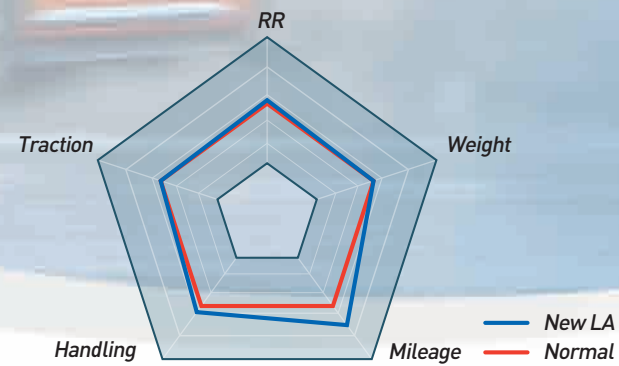

ORIGIN: THAILAND

3 Sidewall protector ribs preserve casing durability by fighting curbing damage with thick ribs on both sidewalls.



RESISTANCE GOOD HANDLING



(ALL POSITION)

Radial truck tire

(For national and regional transportation)

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
225/70R19.5	128 / 126 M	14	G	3750	110	3970	110	32.08	8.94	20
245/70R19.5	135 / 133 M	16	H	4540	120	4805	120	33.14	9.61	20





LEAO TIRE



F820




Suitable for medium trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
	205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	12.5	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO
	225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
	225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
	235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	13.0	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO
	245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
	245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
	245/70R19.5	16	135/133	M	7.50	2060	830	2180	830	839	248	13.0	TRA
	245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	13.0	ETRTO
	245/70R19.5	18	141/140	J	7.50	2500	850	2575	850	839	248	13.0	ETRTO




D905



- Suitable for medium trucks running on the high-grade road.
- Good braking and grip on wet road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	15.0	ETRTO
	215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	15.0	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
	235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO

KTA303




Suitable for all position axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- HAT technology: low heat generation.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	11.5	ETRTO
	215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	12.0	ETRTO
	215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.0	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO

KTD303



Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9.5R17.5	18	143/141	L	6.75	2575	875	2725	875	842	240	14.5	ETRTO
	215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.0	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO



LEAO TIRE



AFL866




- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	6.00R13LT	8	93/89	L	4.50B	580	460	650	460	655	170	10.0	GB
	6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
	6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
	6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
	7.00R15LT	12	113/109	L	5.50F	1030	670	1150	670	750	200	12.5	GB
	7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
	7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
	7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
	7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
	8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
	205/65R17.5	16	129/127 132/132	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
	215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
	215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
	215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
	225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA
	225/90R17.5	14	127/125	L	6.75	1650	700	1750	700	851	226	13.0	JATMA
	225/90R17.5	16	128/126	L	6.75	1700	700	1800	700	851	226	13.0	JATMA
	235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
	245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO



LLF26



Suitable for medium trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
	8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
	8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
	8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
	9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
	9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	12.0	ETRTO



KCA651



Suitable for all position axle of light trucks.

- Thick sidewall design protects against sidewall impacts and bruises.
- Zig-zag grooves for excellent handling.
- HAT technology: low heat generation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.00R16LT	12	115/110	M/N	5.50F	1060	670	1215	670	775	200	10.0	GB
	7.00R16LT	14	118/114	M	5.50F	1180	770	1320	770	775	200	10.0	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.0	GB



LEAO TIRE



KMA652



Suitable for all position axle of light trucks.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	10.0	GB
	7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	11.0	GB
	8.25R16LT	12	123/119	K	6.50H	1360	560	1550	560	855	235	11.5	GB
	8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	11.5	GB



KMA653




Suitable for all position axle of trucks.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	11.5	GB
	7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	12.5	GB
	8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	13.0	GB



F830




Suitable for small trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
	7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



AAM903




- Suitable for medium trucks running on on/off road.
- High traction.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.50R16LT	8	112/107	L/M	6.00G	975	460	1120	460	805	215	9.5	GB



AAL812



Suitable for small trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
	205/85R16LT	12	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE



LAL867



Suitable for small trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
	205/85R16LT	12	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



LAL815



- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	15.0	JATMA



L202-T




- Suitable for medium trucks running on the high-grade road.
- New siping design improves wet performance.
- Low rolling resistance, reducing fuel consumption.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	205/65R17.5	16	129/127 [132/132]	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
	215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
	245/70R17.5	18	143/141	J	7.50	2575	900	2725	900	789	248	12.5	ETRTO



L202-D




- Suitable for medium trucks running on the high-grade road.
- New siping design improves wet performance.
- Low rolling resistance, reducing fuel consumption.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	11.5	ETRTO
	215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
	225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.5	ETRTO
	235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	13.5	ETRTO
	245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
	245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	14.5	ETRTO



L202-S



- Suitable for medium trucks running on the high-grade road.
- Stone rejection design protect groove bottom from stone puncture.
- Safe driving and braking thanks to 4 Z-shaped longitudinal grooves.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	10.5	ETRTO
	215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	11.5	ETRTO
	225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	11.5	ETRTO
	235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
	245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
	245/70R19.5	18	141/140	J	7.50	2500	850	2575	850	839	248	12.5	ETRTO



LLF86




- Suitable for medium trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO



LLA78



- Suitable for medium trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	13.0	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO
	245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.0	ETRTO



F835




- Suitable for small trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
	LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	248	11.1	TRA
	ST235/80R16	14	129/125	M	6 1/2J	1650	760	1850	760	780	235	8.9	TRA
	ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	800	235	8.9	TRA



KJT016



Regional Haul Application / Pickup & Delivery Service Drive.

- Aggressive zigzag center grooves and open shoulder grooves provide outstanding traction in mud and snow.
- Stone rejectors protect the casing in base of the tread groove.
- Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 3D SIPS locks together under compression for the stability of a solid block.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	TRA
	225/70R19.5	14	128/126	N	6.75	1700	760	1800	760	811	226	15.0	TRA



LEAO TIRE

ON&OFF ROAD



LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



AAM31

RADIAL TRUCK TIRE
Mixed Service All Position

P83



AAM32

RADIAL TRUCK TIRE
Service All Position Wide Base Tire

P85



M205-A

RADIAL TRUCK TIRE
Mixed Service All Position

P87




M205-D

RADIAL TRUCK TIRE
Service drive Wide Base Tire


P89



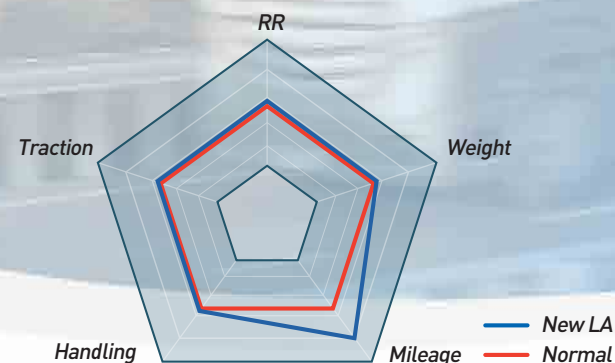

ORIGIN: THAILAND

3 Center lug with diagonal sipes to promote traction in wet or dry conditions for the life of the tread.

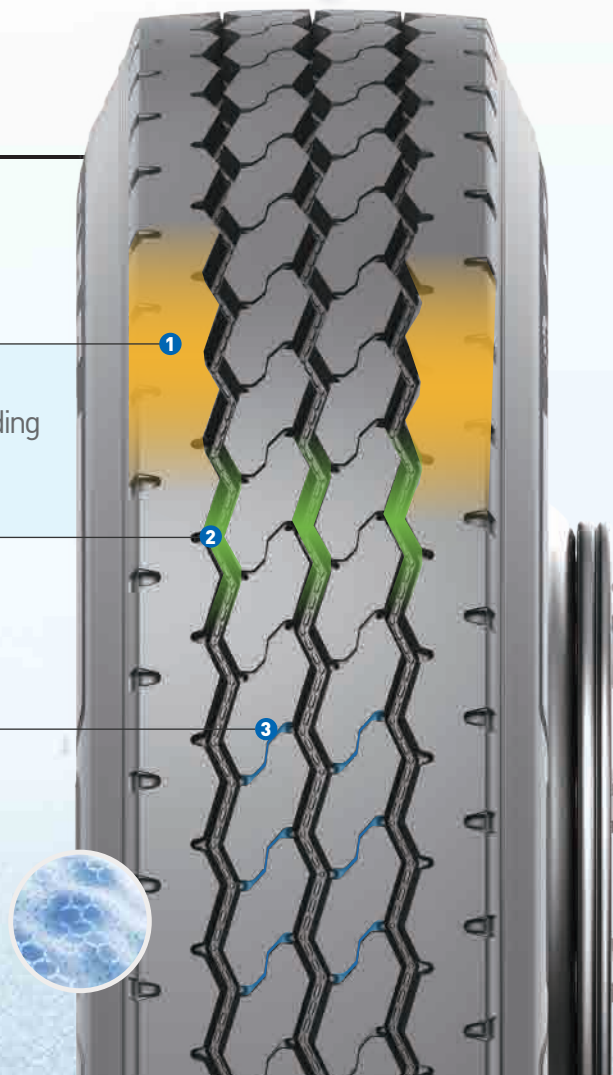


All Position

Size	Load index & Speed symbols	PR	Load Range	Max Load and Inflated Pressure				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
255/70R22.5	140/137 M	16	H	5070	120	5510	120	36.54	10.16	17
11R22.5	146/143K	16	H	6005	120	6610	120	41.09	11.06	19
11R24.5	149/146K	16	H	6610	120	7160	120	43.06	11.06	19
315/80R22.5	157/154 K	20	L	8270	130	9090	130	42.33	12.60	19



AAM32w

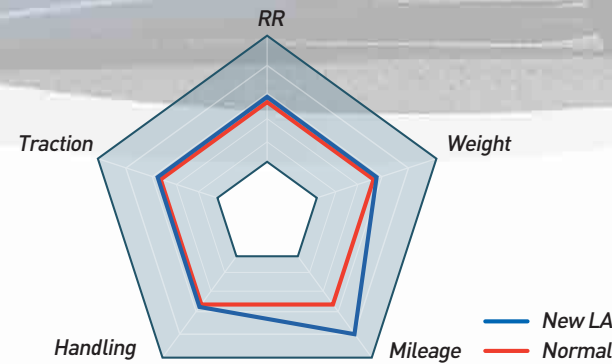


RADIAL TRUCK TIRE

ORIGIN: THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Open shoulder offers good traction while durable tread compound and robust shoulder block designed for excellent wear resistance.
- 2 Self-cleaning tread pattern provides high traction with stone rejector platforms in every groove for excellent durability.
- 3 Tread compounded and constructed to resist cuts and impacts in mixed service.

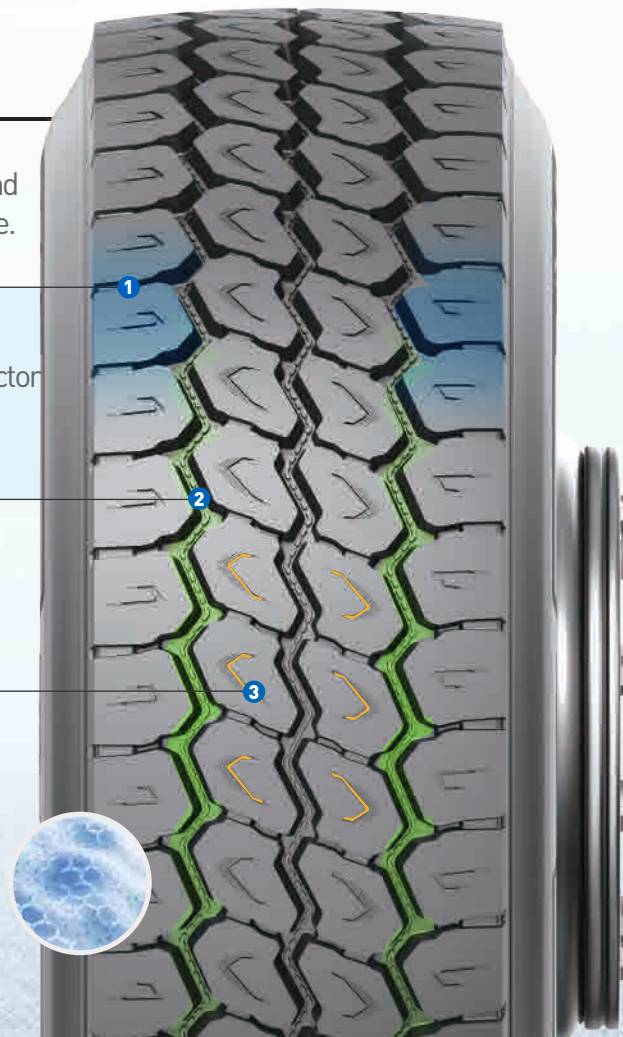

WEAR-RESISTANT



TRACTIVE FORCE




All Position

Size	Load index & Speed symbols	PR	Load Range	Max Load and Inflated Pressure				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
385/65R22.5	160 K	20	L	-	-	9920	130	42.22	14.96	21



M205-A

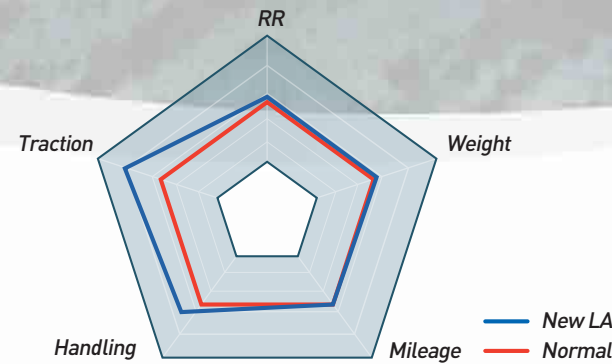

RADIAL TRUCK TIRE



ORIGIN: EUROPE

SELLING POINTS OF TIRE PRODUCTS

- 1 Tread Compound helps resist cuts and chips for enhanced endurance.
- 2 All-position tread design helps enhance traction on and off the road.



ANTI-PINCH STONE



TRACTIVE FORCE




All Position

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	17.0	ETRTO
385/65R22.5	24	164	J	11.75	-	-	5000	900	1072	389	18.0	ETRTO



M205-D

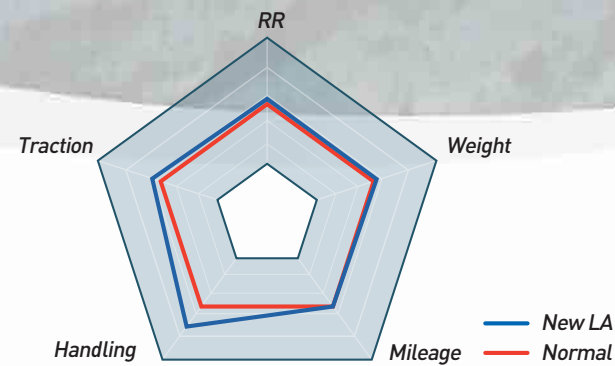

RADIAL TRUCK TIRE



ORIGIN: EUROPE

SELLING POINTS OF TIRE PRODUCTS

- 1 Progressive, variable-width grooves, less stone retention.
- 2 New groove shapes provides greater traction on slippery road surfaces.
- 3 New tread compound improved resistance to wear and tear.



ANTI-PINCH STONE



TRACTIVE FORCE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	21.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	21.0	ETRTO





LLA08



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	13.5	GB
	8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	15.5	GB
	8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	15.5	GB
	8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	15.5	GB
	9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.0	TRA
	9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.0	GB
	10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	15.5	TRA
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB
	11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
🏔️	12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	TRA
	12.00R20	20	156/153	J/K	8.5	3650	900	4000	900	1125	315	17.0	GB
🏔️	12.00R20	22	158/155	J	8.5	3875	970	4250	970	1125	315	17.0	CAS
🏔️	12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
🏔️	12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
	11R22.5	14	144/142	K	8.3	2650	720	2800	720	1054	279	15.0	TRA
	11R22.5	16	146/143	K	8.3	2725	830	3000	830	1054	279	15.0	TRA
	11R22.5	16	148/145	K	8.3	2900	850	3150	850	1054	279	15.0	ETRTO
	11R22.5	18	149/146	L/K	8.3	3000	930	3250	930	1054	279	15.0	GB
	11R24.5	14	146/143	K	8.3	2725	720	3000	720	1104	279	16.5	TRA
	11R24.5	16	149/146	K	8.3	3000	830	3250	830	1104	279	16.5	TRA
🏔️	12R22.5	16	152/148	K	9.0	3150	850	3550	850	1084	300	17.0	ETRTO
	12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	17.0	GB
	12R24.5	16	152/149	K	9.0	3250	830	3550	830	1135	300	16.0	TRA
	12R24.5	18	154/151	K	9.0	3450	930	3750	930	1135	300	16.0	GB
	13R22.5	18	156/150	K	9.8	3350	875	4000	875	1124	320	14.0	ETRTO
	13R22.5	20	156/153	K	9.8	3650	930	4000	930	1124	320	14.0	GB
	255/70R22.5	16	140/137	M	7.5	2300	830	2500	830	930	255	12.7	TRA
	295/80R22.5	16	152/148	K	9.0	3150	850	3550	850	1044	298	16.0	ETRTO
	295/80R22.5	18	154/149	K	9.0	3250	850	3750	850	1044	298	16.0	ETRTO
🏔️	315/80R22.5	18	154/150	M	9.0	3350	825	3750	825	1076	312	17.5	ETRTO
🏔️	315/80R22.5	20	156/150	L	9.0	3350	850	4000	850	1076	312	17.5	ETRTO
	315/80R22.5	22	158/150	L	9.0	3350	900	4250	900	1076	312	17.5	ETRTO



D960



- Deep and rigid block design for long life and good traction.
- Cut resistance compound.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
	12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
	12.00R20	20	156/153	J	8.5	3650	900	4000	900	1125	315	21	GB
	12.00R20	22	158/155	J	8.5	3875	970	4250	970	1125	315	21	CAS
	12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21	ETRTO
	12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21	ETRTO
	12R22.5	16	152/148	K	9	3150	850	3550	850	1084	300	21	ETRTO
	12R22.5	18	152/149	J	9	3250	930	3550	930	1085	300	21	GB
	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21	ETRTO
	9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16	ETRTO
	9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16	ETRTO
	265/70R19.5	16	140/138	K	7.5	2360	775	2500	775	867	262	15.5	ETRTO
	265/70R19.5	18	143/141	K	7.5	2575	850	2725	850	867	262	15.5	ETRTO
	275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21	ETRTO
	295/80R22.5	16	152/148	F	9	3150	850	3550	850	1050	298	22	ETRTO
	295/80R22.5	18	152/149	F	9	3250	900	3550	900	1050	298	22	GB
	295/80R22.5	18	154/149	F	9.00	3250	850	3750	850	1050	298	22	ETRTO
	315/80R22.5	18	154/150	M	9	3350	825	3750	825	1076	312	21	ETRTO
	315/80R22.5	20	156/150 (154/150)	L(M)	9	3350	850	4000	850	1076	312	21	ETRTO

AD0986



Suitable for hilly area and mine etc., off road conditions.

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
	12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB
	12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	25.5	ETRTO
	12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	25.5	ETRTO
	12.00R24	20	160/157	F	8.5	4125	900	4500	900	1226	315	25.5	GB
	12.00R24	18	158/155	F	8.5	3875	830	4250	830	1226	315	25.5	GB
	11R22.5	14	144/142	F	8.25	2650	720	2800	720	1065	279	24.5	TRA
	11R22.5	16	146/143	F	8.25	2725	830	3000	830	1065	279	24.5	TRA
	11R22.5	16	148/145	F	8.25	2900	850	3150	850	1065	279	24.5	ETRTO
	11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	24.5	TRA
	11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	24.5	TRA
	12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.5	ETRTO
	12R22.5	18	152/149	F	9.00	3250	930	3550	930	1096	300	24.5	GB
	13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.5	ETRTO
	295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
	295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	24.5	GB
	315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.5	ETRTO
	315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.5	ETRTO

KMA400



Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
	8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
	9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
	11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
	12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	GB
	12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	17.0	GB
	12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
	12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	17.0	GB
	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19	ETRTO
	13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19	ETRTO
	295/80R22.5	16	152/148	K	9	3150	850	3550	850	1044	298	19	ETRTO
	295/80R22.5	18	152/149	K	9	3250	900	3550	900	1044	298	19	GB
	315/80R22.5	18	154/150	K	9	3350	825	3750	825	1076	312	19	ETRTO
	315/80R22.5	20	156/150	K	9	3350	850	4000	850	1076	312	19	ETRTO
	315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19	ETRTO
	425/65R22.5	20	165	K	13	---	---	5150	825	1124	430	18.5	ETRTO
	445/65R22.5	20	169	J/K	14	---	---	5800	900	1150	454	18.5	ETRTO



LEAO TIRE

KMD406



Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
	315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
	315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	21.0	ETRTO

KMD402



Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
	315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.5	ETRTO
	315/80R22.5	20	156/150(154/150)	K (L)	9.00	3350	850	4000	850	1076	312	22.5	ETRTO

KXA400



Suitable for trailer and steer axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S marking.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/65R22.5	18	158	L	11.75	---	---	4250	850	1072	389	18.0	ETRTO
	385/65R22.5	20	160(158)	K(L)	11.75	---	---	4500	900	1072	389	18.0	ETRTO
	385/65R22.5	24	164	J	11.75	---	---	5000	900	1072	389	18.0	ETRTO
	425/65R22.5	20	165	K	12.25	---	---	5150	825	1124	422	18.5	ETRTO

KMD401



Suitable for drive axle of trucks under all kinds of working conditions.

- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	20.5	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.5	ETTRO
	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA
	295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	20.5	ETTRO
	295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	20.5	GB

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE



AD0986+



Suitable for hilly area and mine etc., off road conditions.

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth and wide tread width increase mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12.00R20	22	158/155	B	8.5	3875	970	4250	970	1136	315	32.0	CAS
	12.00R24	18	158/155	F	8.5	3875	830	4250	830	1238	315	32.0	GB/TRA
	12.00R24	20	160/157	F	8.5	4125	900	4500	900	1238	315	32.0	GB
	12.00R24	22	162/158	B	8.5	4250	900	4750	900	1238	315	32.0	—



D969



- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	8.25R20	12	133/131	F	6.5	1950	720	2060	720	986	236	21.5	GB
	8.25R20	14	136/134	F	6.5	2120	830	2240	830	986	236	21.5	GB
	8.25R20	16	139/137	F	6.5	2300	930	2430	930	986	236	21.5	GB
	10.00R20	18	149/146	J	7.5	3000	930	3250	930	1065	278	25.5	GB
	11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	25.5	GB
	12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	25.5	TRA
	12R22.5	18	152/149	J	9.00	3250	930	3550	930	1096	300	25.5	GB
	295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



ADR978(+)



- Good traction.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
	12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	19.0	GB
	12.00R20	20	156/153	J	8.5	3650	900	4000	900	1125	315	19.0	GB
	12.00R20	22	158/155	J	8.5	3875	970	4250	970	1125	315	19.0	GAS
	12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.5	ETRTO
	12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	20.5	GB
	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
	315/80R22.5	20	156/150(154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



KMA40



Suitable for all position axle of trucks under all kinds of working conditions.

- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	18.3	TRA
	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	18.3	TRA

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE



D955



- Suitable for medium trucks running on the normal road.
- Good braking and grip on wet road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
	7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.5	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
	8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	15.5	GB
	8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
	8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	15.5	GB
	225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	14.5	TRA
	225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	14.5	TRA
	245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
	245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
	245/70R19.5	16	135/133	M	7.50	2060	830	2180	830	839	248	15.5	TRA
	245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO



A968/LTR968*



- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R15TR	14	137/135	L	7.50	2180	720	2300	720	927	278	17.5	TRA
	10.00R15TR	16	141/139	K	7.50	2430	830	2575	830	927	278	17.5	TRA
	11R17.5	14	137/135	L	8.25	2180	720	2300	720	927	279	17.5	TRA
	11R17.5	16	141/139	K	8.25	2430	830	2575	830	927	279	17.5	TRA
	11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	17.5	TRA
	11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	17.5	TRA
	11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	17.5	ETRTO
	11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	17.5	TRA
	11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	17.5	TRA
	275/70R22.5*	16	148/145	K	8.25	2900	900	3150	900	958	276	17.0	ETRTO

D950



- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
	11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
	11R24.5	14	146/143	F/G	8.25	2725	720	3000	720	1116	279	24.9	TRA
	11R24.5	16	149/146	F/G	8.25	3000	830	3250	830	1116	279	24.9	TRA
	285/75R24.5	16	147/144	J	8.25	2800	830	3075	830	1062	283	23.0	TRA
	295/75R22.5	16	146/143	J	9.00	2725	830	3000	830	1026	298	23.0	TRA



LLA38



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/55R22.5	18	158	L	12.25	—	---	4250	850	996	386	16.5	ETRTO
	385/55R22.5	20	160	J	12.25	—	---	4500	900	996	386	16.5	ETRTO
	385/65R22.5	18	158	K	11.75	—	---	4250	850	1072	389	16.5	ETRTO
	385/65R22.5	20	160	J/K	11.75	—	---	4500	900	1072	389	16.5	ETRTO
	385/65R22.5	24	164	J	11.75	—	---	5000	900	1072	389	16.5	ETRTO
	425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
	425/65R22.5	20	165	J/K	12.25	—	---	5150	825	1124	422	17.5	ETRTO
	445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	18.0	TRA
	445/65R22.5	20	169	J	13.00	—	---	5800	900	1150	444	18.0	ETRTO



LEAO TIRE



AAR919



- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improve the wear mileage.
- Powerful traction, grip and climbing performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	19.0	TRA
	11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	19.0	ETRTO
	325/95R24	22	162/160	K	9.0	4500	850	4750	850	1228	325	18.0	ETRTO



KMA403



Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
	11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
	11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
	12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
	12.00R20	20	156/153	J	8.5	3650	900	4000	900	1125	315	15.5	GB
	12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
	12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO
	11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	14	ETRTO
	12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	15.5	GB
	13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	15.5	GB
	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	15.5	ETRTO
	13R22.5	20	156/153	K	9.75	3650	930	4000	930	1124	320	15.5	GB
❄️	295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	15.0	ETRTO
❄️	315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
	385/65R22.5	20	160	K	11.75	—	—	4500	900	1072	389	16.0	ETRTO
	385/65R22.5	24	164	G	11.75	—	—	5000	900	1072	389	16.0	ETRTO

KMD403



Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	19.0	ETRTO
	12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	19.0	GB
	13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	19.0	GB
	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
❄️	295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.5	ETRTO
❄️	295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.5	ETRTO
❄️	315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
❄️	315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO



AAR959



- Wide and deep tread grooves for long tire life.
- Excellent cutting and chipping resistance.
- Robust tread and high traction on rough surfaces.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	18.0	GB
	9.00R20	16	144/142	D	7.0	2650	900	2800	900	1019	259	20.0	GB
	10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.0	GB
	12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	19.0	GB
	12.00R20	20	156/153	F	8.5	3650	900	4000	900	1125	315	19.0	GB
	325/95R24	22	162/160	K	9.0	4500	850	4750	850	1228	325	23.0	ETRTO



LEAO01



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	17.5	ETRTO
	13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	17.5	GB
	13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.5	ETRTO



LEAO58



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRT0



LLD09



- Rigid block design for good traction.
- Cut resistance compound.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB



AD0983



Suitable for hilly area and mine etc., off road conditions.

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.0	GB
	12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.0	GB
	295/80R22.5	18	154/149	F	9.00	3250	850	3750	850	1044	298	22.0	ETRT0



AD0993K



Suitable for mine, off road conditions.

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	24.5	GB
	10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.5	GB
	11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.5	GB
	12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
	12.00R20	20	156/153	F(B)	8.5	3650	900	4000	900	1136	315	24.5	GB

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE



AD0912



- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
	275/80R22.5	16	149/146	J	8.25	3000	850	3250	850	1012	276	20.0	ETRTO
	295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



D960+



Suitable for hilly area and mine etc., off road conditions.

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.9	ETRTO



ADM991



Suitable for off road conditions.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	445/45R19.5	24	164	D	15.00	---	---	5000	830	895	446	13.0	ETRTO



LLD10



- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
	9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
	10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
	11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
	12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	21.0	TRA
	12.00R20	20	156/153	F	8.5	3650	900	4000	900	1125	315	21.0	GB
	13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO
	13R22.5	20	156/153	F	9.75	3650	930	4000	930	1124	320	20.0	GB



M-A40A



Suitable for all position axle of trucks under all kinds of working conditions.

- Anti wear and tear compound system ensures the anti-wear performance.
- Longitudinal zig-zag pattern together with the transverse sipe enhance traction performance on mixed roads.
- Pattern with high saturation ratio guarantee the wear performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	275/80R22.5	16	147/144	K	8.25	2800	830	3075	830	1012	276	14.0	GB
	275/80R22.5	18	149/146	K	8.25	3000	900	3250	900	1012	276	14.0	GB
	275/80R22.5	18	149/146	K	8.25	3000	850	3250	850	1012	276	14.0	ETTRO



LEAO TIRE

KMD400



Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	24.0	GB

LLA08A



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	275/80R22.5	16	147/144	K	8.25	2800	830	3075	830	1012	276	16.0	GB
	275/80R22.5	16	149/146	K	8.25	3000	850	3250	850	1012	276	16.0	ETTRO
	275/80R22.5	18	149/146	K	8.25	3000	900	3250	900	1012	276	16.0	GB

LLA08e+



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.
- Certified by U.S.A SmartWay.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
★	11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.0	TRA
★	11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	16.5	TRA

★: SmartWay



LEAO TIRE

COACH & URBAN



LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



AAU802



- Enhanced sidewall ensures high safety.
- Long service life.
- Typical used for urban bus.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	F	8.25	2725	830	3000	830	1054	279	20.0	TTRA
	11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
	255/70R22.5	16	140/137	J	7.50	2300	800	2500	800	930	255	19.0	ETRTO
	275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
	295/80R22.5	16	152/148(154/150)	J(E)	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
	295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB
	305/70R22.5	16	152/148(154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO



AAU609



- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%, with application of ST steel cord.
- Tire bead cracking is prevented, with application fiber layer in bead area.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.0	ETRTO
	245/70R19.5	12	129/127	J	7.50	1850	660	1750	660	839	248	16.0	TRA
	245/70R19.5	14	133/131	J	7.50	2060	760	1950	760	839	248	16.0	TRA
	245/70R19.5	14	133/131	J	7.50	2060	750	1950	750	839	248	16.0	ETRTO
	245/70R19.5	16	135/133	J	7.50	2180	830	2060	830	839	248	16.0	TRA
	245/70R19.5	16	136/134	J	7.50	2240	825	2120	825	839	248	16.0	ETRTO
	275/70R22.5	16	148/145	J	8.25	2900	900	3150	900	958	276	21.0	ETRTO
	275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	21.0	ETRTO
	275/70R22.5	18	150/148(152/148)	J(F)	8.25	3150	900	3350	900	958	276	21.0	ETRTO
	305/70R22.5	20	152/150 (154/150)	J(F)	9.00	3350	900	3550	900	1000	305	21.0	ETRTO



AFL866



- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	6.00R13LT	8	93/89	L	4.50B	580	460	650	460	655	170	10.0	GB
	6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
	6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
	6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
	7.00R15LT	12	113/109	L	5.50F	1030	670	1150	670	750	200	12.5	GB
	7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
	7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
	7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
	7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
	8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
	205/65R17.5	16	129/127 132/132	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
	215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
	215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
	215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
	225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA
	225/90R17.5	14	127/125	L	6.75	1650	700	1750	700	851	226	13.0	JATMA
	225/90R17.5	16	128/126	L	6.75	1700	700	1800	700	851	226	13.0	JATMA
	235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
	245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO



LEAO TIRE

WINTER



LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER



ADW807



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
	6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
	7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
	7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
	8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
	11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	20.0	JATMA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	20.0	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	20.0	ETRTO
	295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
	295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	20.0	GB
	315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	20.0	ETRTO



KWD600



Suitable for drive axle of trucks under snow condition.

- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
	315/80R22.5	20	156/150(154/150)	L/M	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



ADW808



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
	6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	12.0	GB
	7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
	215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	13.0	ETRTO
	215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	13.0	ETRTO
	215/75R17.5	14	125/122	L	6.00	1500	760	1650	760	767	211	13.0	GB
	215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	13.0	GB
	225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	13.5	GB
	225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	13.5	GB
	235/75R17.5	14	129/126	L	6.75	1700	760	1850	760	797	233	14.0	GB
	235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.0	ETRTO
	235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.0	GB
	235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.0	ETRTO
	235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.0	ETRTO
	245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	15.0	ETRTO
	245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	15.0	ETRTO
	245/70R17.5	18	143/141	L	7.50	2575	875	2725	875	789	248	15.0	ETRTO



LEAO TIRE



AFW806



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Low noise.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
	6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
	7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
	7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
	7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.0	GB
	8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
	11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	15.0	JATMA
	11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	15.0	TRA
	11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	15.0	ETRTO
	11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	15.0	TRA
	11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	15.0	TRA
	275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	15.0	ETRTO
	275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	15.0	GB
	315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
	295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	15.0	TRA
	295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	15.0	TRA
	295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
	295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	15.0	GB
	315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
	315/80R22.5	20	156/150(154/150)	L/M	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
	385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO

KWT600



- For trailer axle of trucks under snow condition use only.
- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	14.5	ETRTO
	385/55R22.5	20	160[158]	K[L]	12.25	--	--	4500	900	996	386	14.5	ETRTO
	385/65R22.5	20	160[158]	K[L]	11.75	--	--	4500	900	1072	389	15.5	ETRTO
	385/65R22.5	24	164[158]	K[L]	11.75	--	--	5000	900	1072	389	15.5	ETRTO

KWD601



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	245/70R19.5	12	129/127	M	7.50	1850	660	1750	660	839	248	14.5	TRA
	245/70R19.5	14	133/131	M	7.50	2060	760	1950	760	839	248	14.5	TRA
	245/70R19.5	14	133/131	M	7.50	2060	750	1950	750	839	248	14.5	ETRTO
	245/70R19.5	16	135/133	M	7.50	2180	830	2060	830	839	248	14.5	TRA
	245/70R19.5	16	136/134	M	7.50	2240	825	2120	825	839	248	14.5	ETRTO



KWD700



- 3D Kerf technology provides excellent traction and long original tread life.
- Wide tread design and combined structure of rib and block pattern provides stability, longer mileage, and better handling performance in all weather conditions.
- Long life, low rolling resistance.
- Optimizes the footprint for even wear and long tread life.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	21.5	TRA
	11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	21.5	TRA



AS-A10



- High safety and good handling with M+S and All Season marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
						Dual		Single					
						kg	kpa	kg	kpa				
	245/70R19.5	16	136/134	J	7.50	2120	850	2240	850	839	248	18.5	JATMA

LONG HAUL

REGIONAL

LIGHT TRUCK

ON&OFF ROAD

COACH&URBAN

WINTER

