



LEAO TIRE



PCR TIRE 2025

TIRE CATALOGUE

*Reaching new heights
in the tire industry
through relentless
pursuit*

Wang Xicheng





LEAO TIRE

TABLE OF CONTENTS

COMPANY INTRODUCTION		P05
COMPANY INTRODUCTION		P05
Abundant sports marketing sponsorship		P07
Internationalization of Production		P09
Internationalization of R&D		P13
Summer TIRE		P15
THUNDER 100	THUNDER-200	P17/17
NOVA-FORCE	NOVA-FORCE ACRO	P18/19
P98	SPORT G5	P21/22
NOVA-FORCE HP ¹⁰⁰	NOVA-FORCE C/S	P23/25
NOVA-FORCE Van	NOVA-FORCE Van ^{HP}	P27/29
NOVA-FORCE Van PLUS		P29
All Season (M+S) TIRE		P31
LION SPORT ³	LION SPORT HP ³	P33/35
LION SPORT GP	LION SPORT 4X4 ^{HP3}	P36/37
LA35	LION SPORT H / T	P38/39
LION SPORT A / T	LION SPORT X / T	P40/42
LION SPORT R / T	LION SPORT M / T	P42/43
LION SPORT AT-2	RADIAL666	P45/46
RADIAL R701	EXC100	P47/47
LA R781		P48
All Weather (3PMSF) TIRE		P49
iGREEN All Season	LION SPORT A / T ¹⁰⁰	P49/51
iGREEN VAN 4S		P52
Winter/Snow TIRE		P53
Winter Defender UHP	Winter Defender HP	P55/56
Winter Defender Van		P57
Winter/Ice TIRE		P58
Winter Defender Ice I-15	Winter Defender Ice I-15 SUV	P58/59
I-17		P61
Winter/Stud TIRE		P63
Winter Defender Grip ²	Winter Defender Grip	P63/64
Winter Defender Grip ^{SUV}	Winter Defender Grip Van ²	P65/66



LEAO TIRE

COMPANY INTRODUCTION

LEAO TIRE

NOVA FORCE ACRO

LION SPORT HT

IGREEN ALL SEASON



Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales.

Founded in 1975, the company has seven R&D centers, seven manufacturing bases across the world currently and over 17,783 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets.

Including **LINGLONG**, **ATLAS**, **LEAO** and **EVOLUXX** etc. Linglong Tire had successful access to the A share market on July 6, 2016.

**EVOLUXX**

In the future, the company will fully implement its global layout, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

en.linglong.cn



LEAO TIRE

BRAND VALUE

It strengthens the retail network construction, with nearly

200,000

Marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers.

Linglong's brand value reached

98.137

Billion RMB in 2024

Linglong has sponsored over

100

Sports events and teams worldwide

Abundant sports marketing sponsorship

such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.





LEAO TIRE

GLOBAL LAYOUT

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern.



R&D Center in America

R&D Center in Germany

Serbia

Linglong International Europe d.o.o.Zrenjanin

R&D Center

- R&D Center in Zhaoyuan and Yantai
- R&D Center in Beijing
- R&D Center in Shanghai
- R&D Center in Jinan

Linglong Tyre Co.,Ltd.

- Jilin Linglong Tyre Co.,Ltd.
- Shandong Linglong Tyre Co.,Ltd.
- Dezhou Linglong Tyre Co.,Ltd.
- Shaanxi Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co.,Ltd.
- Guangxi Linglong Tyre Co.,Ltd.
- Anhui Linglong Tyre Co.,Ltd.

Linglong International Tyre(Thailand)Co.,Ltd

7+5 STRATEGIC GLOBAL POSITIONING

In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia. Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.



90° N

On August 7th, 2016, Linglong Tire reaching North Pole



90° S

On December 3, 2016, Linglong Tire reaching South Pole

Europe



Ads on ten clubs of Europe five major league matches



GLOBAL PARTNER

Global Club of Champions Partner and Official Jersey Sleeve Sponsor of VfL Wolfsburg



Sponsor of Serbian SuperLiga from 2019 to 2022



Title sponsor of Linglong Tire Cup Sino-European Chess Elite Tournament

Africa



Sponsor the Uganda National Basketball Team

Sponsor Zimbabwe Cricket

Asia



Senior sponsor for the China Pavilion at Expo 2020 Dubai.



Set up ATLAS Tire Drift Team for DCGP Set up Linglong Tire Drift Team for D1 GRAND PRIX in Japan



Sponsor China Truck Racing Championship from 2015 to 2017



Sponsor the Ratchaburi Mitr Phol FC



Sponsor Chinese Volleyball League of 2017-2020 season



Official Partner of Formula Drift Japan

Oceania



Sponsor Brisbane Roar FC



Sponsor Australia Queensland Football Team

North America



Official Automotive Tire of the NHL Tampa Bay Lightning



Official Automotive Tire of USF Athletics



Official Partner of NBA China Games

South America



Sponsor Brazilian football club to improve its brand awareness in South America



LEAO TIRE

PROFESSIONAL AUTHORITATIVE LARGE OUTDOOR COMPREHENSIVE TIRE PROVING GROUND



Professional Authoritative Large Outdoor Comprehensive Tire Proving Ground

The Sino-Asia Tire Proving Ground is invested by Linglong Group, designed and constructed by a top international professional team. The total investment is nearly RMB 1.3 billion yuan. It builds 17 kinds of tire test tracks including wet handling road, wet ring, fatigue endurance road, NVH and comfort road, multi-functional platform and test mountain, off-road road, etc., covering the tire test of passenger vehicle, light trucks, heavy-duty trucks and buses, it can conduct field monitoring and indoor tests on more than 40 performance indicators such as tire handling, economy and comfort.



Automobile Testing Center

The second phase of the automobile testing center project plans to invest 1.314 billion yuan, including indoor laboratories such as the vehicle performance laboratory, parts laboratory, vehicle energy consumption/new energy laboratory, dynamics laboratory, intelligent networking laboratory, NVH laboratory, dynamic imprint laboratory, and intelligent networking testing field.

The project also includes 43 customer workshops of different specifications, 3 warehousing centers, and Huizhi Hotel. After completion, it will become a third-party testing platform for the automotive industry to gather innovation and service innovation.



Virtual Simulation Technology

In 2021, virtual simulation technology has made another breakthrough, promoting the application of whole vehicle driving simulator technology, virtualizing the whole vehicle and tires, adopting the VI grade DIM250 model, and achieving a 9-degree-of-freedom driving experience.

At that time, this technology will be the first in the industry and currently the largest and most advanced tire simulation technology in China.



T1, the asphalt concrete high-speed runway with the largest inclination in the world




T9, the first wet control road in China



T10, wet circular loop



LEAO TIRE

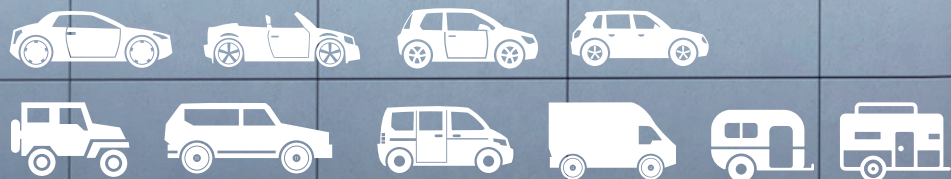

SUMMER TIRE



NOVA-FORCE ACRO

EXCELLENT HANDLING AND
COMFORTABLE PERFORMANCE

P19



NOVA-FORCE HP¹⁰⁰

HP TIRE WITH LOW RR
PERFORMANCE AND LOW NOISE

P23



NOVA-FORCE C/S

GOOD HANDLING AND
COMFORTABLE PERFORMANCE

P25



SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



SUV-HP

THUNDER 100



- Excellent handling and wet grip performance sport tire

Excellent handling performance and provides precise steering for driving.

Enhanced performance in wet condition.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
18"	265/60R18	110	V	8J	1060	2337	300	44
	255/50R18 XL	106	V	8J	950	2094	340	50
	255/55R18	109	V	8J	1030	2271	340	50
20"	265/50R20 XL	111	V	8 1/2J	1090	2403	340	50



PCR-UHP

THUNDER-200



- Excellent handling performance sport tire

Continuous design of the center pattern improve acceleration performance.

Streamlined straw of the tire shoulder improves wet grip performance.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15"	195/50R15	82	V	6J	475	1047	300	44
	195/55R15	85	V	6J	515	1135	300	44
17"	205/45R17	88	W	7J	560	1235	340	50
	215/45R17	92	W	7J	615	1356	340	50
18"	225/40R18	92	W	8J	630	1389	340	50
	225/45R18	95	W	7 1/2J	690	1521	340	50
	245/45R18	100	W	8J	800	1764	340	50



PCR-UHP

NOVA-FORCE



- UHP Tire with Excellent Wet Grip and Low Noise

Excellent handling performance.

Improved drainage performance to effectively reduce risk of hydroplaning.

Superior driving stability.

Comfortable ride.

Designed to fit premium cars and sports cars.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16"	195/45R16 XL	84	V	6 1/2J	500	1102	340	50
	205/45R16 XL	87	W	7J	545	1201	340	50
	205/50R16	87	W	6 1/2J	545	1201	300	44
	205/50R16	87	V	6 1/2J	545	1201	300	44
	205/55R16 XL	94	W	6 1/2J	670	1477	340	50
	215/40R16 XL	86	W	7 1/2J	530	1168	340	50
	215/45R16 XL	90	V	7J	600	1323	340	50
	215/55R16 XL	97	W	7J	730	1521	340	50
	225/50R16 XL	96	V	7J	710	1565	340	50
	225/55R16	95	V	7J	690	1521	300	44
	205/40R17 XL	84	W	7 1/2J	500	1102	340	50
	205/45R17 XL	88	W	7J	560	1235	340	50
17"	205/45R17 XL	88	V	7J	560	1235	340	50
	205/50R17 XL	93	W	6 1/2J	650	1433	340	50
	215/40R17 XL	87	W	7 1/2J	545	1201	340	50
	215/45R17 XL	91	W	7J	615	1356	340	50
	215/50R17 XL	95	V	7J	690	1521	340	50
	215/50R17 XL	95	W	7J	690	1521	340	50
	215/55R17	94	V	7J	670	1477	300	44
	215/55R17 XL	98	W	7J	750	1653	340	50
	225/45R17 XL	94	W	7 1/2J	670	1477	340	50
	225/50R17 XL	98	W	7J	750	1653	340	50
	225/55R17	97	W	7J	730	1521	300	44
	225/55R17	101	W	7J	825	1819	340	50
	235/45ZR17 XL	97	W	8J	730	1521	340	50
	235/50R17	96	Y	7 1/2J	710	1565	300	44
	245/40R17	91	W	8 1/2J	615	1356	300	44
18"	245/45R17 XL	99	W	8J	775	1709	340	50
	215/35R18 XL	84	W	7 1/2J	500	1102	340	50
	215/45R18 XL	93	W	7J	650	1521	340	50
	215/40R18 XL	89	W	7 1/2J	580	1279	340	50
	225/40R18 XL	92	W	8J	630	1389	340	50
	225/45R18 XL	95	W	7 1/2J	690	1521	340	50
	235/40R18 XL	95	W	8 1/2J	690	1521	340	50
	235/45R18 XL	98	Y	8J	750	1653	340	50
	235/50R18 XL	101	W	7 1/2J	825	1819	340	50
	245/40R18 XL	97	W	8 1/2J	730	1521	340	50
	245/45R18 XL	100	W	8J	800	1764	340	50
	255/35R18 XL	94	Y	9J	670	1477	340	50
19"	255/45R18 XL	103	W	8 1/2J	875	1929	340	50
	265/35R18 XL	97	Y	9 1/2J	730	1521	340	50
	225/35R19 XL	88	W	8J	560	1235	340	50
	225/45R19 XL	96	W	7 1/2J	710	1565	340	50
	235/35R19 XL	91	W	8 1/2J	615	1356	340	50
	235/55R19 XL	105	W	7 1/2J	925	2039	340	50
	245/40R19 XL	98	W	8 1/2J	750	1653	340	50
20"	245/45R19	98	Y	8J	750	1653	300	44
	265/30R19 XL	93	W	9 1/2J	650	1433	340	50
	225/35R20 XL	90	Y	8J	600	1323	340	50
	235/30R20 XL	88	Y	8 1/2J	560	1235	340	50
20"	245/35R20 XL	95	Y	8 1/2J	690	1521	340	50



LEAO TIRE

NOVA-FORCE ACRO

Excellent handling
and comfortable performance



Asymmetric tread pattern design for better drainage performance inside and grip performance outside.

Big shoulder blocks to effectively improve handling performance.

4 longitudinal groove design for superior driving stability and comfortable ride.



PCR-UHP

NOVA-FORCE ACRO

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16"	185/55R16 XL	87	W	6J	545	1201	340	50
	195/45R16 XL	84	V	6 1/2J	500	1102	340	50
	205/55R16 XL	94	W	6 1/2J	670	1477	340	50
	215/55R16 XL	97	W	7J	730	1609	340	50
	225/55R16	95	Y	7J	690	1521	300	44
17"	195/45R17 XL	85	V	6 1/2J	515	1135	340	50
	205/45R17 XL	88	Y	7J	560	1235	340	50
	205/50R17 XL	93	Y	6 1/2J	650	1433	340	50
	215/45R17 XL	91	Y	7J	615	1356	340	50
	215/50R17 XL	95	Y	7J	690	1521	340	50
	215/55R17	94	Y	7J	670	1477	300	44
	225/45R17 XL	94	Y	7 1/2J	670	1477	340	50
	225/50R17 XL	98	Y	7J	750	1653	340	50
	235/50R17 XL	100	W	7 1/2J	800	1764	340	50
	255/45R17 XL	102	W	8 1/2J	850	1874	340	50
18"	215/45R18 XL	93	W	7J	650	1433	340	50
	225/40R18 XL	92	Y	8J	630	1389	340	50
	225/45R18 XL	95	Y	7 1/2J	690	1521	340	50
	235/45R18 XL	98	Y	8J	750	1653	340	50
	235/45R18 XL	98	W	8J	750	1653	340	50
	245/40R18 XL	97	Y	8 1/2J	730	1609	340	50

NOVA-FORCE ACRO

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
18"	275/45R18 XL	107	W	9J	975	2149	340	50
	225/40R19 XL	93	Y	8J	650	1433	340	50
	225/45R19 XL	96	W	7 1/2J	710	1565	340	50
	225/55R19 XL	103	Y	7J	875	1929	340	50
19"	235/35R19 XL	91	Y	8 1/2J	615	1356	340	50
	235/40R19 XL	96	Y	8 1/2J	710	1565	340	50
	235/50R19 XL	103	Y	7 1/2J	875	1929	340	50
	255/30R19 XL	91	Y	9J	615	1356	340	50
	255/35R19 XL	96	Y	9J	710	1565	340	50
	255/40R19 XL	100	W	9J	800	1764	340	50
	275/40R19 XL	105	Y	9 1/2J	925	2039	340	50
	245/40R20 XL	99	Y	8 1/2J	775	1709	340	50
20"	245/45R20 XL	103	W	8J	875	1929	340	50
	255/35R20 XL	97	Y	9J	730	1609	340	50
	255/45R20 XL	105	W	8 1/2J	925	2039	340	50
	265/30R20 XL	94	Y	9 1/2J	670	1477	340	50
	275/35R20 XL	102	Y	9 1/2J	850	1874	340	50
	315/35R20 XL	110	W	11J	1060	2337	340	50
21"	295/35R21 XL	107	W	10 1/2J	975	2149	340	50

RFT

NOVA-FORCE ACRO RFT

16"	225/55RF16	95	W	7J	690	1521	300	44
17"	225/45RF17	91	W	7 1/2J	615	1356	300	44
	225/50RF17	94	W	7J	670	1477	300	44
	225/55RF17	97	W	7J	730	1609	300	44
18"	225/45R18	91	W	7 1/2J	615	1356	300	44
	245/40RF18	93	W	8 1/2J	650	1433	300	44
19"	245/45RF18	96	W	8J	710	1565	300	44
	225/40RF19	89	W	8J	580	1279	300	44
	245/40RF19	94	W	8 1/2J	670	1477	300	44
	245/45RF19	98	W	8J	750	1653	300	44
	255/35R19	92	Y	9J	630	1389	300	44
	255/55RF19	107	W	8J	975	2149	300	44
	275/35R19	96	Y	9 1/2J	710	1565	300	44
	275/40R19	101	Y	9 1/2J	825	1819	300	44
	245/40R20 XL	99	Y	8 1/2J	775	1709	340	50
20"	275/35R20 XL	102	Y	9 1/2J	850	1874	340	50
	275/40RF20	102	W	9 1/2J	850	1874	300	44
	275/45RF20	106	W	9J	950	2094	300	44
	315/35R20	110	Y	11J	1060	2337	340	50



PCR-UHP

P98

► Ultra high performance



Asymmetric tread pattern design for better handling performance and fashionable appearance.

Big shoulder blocks design,provide extreme steering performance.

Enhanced wet grip to effectively reduce risk of hydroplaning.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16"	215/55R16 XL	97	W	7J	730	1609	340	50
	185/55R16 XL	87	W	6J	545	1201	340	50
	195/45R16 XL	84	V	6 1/2J	500	1102	340	50
	205/55R16 XL	94	W	6 1/2J	670	1477	340	50
	215/55R16 XL	97	W	7J	730	1609	340	50
	225/55R16	95	Y	7J	690	1521	300	44
17"	195/45R17 XL	85	V	6 1/2J	515	1135	340	50
	205/45R17 XL	88	Y	7J	560	1235	340	50
	205/50R17 XL	93	Y	6 1/2J	650	1433	340	50
	215/45R17 XL	91	Y	7J	615	1356	340	50
	215/50R17 XL	95	Y	7J	690	1521	340	50
	215/55R17	94	Y	7J	670	1477	300	44
	225/45R17 XL	94	Y	7 1/2J	670	1477	340	50
	225/50R17 XL	98	Y	7J	750	1653	340	50
	235/50R17 XL	100	W	7 1/2J	800	1764	340	50
18"	255/45R17 XL	102	W	8 1/2J	850	1874	340	50
	215/45R18 XL	93	W	7J	650	1433	340	50
	225/40R18 XL	92	Y	8J	630	1389	340	50
	225/45R18 XL	95	Y	7 1/2J	690	1521	340	50
	235/45R18 XL	98	W	8J	750	1653	340	50
	245/40R18 XL	97	Y	8 1/2J	730	1609	340	50
19"	275/45R18 XL	107	W	9J	975	2149	340	50
	225/40R19 XL	93	Y	8J	650	1433	340	50
	225/45R19 XL	96	W	7 1/2J	710	1565	340	50
	225/55R19 XL	103	Y	7J	875	1929	340	50
	235/35R19 XL	91	Y	8 1/2J	615	1356	340	50
	235/40R19 XL	96	Y	8 1/2J	710	1565	340	50
	235/50R19 XL	103	Y	7 1/2J	875	1929	340	50
	255/30R19 XL	91	Y	9J	615	1356	340	50
	255/35R19 XL	96	Y	9J	710	1565	340	50
	255/40R19 XL	100	W	9J	800	1764	340	50
	255/45R19 XL	104	W	8 1/2J	900	1984	340	50
20"	275/40R19 XL	105	Y	9 1/2J	925	2039	340	50
	245/45R20 XL	103	W	8J	875	1929	340	50
	255/35R20 XL	97	Y	9J	730	1609	340	50
	255/45R20 XL	105	W	8 1/2J	925	2039	340	50
	265/30R20 XL	94	Y	9 1/2J	670	1477	340	50
	275/35R20 XL	102	Y	9 1/2J	850	1874	340	50
21"	315/35R20 XL	110	W	11J	1060	2337	340	50
	295/35R21 XL	107	W	10 1/2J	975	2149	340	50



PCR-UHP

SPORT G5

► High handling performance



Superior grip and handling performance.

Excellent stability.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16"	205/45R16 XL	87	V	7J	545	1201	340	50
	205/50R16 XL	91	V	6 1/2J	615	1356	340	50
	205/55R16	91	V	6 1/2J	615	1356	300	44
17"	205/40R17 XL	84	W	7 1/2J	500	1102	340	50
	205/45R17 XL	88	W	7J	560	1235	340	50
	215/45R17	87	W	7J	545	1201	300	44





LEAO TIRE

NOVA-FORCE HP¹⁰⁰

HP Tire with Low RR
Performance and Low Noise



Low rolling resistance, energy saving.

Reduce CO₂ emission, advanced
environmental protection.

Perfect wet braking performance, safe and
comfortable.



PCR-HP

NOVA-FORCE HP¹⁰⁰

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
13"	145/70R13	71	T	4.50B	345	761	300	44
	155/70R13	75	T	4.50B	387	853	300	44
	155/80R13	79	T	4.50B	437	963	300	44
	175/70R13	82	T	5.00B	475	1047	300	44
14"	155/65R14	75	H	4 1/2J	387	853	300	44
	155/65R14	75	T	4 1/2J	387	853	300	44
	165/60R14	75	H	5J	387	853	300	44
	165/65R14	79	T	5J	437	963	300	44
	165/65R14	79	H	5J	437	963	300	44
	165/70R14	81	T	5J	462	1019	300	44
	165/70R14 XL	85	T	5J	515	1135	340	50
	175/60R14	79	H	5J	437	963	300	44
	175/65R14	82	H	5J	475	1047	300	44
	175/70R14	84	T	5J	500	1102	300	44
15"	175/70R14 XL	88	T	5J	560	1235	340	50
	145/65R15	72	T	4 1/2J	355	783	300	44
	155/60R15	74	T	4 1/2J	375	827	300	44
	155/65R15	77	T	4 1/2J	412	908	300	44
	165/60R15	77	H	5J	412	908	300	44
	165/60R15	77	T	5J	412	908	300	44
	165/65R15	81	H	5J	462	1019	300	44
	175/55R15	77	T	5 1/2J	412	908	300	44
	175/60R15	81	H	5J	462	1019	300	44
	175/65R15	84	H	5J	500	1102	300	44
16"	175/60R16	82	H	5J	475	1047	300	44

Three Grooves

NOVA-FORCE HP¹⁰⁰

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
14"	185/55R14	80	H	6J	450	992	300	44
	185/60R14	82	H	5 1/2J	475	1047	300	44
	185/65R14	86	H	5 1/2J	530	1168	300	44
	185/70R14	88	T	5 1/2J	560	1235	300	44
	195/60R14	86	H	6J	530	1168	300	44
	195/65R14	89	H	6J	580	1279	300	44
	195/70R14	91	T	6J	615	1356	300	44
15"	205/70R14	94	T	6J	670	1477	300	44
	185/55R15	82	V	6J	475	1047	300	44
	185/60R15 XL	88	H	5 1/2J	560	1235	340	50
	185/65R15	88	H	5 1/2J	560	1235	300	44
	195/50R15	82	V	6J	475	1047	300	44
	195/55R15	85	V	6J	515	1135	300	44
	195/60R15	88	H	6J	560	1235	300	44
	195/65R15	91	H	6J	615	1356	300	44
	205/50R15	86	V	6 1/2J	530	1168	300	44
	205/60R15	91	H	6J	615	1356	300	44
	205/60R15	91	V	6J	615	1356	300	44
	205/65R15	94	H	6J	670	1477	300	44
	205/70R15	96	T	6J	710	1565	300	44
16"	215/60R15	94	H	6 1/2J	670	1477	300	44
	215/65R15 XL	100	H	6 1/2J	800	1764	340	50
	185/50R16	81	V	6J	462	1019	300	44
	185/55R16	83	V	6J	487	1074	300	44
	195/50R16 XL	88	V	6J	560	1235	340	50
	195/55R16	87	V	6J	545	1201	300	44
	195/60R16	89	H	6J	580	1279	300	44
	205/50R16	87	H	6 1/2J	545	1201	300	44
	205/50R16	87	V	6 1/2J	545	1201	300	44
	205/55R16	91	V	6 1/2J	615	1356	300	44
	205/55R16	91	H	6 1/2J	615	1356	300	44
	205/60R16	92	V	6J	630	1389	300	44
	205/65R16	95	H	6J	690	1521	300	44
	215/60R16	95	H	6 1/2J	690	1521	300	44
	215/65R16	98	H	6 1/2J	750	1653	300	44
	225/50R16	92	V	7J	630	1389	300	44
	225/55R16 XL	99	V	7J	775	1709	340	50
	225/55R16 XL	99	H	7J	775	1709	340	50
	225/60R16	98	V	6 1/2J	750	1653	300	44
	235/60R16	100	H	7J	800	1764	300	44
17"	225/70R16	103	H	6 1/2J	875	1929	300	44
	255/70R16 XL	115	H	7 1/2J	1215	2679	340	50
	205/50R17 XL	93	V	6 1/2J	650	1433	340	50
	205/55R17 XL	95	V	6 1/2J	690	1521	340	50
	215/50R17 XL	95	V	7J	690	1521	340	50
	215/55R17	94	V	7J	670	1477	300	44
	215/55R17 XL	98	V	7J	750	1653	340	50
	215/60R17	96	H	6 1/2J	710	1565	300	44
	225/50R17	94	V	7J	670	1477	300	44
	225/50R17 XL	98	V	7J	750	1653	340	50
	225/60R17	99	V	6 1/2J	775	1709	300	44
	225/60R17	99	H	6 1/2J	775	1709	300	44
	225/65R17	102	H	6 1/2J	850	1874	300	44
	235/55R17	99	V	7 1/2J	775	1709	300	44
	235/60R17	102	H	7J	850	1874	300	44

Four Grooves

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE

NOVA-FORCE C/S

Good Handling
and Comfortable Performance



Excellent grip and handling performance.

Comfortable and quiet ride.

Superior wet grip and safety.



SUV-HP/UHP

NOVA-FORCE C/S

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16"	215/70R16	100	H	6 1/2J	800	1764	300	44
	225/65R16	100	H	6 1/2J	800	1764	300	44
	235/60R16	100	H	7J	800	1764	300	44
	235/70R16	106	H	7J	950	2094	300	44
	225/75R16	104	H	6J	900	1984	300	44
	245/70R16 XL	111	H	7J	1090	2403	340	50
	255/70R16	111	H	7 1/2J	1090	2403	300	44
	265/70R16	112	T	8J	1120	2469	300	44
	275/70R16	114	H	8J	1180	2601	300	44
17"	215/55R17 XL	98	V	7J	750	1653	340	55
	215/65R17 XL	103	V	6 1/2J	875	1929	340	50
	225/65R17 XL	106	V	6 1/2J	950	2094	340	50
	235/60R17 XL	106	V	7J	950	2094	340	50
	235/65R17 XL	108	V	7J	1000	2205	340	50
	255/60R17	106	H	7 1/2J	950	2094	300	44
	255/65R17	110	H	7 1/2J	1060	2337	300	44
	265/65R17	112	H	8J	1120	2469	300	44
	275/55R17	109	V	8 1/2J	1030	2271	300	44

NOVA-FORCE C/S

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
18"	215/50R18	92	W	7J	630	1389	300	44
	215/55R18 XL	99	V	7J	775	1709	340	50
	225/50R18 XL	99	W	7J	775	1709	340	50
	225/55R18	98	V	7J	750	1653	300	44
	225/60R18 XL	104	V	6 1/2J	900	1984	340	50
	235/55R18 XL	104	W	7 1/2J	900	1984	340	50
	235/60R18 XL	107	W	7J	975	2149	340	50
	255/55R18 XL	109	Y	8J	1030	2271	340	50
	255/60R18 XL	112	V	7 1/2J	1120	2469	340	50
	265/60R18	110	V	8J	1060	2337	300	44
	275/60R18	113	H	8J	1150	2535	300	44
	285/60R18	116	H	8 1/2J	1250	2756	300	44
19"	205/55R19 XL	97	V	6 1/2J	730	1609	340	50
	235/45R19 XL	99	V	8J	775	1709	340	50
	235/55R19 XL	105	W	7 1/2J	925	2039	340	50
	255/40R19 XL	100	W	9J	800	1764	340	50
	255/45R19 XL	104	W	8 1/2J	900	1984	340	50
	255/50R19 XL	107	W	8J	975	2149	340	50
	255/55R19 XL	111	W	8J	1090	2403	340	50
	265/50R19 XL	110	V	8 1/2J	1060	2337	340	50
20"	195/55R20 XL	95	H	6J	690	1521	340	50
	255/40R20 XL	101	W	9J	825	1819	340	50
	265/45R20 XL	108	Y	9J	1000	2205	340	50
	265/50R20 XL	111	W	8 1/2J	1090	2403	340	50
	275/45R20 XL	110	W	9J	1060	2337	340	50
21"	315/35R20 XL	110	Y	11J	1060	2337	340	50
	245/40R21 XL	100	W	8 1/2J	800	1764	340	50
	255/40R21 XL	102	W	9J	850	1874	340	50
	275/45R21 XL	110	W	9J	1060	2337	340	50

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



VAN

NOVA-FORCE Van



► Commercial tire with high grip performance

Better grip performance.

Low rolling resistance for high energy efficiency.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
12"	5.00R12LT	10PR	88/86	P	3.50B	D 530 S 560	D 1168 S 1235	550	80
	155R12C	8PR	88/86	N	4.50B	D 530 S 560	D 1168 S 1235	450	65
13"	155R13C	8PR	91/89	P	4 1/2J	D 580 S 615	D 1279 S 1356	450	65
	175R13C	8PR	97/95	Q	5.00B	D 690 S 730	D 1521 S 1609	450	65
14"	165/70R14C	6PR	89/87	R	5J	D 545 S 580	D 1201 S 1279	375	54
	175/70R14C	6PR	95/93	T	5J	D 650 S 690	D 1433 S 1521	375	54
	185R14C	8PR	102/100	R	5 1/2J	D 800 S 850	D 1764 S 1874	450	65
	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	D 1984 S 2094	450	65
	205R14C	8PR	109/107	R	6J	D 975 S 1030	D 2149 S 2271	450	65
	215R14C	8PR	112/110	R	6J	D 1060 S 1120	D 2337 S 2469	450	65

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15"	195R15C	8PR	106/104	R	5 1/2J	D 900 S 950	D 1984 S 2094	450	65
	195/70R15C	8PR	104/102	R	6J	D 850 S 900	D 1874 S 1984	450	65
	205/70R15C	8PR	106/104	S	6J	D 900 S 950	D 1984 S 2094	450	65
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2149 S 2271	450	65
	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2337 S 2469	450	65
	255/70R15C	6PR	112/110	S	7 1/2J	D 1060 S 1120	D 2337 S 2469	375	54
16"	185/75R16C	8PR	104/102	R	5J	D 850 S 900	D 1874 S 1984	475	69
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	D 2039 S 2149	475	69
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	D 2205 S 2337	475	69
	215/70R16C	6PR	108/106	T	6 1/2J	D 950 S 1000	D 2094 S 2205	375	54
	215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	D 2403 S 2535	475	69
	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	D 3086 S 3197	575	83



LEAO TIRE



VAN

NOVA-FORCE Van^{HP}



► Commercial tire with high grip performance

Excellent stability.

Great grip performance and driving force of turning.

Low rolling resistance for higher energy efficiency.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
14"	175/65R14C	6PR	90/88	T	5J	D 560 S 600	D 1235 S 1323	375	54
	215/65R15C	6PR	104/102	T	6 1/2J	D 850 S 900	D 1874 S 1984	375	54
16"	195/65R16C	8PR	104/102	R	6J	D 850 S 900	D 1874 S 1984	475	69
	205/65R16C	8PR	107/105	R	6J	D 925 S 975	D 2039 S 2149	475	69
	215/60R16C	6PR	103/101	T	6 1/2J	D 825 S 875	D 1819 S 1929	375	54
	215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2149 S 2271	475	69
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2337 S 2469	475	69
	235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	D 2535 S 2679	475	69



VAN-High load

NOVA-FORCE Van^{PLUS}



► High wear performance

Excellent grip and handling performance.

Better grip performance on slippery road together with high safety coefficient.

Suitable for commercial vehicles.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
14"	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	D 1984 S 2094	450	65
	205/70R15C	8PR	106/104	S	6J	D 900 S 950	D 1984 S 2094	450	65
15"	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2149 S 2271	450	65



SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



ALL SEASON ALL WEATHER TIRE



**LION
SPORT 3**

GOOD HANDLING AND EXCELLENT
GRIP PERFORMANCE

P33



**iGREEN
All Season**

ALL SEASON TIRE

P49



**LION
SPORT A/T¹⁰⁰**

LOW NOISE
ALL-WEATHER TIRE

P51



SUMMER TIRE

All Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE

LION SPORT³

Good handling and excellent grip performance



Asymmetric tread pattern design for better handling performance.

Excellent drainage performance to effectively reduce risk of hydroplaning.



PCR-UHP

LION SPORT³

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16"	195/45R16 XL	84	V	6 1/2J	500	1102	340	50
	205/50R16 XL	91	W	6 1/2J	615	1356	340	50
	205/55R16 XL	94	W	6 1/2J	670	1477	340	50
	215/55R16 XL	97	W	7J	730	1609	340	50
	225/50R16 XL	96	V	7J	710	1565	340	50
17"	205/40R17 XL	84	W	7 1/2J	500	1102	340	50
	205/45R17 XL	88	W	7J	560	1235	340	50
	205/50R17 XL	93	W	6 1/2J	650	1433	340	50
	215/40R17 XL	87	W	7 1/2J	545	1201	340	50
	215/45R17 XL	91	W	7J	615	1356	340	50
	215/55R17 XL	98	W	7J	750	1653	340	50
	225/45R17 XL	94	W	7 1/2J	670	1477	340	50
	225/50R17 XL	98	W	7J	750	1653	340	50
	235/45R17 XL	97	W	8J	730	1609	340	50
	245/40R17 XL	95	W	8 1/2J	690	1521	340	50
18"	245/45R17 XL	99	W	8J	775	1709	340	50
	215/35R18 XL	84	W	7 1/2J	500	1102	340	50
	215/40R18 XL	89	Y	7 1/2J	580	1279	340	50
	225/40R18 XL	92	Y	8J	630	1389	340	50
	225/45R18 XL	95	W	7 1/2J	690	1521	340	50
	225/50R18	95	V	7J	690	1521	300	44
	235/40R18 XL	95	W	8 1/2J	690	1521	340	50
	235/45R18 XL	98	Y	8J	750	1653	340	50
	235/50R18 XL	101	W	7 1/2J	825	1819	340	50
	245/40R18 XL	97	W	8 1/2J	730	1609	340	50

LION SPORT³

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
18"	245/45R18 XL	100	W	8J	800	1765	340	50
	255/40R18 XL	99	Y	9J	775	1709	340	50
	255/45R18 XL	103	W	8 1/2J	875	1929	340	50
	265/35R18 XL	97	W	9 1/2J	730	1609	340	50
	275/40R18 XL	103	Y	9 1/2J	875	1929	340	50
19"	225/35R19 XL	88	W	8J	560	1235	340	50
	235/35R19 XL	91	W	8 1/2J	615	1356	340	50
	235/40R19 XL	96	Y	8 1/2J	710	1565	340	50
	235/55R19 XL	105	W	7 1/2J	925	2039	340	50
	245/40R19 XL	98	W	8 1/2J	750	1653	340	50
	245/45R19 XL	102	W	8J	850	1874	340	50
	255/35R19 XL	96	W	9J	710	1565	340	50
	255/40R19 XL	100	Y	9J	800	1764	340	50
	255/45R19 XL	104	Y	8 1/2J	900	1984	340	50
	275/30R19 XL	96	W	9 1/2J	710	1565	340	50
	275/35R19 XL	100	Y	9 1/2J	800	1764	340	50
	275/40R19 XL	105	Y	9 1/2J	925	2039	340	50
20"	225/35R20 XL	90	W	8J	600	1323	340	50
	235/30R20 XL	88	Y	8 1/2J	560	1235	340	50
	235/45R20 XL	100	W	8J	800	1764	340	50
	245/35R20 XL	95	W	8 1/2J	690	1521	340	50
	245/40R20 XL	99	Y	8 1/2J	775	1709	340	50
	245/45R20 XL	103	W	8J	875	1929	340	50
	245/50R20	102	V	7 1/2J	850	1874	300	44
	255/35R20 XL	97	W	9J	730	1609	340	50
	255/45R20 XL	105	Y	8 1/2J	925	2039	340	50
	275/30R20 XL	97	Y	9 1/2J	730	1609	340	50
	275/35R20 XL	102	Y	9 1/2J	850	1874	340	50
	275/40R20 XL	106	W	9 1/2J	950	2094	340	50
	275/45R20 XL	110	V	9J	1060	2337	340	50
	275/55R20 XL	117	W	8 1/2J	1285	2833	340	50
	285/30R20 XL	99	W	10J	775	1709	340	50
	315/35R20 XL	110	W	11J	1060	2337	340	50
22"	235/30R22 XL	90	W	8 1/2J	600	1323	340	50
	245/30R22 XL	92	W	8 1/2J	630	1389	340	50
	255/30R22 XL	95	V	9J	690	1521	340	50
	265/35R22 XL	102	W	9 1/2J	850	1874	340	50
	265/30R22 XL	97	W	9 1/2J	730	1609	340	50
	265/40R22 XL	106	V	9 1/2J	950	2094	340	50
	285/35R22 XL	106	W	10J	950	2094	340	50
	285/40R22 XL	110	V	10J	1060	2337	340	50
	285/45R22 XL	114	V	9 1/2J	1180	2601	340	50
	295/25R22 XL	97	W	10 1/2J	730	1609	340	50
24"	305/25R22 XL	99	Y	11J	775	1709	340	50
	305/40R22 XL	114	V	11J	1180	2601	340	50
	305/45R22 XL	118	V	10J	1320	2910	340	50
	255/30R24 XL	97	W	9J	730	1609	340	50
	275/25R24 XL	96	W	10J	710	1565	340	50
26"	295/35R24 XL	110	V	10 1/2J	1060	2337	340	50
	305/35R24 XL	112	V	11J	1120	2469	340	50
	275/25R26 XL	98	W	10J	750	1653	340	50
	295/30R26 XL	107	W	10 1/2J	975	2149	340	50
28"	305/30R26 XL	109	W	11J	1030	2271	340	50
	295/25R28 XL	103	V	10 1/2J	875	1929	340	50
	275/25R28 XL	99	W	10J	775	1709	340	50
30"	275/25R30 XL	101	W	10J	825	1819	340	50

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



PCR-HP

LION SPORT HP³



► HP Tire with Good Handling and ride Performance

Good straight driving stability.

More comfortable and quiet ride.

Improved drainage performance to effectively reduce risk of hydroplaning.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
12"	175/70R12	80	H	5.00B	450	992	300	44
13"	185/60R13	80	H	5.50B	450	992	300	44
14"	175/65R14	82	H	5J	475	1047	300	44
	185/60R14	82	H	5 1/2J	475	1047	300	44
	185/65R14	86	H	5 1/2J	530	1168	300	44
	185/70R14	88	H	5 1/2J	560	1235	300	44
	195/70R14	91	H	6J	615	1356	300	44
15"	185/60R15	84	H	5 1/2J	500	1102	300	44
	185/65R15	88	H	5 1/2J	560	1235	300	44
	195/50R15 XL	86	V	6J	530	1168	340	50
	195/55R15	85	V	6J	515	1135	300	44
	195/65R15	91	H	6J	615	1356	300	44
	205/65R15	94	H	6J	670	1477	300	44
	215/60R15	94	H	6 1/2J	670	1477	300	44
	215/65R15 XL	100	H	6 1/2J	800	1764	340	50
16"	225/70R15	100	T	6 1/2J	800	1764	300	44
	195/55R16	87	V	6J	545	1201	300	44
	205/55R16	91	H	6 1/2J	615	1356	300	44
	205/60R16	92	H	6J	630	1389	300	44
	205/65R16	95	H	6J	690	1521	300	44
	215/60R16	95	H	6 1/2J	690	1521	300	44
	215/65R16	98	H	6 1/2J	750	1653	300	44
	225/55R16	95	V	7J	690	1521	300	44
	225/60R16	98	H	6 1/2J	750	1653	300	44
	225/65R16	100	H	6 1/2J	800	1764	300	44
	225/70R16 XL	107	H	6 1/2J	975	2149	340	50
	235/60R16	100	H	7J	800	1764	300	44
	235/65R16	103	H	7J	875	1929	300	44
17"	215/50R17 XL	95	V	7J	690	1521	340	50
	215/55R17	94	V	7J	670	1477	300	44
	215/60R17	96	H	6 1/2J	710	1565	300	44
	215/65R17	99	H	6 1/2J	775	1709	300	44
	225/55R17	97	H	7J	730	1609	300	44
	225/60R17	99	H	6 1/2J	775	1709	300	44
	225/65R17	102	H	6 1/2J	850	1874	300	44
	235/55R17	99	H	7 1/2J	775	1709	300	44
	235/60R17	102	H	7J	850	1874	300	44
	235/65R17	104	H	7J	900	1984	300	44
18"	225/55R18	98	H	7J	750	1653	300	44
	235/65R18	106	H	7J	950	2094	300	44



PCR-ECO

LION SPORT GP



► Super Wear Resistance

Ultra mileage tire.

Low noise.

Improved water evacuation.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
12"	175/70R12	80	H	5.00B	450	992	300	44
13"	165/60R13	73	T	5.00B	365	805	300	44
	175/70R13	82	T	5.00B	475	1047	300	44
	185/70R13	86	T	5.50B	530	1168	300	44
14"	175/65R14	82	T	5J	475	1047	300	44
	185/65R14	86	T	5 1/2J	530	1168	300	44
	185/70R14	88	T	5 1/2J	560	1235	300	44
	195/70R14	91	T	6J	615	1356	300	44
	185/65R15	88	T	5 1/2J	560	1235	300	44
15"	195/50R15	82	H	6J	475	1047	300	44
	195/60R15	88	H	6J	560	1235	300	44
	195/65R15	91	H	6J	615	1356	300	44
	205/60R15	91	H	6J	615	1356	300	44
	205/65R15	94	H	6J	670	1477	300	44
	205/70R15	96	T	6J	710	1565	300	44
	205/75R15	97	S	5 1/2J	730	1609	300	44
	215/70R15	98	T	6 1/2J	750	1653	300	44
	215/75R15	100	S	6J	800	1765	300	44
	225/70R15	100	T	6 1/2J	800	1764	300	44
	225/75R15	102	S	6J	850	1874	300	44
	235/75R15	105	S	6 1/2J	925	2039	300	44
16"	205/55R16	91	H	6 1/2J	615	1356	300	44
	205/60R16	92	H	6J	630	1389	300	44
	205/65R16	95	H	6J	690	1521	300	44
	215/60R16	95	H	6 1/2J	690	1521	300	44
	215/65R16	98	H	6 1/2J	750	1653	300	44
	215/70R16	100	T	6 1/2J	800	1764	300	44
	225/60R16	98	H	6 1/2J	750	1653	300	44
	225/65R16	100	H	6 1/2J	800	1764	300	44
	225/70R16 XL	107	H	6 1/2J	975	2149	340	50
	235/70R16	106	H	7J	950	2094	300	44
	245/70R16	107	H	7J	975	2149	300	44
	245/75R16	111	H	7J	1090	2403	300	44
	255/70R16	111	S	7 1/2J	1090	2403	300	44
	265/70R16	112	S	8J	1120	2469	300	44
	265/75R16	116	T	7 1/2J	1250	2756	300	44



LEAO TIRE



SUV-HP/UHP

LION SPORT 4X4^{HP3}



► Comfortable Ride Lower Noise

Four circumferential grooves help channel water to resist hydroplaning and help maintain wet traction.

Outside shoulders design aid steering response while inside design increase traction in wet and wintry conditions.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15"	235/70R15 XL	106	H	7J	950	2094	340	50
	205/70R16	97	V	6J	730	1609	300	44
16"	215/65R16 XL	102	H	6 1/2J	850	1874	340	50
	215/70R16	100	H	6 1/2J	800	1764	300	44
	225/75R16	104	H	6J	900	1984	300	44
	235/70R16	106	H	7J	950	2094	300	44
	245/70R16 XL	111	H	7J	1090	2403	340	50
	265/70R16	112	H	8J	1120	2469	300	44
	275/70R16	114	H	8J	1180	2601	300	44
	225/55R17 XL	101	V	7J	825	1819	340	50
17"	225/60R17	99	H	6 1/2J	775	1709	300	44
	225/65R17	102	H	6 1/2J	850	1874	300	44
	235/55R17 XL	103	W	7 1/2J	875	1929	340	50
	235/60R17 XL	106	V	7J	950	2094	340	50
	235/65R17 XL	108	V	7J	1000	2205	340	50
	235/70R17 XL	109	T	7J	1030	2271	340	50
	245/65R17 XL	111	H	7J	1090	2403	340	50
	255/60R17	106	H	7 1/2J	950	2094	300	44
	255/65R17	110	H	7 1/2J	1060	2337	300	44
	255/70R17	112	T	7 1/2J	1120	2469	300	44
	265/65R17	112	H	8J	1120	2469	300	44
	225/60R18	100	H	6 1/2J	800	1764	300	44
18"	235/55R18 XL	104	V	7 1/2J	900	1984	340	50
	235/60R18 XL	107	W	7J	975	2149	340	50
	235/65R18	106	H	7J	950	2094	340	50
	245/60R18	105	V	7J	925	2039	300	44
	255/55R18 XL	109	V	8J	1030	2271	340	50
	255/60R18 XL	112	V	7 1/2J	1120	2469	340	50
	255/65R18	111	H	7 1/2J	1090	2403	300	44
	255/70R18	113	T	7 1/2J	1150	2535	300	44
	265/60R18	110	H	8J	1060	2337	300	44
	265/65R18	114	H	8J	1180	2601	300	44
	265/70R18	116	T	8J	1250	2756	300	44
	275/65R18	116	H	8J	1250	2756	300	44
	245/55R19	103	V	7 1/2J	875	1929	300	44
	255/50R19 XL	107	W	8J	975	2149	340	50
19"	255/55R19 XL	111	V	8J	1090	2403	340	50
	255/60R19	109	H	7 1/2J	1030	2271	300	44
20"	245/50R20	102	V	7 1/2J	850	1874	300	44
	255/50R20 XL	109	V	8J	1030	2271	340	50
	265/50R20 XL	111	V	8 1/2J	1090	2403	340	50
	275/60R20	115	T	8J	1215	2679	300	44



SUV-HP/UHP

LA35



► Comfortable Ride Lower Noise

Four circumferential grooves help channel water to resist hydroplaning and help maintain wet traction.

Outside shoulders design aid steering response while inside design increase traction in wet and wintry conditions.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15"	235/70R15 XL	106	H	7J	950	2094	340	50
	205/70R16	97	V	6J	730	1609	300	44
16"	215/65R16 XL	102	H	6 1/2J	850	1874	340	50
	215/70R16	100	H	6 1/2J	800	1764	300	44
	225/75R16	104	H	6J	900	1984	300	44
	235/70R16	106	H	7J	950	2094	300	44
	245/70R16 XL	111	H	7J	1090	2403	340	50
	265/70R16	112	H	8J	1120	2469	300	44
	275/70R16	114	H	8J	1180	2601	300	44
	225/55R17 XL	101	V	7J	825	1819	340	50
17"	225/60R17	99	H	6 1/2J	775	1709	300	44
	225/65R17	102	H	6 1/2J	850	1874	300	44
	235/55R17 XL	103	W	7 1/2J	875	1929	340	50
	235/60R17 XL	106	V	7J	950	2094	340	50
	235/65R17 XL	108	V	7J	1000	2205	340	50
	235/70R17 XL	109	T	7J	1030	2271	340	50
	245/65R17 XL	111	H	7J	1090	2403	340	50
	255/60R17	106	H	7 1/2J	950	2094	300	44
	255/65R17	110	H	7 1/2J	1060	2337	300	44
	255/70R17	112	T	7 1/2J	1120	2469	300	44
	265/65R17	112	H	8J	1120	2469	300	44
	225/60R18	100	H	6 1/2J	800	1764	300	44
18"	235/55R18 XL	104	V	7 1/2J	900	1984	340	50
	235/60R18 XL	107	W	7J	975	2149	340	50
	235/65R18	106	H	7J	950	2094	340	50
	245/60R18	105	V	7J	925	2039	300	44
	255/55R18 XL	109	V	8J	1030	2271	340	50
	255/60R18 XL	112	V	7 1/2J	1120	2469	340	50
	255/65R18	111	H	7 1/2J	1090	2403	300	44
	255/70R18	113	T	7 1/2J	1150	2535	300	44
	265/60R18	110	H	8J	1060	2337	300	44
	265/65R18	114	H	8J	1180	2601	300	44
	265/70R18	116	T	8J	1250	2756	300	44
	275/65R18	116	H	8J	1250	2756	300	44
	245/55R19	103	V	7 1/2J	875	1929	300	44
	255/50R19 XL	107	W	8J	975	2149	340	50
19"	255/55R19 XL	111	V	8J	1090	2403	340	50
	255/60R19	109	H	7 1/2J	1030	2271	300	44
20"	245/50R20	102	V	7 1/2J	850	1874	300	44
	255/50R20 XL	109	V	8J	1030	2271	340	50
	265/50R20 XL	111	V	8 1/2J	1090	2403	340	50
	275/60R20	115	T	8J	1215	2679	300	44



LEAO TIRE



CROSS-COUNTRY-HT

LION SPORT H/T



► SUV Tire for Urban Road Use, with Low Noise and Good Dry/wet Performance

High drainage capability.

High comfort and low noise.

Excellent handling performance.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15"	235/75R15 XL	-	109	T	6 1/2J	1030	2271	340	50
	255/70R15	-	108	T	7 1/2J	1000	2205	300	44
	265/70R15	-	112	T	8J	1120	2469	300	44
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	2270	350	50
16"	215/70R16	-	100	T	6 1/2J	800	1764	300	44
	225/70R16 XL	-	107	T	6 1/2J	975	2149	340	50
	235/70R16 XL	-	109	T	7J	1030	2271	340	50
	245/70R16	-	107	T	7J	975	2149	300	44
	245/70R16 XL	-	111	T	7J	1090	2403	340	50
	245/75R16	-	111	T	7J	1090	2403	300	44
	255/70R16	-	111	T	7 1/2J	1090	2403	300	44
	265/70R16	-	112	T	8J	1120	2469	300	44
	265/75R16	-	116	T	7 1/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT245/75R16	10PR	120/116	R	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT235/85R16	10PR	120/116	R	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
17"	235/65R17	-	104	T	7J	900	1984	300	44
	245/65R17	-	107	T	7J	975	2149	300	44
	245/70R17	-	110	T	7J	1060	2337	300	44
	265/65R17	-	112	H	8J	1120	2469	300	44
	265/70R17	-	115	T	8J	1215	2679	300	44
	275/65R17 XL	-	119	H	8J	1360	3000	340	50
	285/65R17	-	116	S	8 1/2J	1250	2756	300	44
	LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
18"	LT265/70R18	10PR	124/121	R	8J	D 1450 S 1600	D 3195 S 3525	550	80
20"	275/55R20 XL	-	117	V	8 1/2J	1285	2833	340	50
	265/50R20 XL	-	111	V	8 1/2J	1090	2403	340	50
	265/50R20 XL	-	112	V	8 1/2J	1120	2469	340	50



CROSS-COUNTRY-AT

LION SPORT A/T



► All Terrain Tire with High Wear Resistance

Excellent wet performance.

Large angle grooves to improve self-cleaning ability.

An optimal balance between performance on road and off road.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15"	235/75R15 XL	-	109	T	6 1/2J	1030	2271	340	50
	235/75R15 XL	-	109	Q	6 1/2J	1030	2271	340	50
	265/70R15 OWL	-	112	T	8J	1120	2469	300	44
	265/70R15 OWL	-	112	Q	8J	1120	2469	300	44
	LT215/75R15	6PR	100/97	S	6J	D 730 S 800	D 1610 S 1765	350	50
	LT235/75R15	6PR	104/101	R	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
	LT235/75R15	6PR	104/101	Q	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
	30X9.50R15LT	6PR	104	S	7 1/2J	900	1985	350	51
	30X9.50R15LT	6PR	104	Q	7 1/2J	900	1985	350	51
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	2270	350	51
16"	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	2270	350	51
	235/70R16	-	106	T	7J	950	2094	300	44
	235/70R16	-	106	Q	7J	950	2094	300	44
	245/70R16 XL	-	111	T	7J	1090	2403	340	50
	245/70R16 XL	-	111	Q	7J	1090	2403	340	50
	245/75R16	-	111	T	7J	1090	2403	300	44
	255/70R16	-	111	S	7 1/2J	1090	2403	300	44
	265/70R16	-	112	T	8J	1120	2469	300	44
	265/70R16	-	112	Q	8J	1120	2469	300	44
	265/75R16	-	116	T	7 1/2J	1250	2756	300	44
	205R16LT	8PR	110/108	T	6J	D 1000 S 1060	D 2205 S 2337	450	65
	205R16LT	8PR	110/108	Q	6J	D 1000 S 1060	D 2205 S 2337	450	65
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT235/85R16	10PR	120/116	Q	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16 OWL	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16	8PR	119/116	Q	7 1/2J	D 1250 S 1360	D 2755 S 3000	450	65
	LT265/75R16 OWL	8PR	119/116	Q	7 1/2J	D 1250 S 1360	D 2755 S 3000	450	65
	LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80

SUMMER TIRE

ALL SEASON (M+S) TIRE

4S (3PM5F) TIRE

WINTER/SNOW TIRE

WINTER/ICE TIRE

WINTER/STUD TIRE



LEAO TIRE

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16"	LT285/75R16	6PR	116/113	Q	8J	D 1150 S 1250	D 2535 S 2755	350	51
	LT285/75R16	10PR	126/123	R	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16	10PR	124/121	R	9J	D 1450 S 1600	D 3195 S 3525	450	65
17"	245/65R17 XL	-	111	T	7J	1090	2403	340	50
	245/65R17 XL	-	111	Q	7J	1090	2403	340	50
	245/70R17	-	110	S	7J	1060	2337	300	44
	265/65R17	-	112	T	8J	1120	2469	300	44
	265/70R17	-	115	T	8J	1215	2679	300	44
	265/70R17	-	115	Q	8J	1215	2679	300	44
	P285/70R17	-	117	T	8 1/2J	1285	2833	300	44
	LT235/80R17	10PR	120/117	R	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT235/80R17	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/70R17	10PR	119/116	Q	7J	D 1250 S 1360	D 2755 S 3000	550	80
	LT245/75R17	10PR	121/118	R	7J	D 1320 S 1450	D 2910 S 3195	550	80
	LT245/75R17	10PR	121/118	Q	7J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17	8PR	121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT285/70R17	8PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT285/70R17	10PR	121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT305/70R17	8PR	119/116	R	9J	D 1250 S 1360	D 2755 S 3000	350	50
18"	255/70R18	-	113	S	7 1/2J	1150	2535	300	44
	265/60R18	-	110	T	8J	1060	2337	300	44
	265/70R18	-	116	T	8J	1250	2756	300	44
	275/65R18	-	116	T	8J	1250	2756	300	44
	LT265/65R18	10PR	122/119	Q	8J	D 1360 S 1500	D 3000 S 3305	550	80
	LT265/70R18	10PR	124/121	S	8J	D 1450 S 1600	D 3195 S 3525	550	80
	LT275/65R18	10PR	123/120	S	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/70R18	10PR	125/122	S	8J	D 1500 S 1650	D 3305 S 3640	550	80
20"	LT305/60R18	10PR	121/118	R	9J	D 1320 S 1450	D 2910 S 3195	450	65
	275/55R20	-	113	S	8 1/2J	1150	2535	300	44
	275/60R20	-	115	T	8J	1215	2679	300	44
	LT265/60R20	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/60R20	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT275/55R20	10PR	120/117	Q	8 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT275/60R20	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/65R20	10PR	126/123	S	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT285/55R20	10PR	122/119	S	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R20	10PR	127/124	S	8 1/2J	D 1600 S 1750	D 3525 S 3860	550	80
	LT305/55R20	10PR	121/118	R	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	35X12.50R20LT	10PR	121	Q	10J	1450	3195	450	65



CROSS-COUNTRY-XT

LION SPORT X/T COMING SOON



Wide lateral grooves with stone ejectors resist stone drilling.

Specially developed tread compound improves the resistance against cuts, chips and punctures in tough terrain.

The aggressive 3D sidewall design delivers extra sidewall protection in tough terrain especially with gravels and rocks, thus increases the adaptability on different types of roads.

Application of rim protector brings more safeguard from accidental curb damage.



CROSS-COUNTRY-RT

LION SPORT R/T COMING SOON



Diagonal symmetric blocks with biting edges quickly cut into mud and snow, thus deliver high traction in rugged terrain.

Wide tread design increases contact patch on road surfaces, provides excellent grip and off-road traction.

High strength carcass protects tread and sidewall from impacts and punctures in rough terrain and improves treadwear throughout the tire life.

Interlocked tread blocks with advanced compound and zigzag siping design bring excellent grip in snowy off-road conditions.

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



CROSS-COUNTRY-MT

LION SPORT M/T

► Mud-terrain Tire

- High floatation.
- Higher load-carrying capacity.
- Excellent self-cleaning performance.
- Aggressive tread pattern and sidewall design.



Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15"	265/70R15 OWL	-	112	T	8J	1120	2469	300	44
	265/75R15 OWL	-	112	Q	7 1/2J	1120	2469	300	44
	30X9.50R15LT OWL	6PR	104	Q	7 1/2J	900	1985	350	51
	31X10.50R15LT OWL	6PR	109	Q	8 1/2J	1030	2270	350	51
	33X12.50R15LT OWL	6PR	108	Q	10J	1000	2205	250	36
	35X12.50R15LT	6PR	113	Q	10J	1150	2535	250	35
	LT215/75R15 OWL	6PR	100/97	Q	6J	D 730 S 800	D 1610 S 1765	350	51
16"	LT235/75R15 OWL	6PR	104/101	Q	6 1/2J	D 825 S 900	D 1820 S 1985	350	51
	205R16LT OWL	8PR	110/108	Q	6J	D 1000 S 1060	D 2205 S 2337	450	65
	LT225/75R16 OWL	8PR	110/107	Q	6J	D 975 S 1060	D 2150 S 2335	450	65
	LT235/85R16 OWL	10PR	120/116	Q	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16 OWL	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT255/70R16 OWL	8PR	115/112	Q	7 1/2J	D 1120 S 1215	D 2470 S 2680	450	65
	LT265/70R16 OWL	6PR	110/107	Q	8J	D 975 S 1060	D 2150 S 2335	350	51
	LT265/75R16 OWL	8PR	119/116	Q	7 1/2J	D 1250 S 1360	D 2755 S 3000	450	65
	LT265/75R16 OWL	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16 OWL	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16 OWL	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65
	LT315/75R16 OWL	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65
	LT375/65R16	8PR	126/123	Q	11J	D 1550 S 1700	D 3415 S 3750	350	50
17"	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	35X12.50R17LT OWL	10PR	121	Q	10J	1450	3195	450	65
	37X12.50R17LT	8PR	124	Q	10J	1600	3525	350	50
	37X13.50R17LT	10PR	121	Q	11J	1450	3195	450	65
	40X13.50R17LT	6PR	121	Q	11J	1450	3195	250	35
	LT235/80R17 OWL	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/65R17 OWL	10PR	120/117	Q	8J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/70R17 OWL	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17 OWL	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT295/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17"	LT305/65R17	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R17 OWL	8PR	119/116	Q	9J	D 1250 S 1360	D 2755 S 3000	350	51
	LT315/70R17	10PR	121/118	Q	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
18"	33X12.50R18LT OWL	10PR	118	Q	10J	1320	2910	450	65
	33X12.50R18LT OWL	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT OWL	10PR	123	Q	10J	1550	3415	450	65
	35X12.50R18LT OWL	12PR	128	Q	10J	1800	3970	550	80
	37X13.50R18LT	8PR	124	Q	11J	1600	3525	350	50
	LT265/60R18 OWL	10PR	119/116	Q	8J	D 1250 S 1360	D 2755 S 3000	550	80
	LT275/70R18	8PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	450	65
	LT275/70R18 OWL	10PR	125/122	Q	8J	D 1500 S 1650	D 3305 S 3640	550	80
	LT295/70R18	10PR	129/126	Q	8 1/2J	D 1700 S 1850	D 3750 S 4080	550	80
	LT305/60R18	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R18	10PR	126/123	Q	9J	D 1550 S 1700	D 3415 S 3750	450	65
20"	33X12.50R20LT OWL	10PR	114	Q	10J	1180	2600	450	65
	33X12.50R20LT OWL	12PR	119	Q	10J	1360	3000	550	80
	36X15.50R20LT	10PR	126	Q	12 1/2J	1700	3750	450	65
	37X13.50R20LT	10PR	127	Q	11J	1750	3860	450	65
	35X12.50R20LT OWL	10PR	121	Q	10J	1450	3195	450	65
	35X12.50R20LT OWL	12PR	125	Q	10J	1650	3640	550	80
	38X15.50R20LT OWL	8PR	125	Q	12 1/2J	1650	3640	350	51
	40X14.50R20LT	8PR	128	Q	11 1/2J	1800	3970	350	50
	LT285/55R20 OWL	10PR	122/119	Q	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R20 OWL	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	550	80
22"	LT295/60R20	10PR	126/123	Q	8 1/2J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/55R20	10PR	121/118	Q	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	33X12.50R22LT	10PR	109	Q	10J	1030	2270	450	65
	33X12.50R22LT	12PR	114	Q	10J	1180	2600	550	80
	35X12.50R22LT OWL	10PR	117	Q	10J	1285	2835	450	65
	35X12.50R22LT OWL	12PR	121	Q	10J	1450	3195	550	80
24"	37X13.50R22LT	10PR	123	Q	11J	1550	3415	450	65
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
	37X13.50R24LT	10PR	120	Q	11J	1400	3085	450	65
26"	37X13.50R26LT	10PR	114	Q	11J	1180	2600	450	65

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



CROSS-COUNTRY-AT

LION SPORT AT-2



► All Terrain Tire with High Wear Resistance

Professional off-road tires.

High-strength sidewall for puncture resistance.

The groove bottom divider and anti-pinch rocks design provide excellent self-cleaning performance.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15"	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	2270	350	51
16"	245/70R16 XL	-	116	Q	8J	1250	2756	340	50
	265/70R16 XL	-	111	Q	7J	1090	2403	340	50
17"	265/65R17 XL	-	116	Q	8J	1250	2756	340	50
18"	265/60R18 XL	-	114	Q	8J	1180	2601	340	50
20"	265/50R20	-	111	Q	8 1/2J	1090	2403	340	50



VAN

RADIAL666



► Commercial tire with Excellent wear and wet performance

Excellent traction.

Excellent wet braking.

High wear resistance.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
12"	145R12LT	8PR	86/84	Q	4J	D 500 S 530	D 1100 S 1170	450	65
	155R12C	6PR	83/81	N	4.50B	D 462 S 487	D 1019 S 1074	350	51
	155R12C	8PR	88/86	N	4.50B	D 530 S 560	D 1170 S 1235	450	65
13"	175R13LT	8PR	97/95	Q	5.00B	D 690 S 730	D 1521 S 1609	450	65
14"	165/70R14C	6PR	89/87	R	5J	D 545 S 580	D 1201 S 1279	375	54
	185R14C	8PR	102/100	R	5 1/2J	D 800 S 850	D 1764 S 1874	450	65
	185R14LT	8PR	102/100	R	5 1/2J	D 800 S 850	D 1764 S 1874	450	65
	195R14C	8PR	106/104	P	5 1/2J	D 875 S 925	D 1929 S 2039	450	65
	195/75R14C	8PR	106/104	R	5 1/2J	D 900 S 950	D 1984 S 2094	475	69
	205/75R14C	8PR	109/107	R	5 1/2J	D 975 S 1030	D 2149 S 2271	475	69
	215R14C	8PR	110/108	R	6J	D 1000 S 1060	D 2205 S 2337	450	65
	215/75R14C	8PR	112/110	R	6J	D 1060 S 1120	D 2337 S 2469	475	69
15"	195R15C	8PR	106/104	R	5 1/2J	D 900 S 950	D 1985 S 2095	450	65
	195/70R15C	10PR	104/102	R	6J	D 850 S 900	D 1874 S 1984	550	80
	205/70R15C	8PR	106/104	S	6J	D 900 S 950	D 1984 S 2094	450	65
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2149 S 2271	450	65
	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2337 S 2469	450	65
16"	175/75R16C	8PR	101/99	R	5J	D 775 S 825	D 1709 S 1819	475	69
	185/75R16C	8PR	104/102	R	5J	D 850 S 900	D 1874 S 1984	475	69
	195/65R16C	8PR	104/102	R	6J	D 850 S 900	D 1874 S 1984	475	69
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	D 2039 S 2149	475	69
	205/65R16C	8PR	107/105	R	6J	D 925 S 975	D 2039 S 2149	475	69
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	D 2205 S 2337	475	69
	215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2149 S 2271	475	69
	215/70R16C	6PR	108/106	S	6 1/2J	D 950 S 1000	D 2094 S 2205	375	54
	215/75R16C	8PR	107/104	R	6J	D 900 S 975	D 1984 S 2149	450	65
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2337 S 2469	475	69
	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	D 3086 S 3197	575	83
	235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	D 2535 S 2679	475	69

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PM5F) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



ST-TRAILER

RADIAL R701



Low fuel consumption.

Budget Tires.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
10"	195/55R10C	-	98/96	N	6J	D 710 S 750	D 1565 S 1655	625	91
	155/70R12	-	73	S	4.50B	365	805	250	36
	155/70R12C	-	104/102	N	4 1/2J	D 850 S 900	D 1875 S 1985	625	90
12"	185/60R12C	-	104/101	N	5 1/2J	D 825 S 900	D 1820 S 1985	650	94
	195/60R12C	-	104/102	N	6J	D 850 S 900	D 1875 S 1985	650	94
	175/70R13	-	82	H	5.00B	475	1047	250	36
13"	185/70R13	-	86	N	5 1/2J	530	1168	250	36
	165R13C	8PR	96/94	N	4 1/2J	D 670 S 710	D 1475 S 1565	450	65
	185/70R13C	-	106/104	N	5 1/2J	D 900 S 950	D 1984 S 2094	600	87
	195/50R13C	-	104/101	N	6J	D 825 S 900	D 1820 S 1985	650	94
	165/55R14	-	72	H	5J	355	783	250	36
14"	175/65R14	-	82	H	5J	475	1047	250	36
	185/60R14	-	82	H	5 1/2J	475	1047	250	36
	185R14C	-	104/102	N	5 1/2J	D 850 S 900	D 1875 S 1985	500	73
	195/55R15	-	85	H	6J	515	1135	250	36
15"	195/60R15	-	88	H	6J	560	1235	250	36



VAN

EXC100



► For all season commercial

Optimization tread pattern stiffness distribution, The tire have good wet&ice road grip performance.

Application of spring hole, product with Excellent appearance.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16"	185/75R16C	8PR	104/102	R	5J	D 850 S 900	D 1875 S 1985	475	69



ST

LA R781



Low fuel consumption.

Specially designed for trailer.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load	
						kg	lbs
13"	ST175/80R13	6PR	91/87	M	5J	D 545 S 615	D 1200 S 1360
	ST205/75R14	6PR	100/96	M	5 1/2J	D 710 S 800	D 1570 S 1760
14"	ST205/75R14	8PR	105/101	M	5 1/2J	D 825 S 925	D 1820 S 2040
	ST215/75R14	6PR	102/98	M	6J	D 750 S 850	D 1650 S 1870
	ST205/75R15	8PR	107/102	M	5 1/2J	D 850 S 975	D 1870 S 2150
15"	ST205/75R15	6PR	101/97	M	5 1/2J	D 730S 825	D 1610 S 1820
	ST225/75R15	8PR	113/108	M	6J	D 1000 S 1150	D 2200 S 2540
	ST225/75R15	10PR	117/112	M	6J	D 1120 S 1285	D 2470 S 2830
	ST235/80R16	10PR	123/119	M	6 1/2J	D 1360 S 1550	D 3000 S 3420
16"	ST235/85R16	10PR	125/121	M	6 1/2J	D 1450 S 1650	D 3200 S 3640



SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PM5F) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE

iGREEN All Season

All Season Tire



Excellent handling.

Lower rolling resistance.

All season tire which is applicable to different weather and road conditions.



PCR-All Season

iGREEN All Season

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
13"	145/70R13	71	T	4.50B	345	761	300	44
	145/80R13	75	T	4.00B	387	853	300	44
	155/65R13	73	T	4.50B	365	805	300	44
	155/70R13	75	T	4.50B	387	853	300	44
	155/80R13	79	T	4.50B	437	963	300	44
	165/70R13	79	T	5.00B	437	963	300	44
	175/65R13	80	T	5.00B	450	992	300	44
14"	175/70R13	82	T	5.00B	475	1047	300	44
	155/65R14	75	T	4 1/2J	387	853	300	44
	165/60R14	75	H	5J	387	853	300	44
	165/65R14	79	T	5J	437	963	300	44
	165/70R14	81	T	5J	462	1019	300	44
	175/65R14	82	T	5J	475	1047	300	44
	175/70R14 XL	88	T	5J	560	1235	340	50
	175/80R14	88	T	5J	560	1235	300	44
	185/55R14	80	H	6J	450	992	300	44
	185/60R14	82	H	5 1/2J	475	1047	300	44
	185/65R14	86	H	5 1/2J	530	1168	300	44
15"	185/70R14	88	H	5 1/2J	560	1235	300	44
	195/70R14	91	T	6J	615	1356	300	44
	165/65R15	81	T	5J	462	1019	300	44
	175/65R15 XL	88	T	5J	560	1235	340	50

iGREEN All Season

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15"	185/55R15	82	H	6J	475	1047	300	44
	185/60R15 XL	88	H	5 1/2J	560	1235	340	50
	185/65R15	88	H	5 1/2J	560	1235	300	44
	195/50R15 XL	86	H	6J	530	1168	340	50
	195/55R15	85	H	6J	515	1135	300	44
	195/60R15	88	H	6J	560	1235	300	44
	195/65R15	91	H	6J	615	1356	300	44
16"	215/65R15	96	H	6 1/2J	710	1565	300	44
	195/45R16 XL	84	H	6 1/2J	500	1102	340	50
	195/45R16 XL	84	V	6 1/2J	500	1102	340	50
	195/50R16 XL	88	V	6J	560	1235	340	50
	195/55R16	87	H	6J	545	1201	300	44
	195/55R16	87	V	6J	545	1201	300	44
	205/45R16	83	V	7J	487	1074	300	44
	205/55R16	91	V	6 1/2J	615	1356	300	44
	205/60R16 XL	96	H	6J	710	1565	340	50
	205/60R16 XL	96	V	6J	710	1565	340	50
	215/45R16 XL	90	V	7J	600	1323	340	50
	215/60R16 XL	99	H	6 1/2J	775	1709	340	50
	215/55R16 XL	97	V	7J	730	1609	340	50
	215/65R16 XL	102	V	6 1/2J	850	1874	340	50
	215/70R16	100	H	6 1/2J	800	1764	300	44
	225/55R16 XL	99	V	7J	775	1709	340	50
	225/60R16 XL	102	V	6 1/2J	850	1874	340	50
17"	245/70R16	107	H	7J	975	2149	300	44
	205/45R17 XL	88	V	7J	560	1235	340	50
	205/45R17 XL	88	W	7J	560	1235	340	50
	205/55R17 XL	95	V	6 1/2J	690	1521	340	50
	205/55R17 XL	95	W	6 1/2J	690	1521	340	50
	215/40R17 XL	87	V	7 1/2J	545	1201	340	50
	215/45R17 XL	91	V	7J	615	1356	340	50
	215/45R17 XL	91	W	7J	615	1356	340	50
	215/50R17 XL	95	V	7J	690	1521	340	50
	215/50R17 XL	95	W	7J	690	1521	340	50
	215/55R17 XL	98	V	7J	750	1653	340	50
	215/60R17 XL	100	V	6 1/2J	800	1764	340	50
	225/45R17 XL	94	V	7 1/2J	670	1477	340	50
	225/45R17 XL	94	W	7 1/2J	670	1477	340	50
	225/60R17 XL	103	V	6 1/2J	875	1929	340	50
	225/65R17	102	H	6 1/2J	850	1874	300	44
	225/65R17 XL	106	V	6 1/2J	950	2094	340	50
	235/45R17 XL	97	V	8J	730	1609	340	50
	235/45R17 XL	97	W	8J	730	1609	340	50
	235/55R17 XL	103	V	7 1/2J	875	1929	340	50
	235/55R17 XL	103	W	7 1/2J	875	1929	340	50
18"	235/65R17 XL	108	V	7J	1000	2205	340	50
	245/45R17 XL	99	V	8J	775	1709	340	50
	245/45R17 XL	99	W	8J	775	1709	340	50
	215/40R18 XL	89	W	7 1/2J	580	1279	340	50
	215/50R18 XL	96	W	7J	710	1565	340	50
	215/55R18 XL	99	V	7J	775	1709	340	50
	215/55R18 XL	99	W	7J	775	1709	340	50
	225/40R18 XL	92	V	8J	630	1389	340	50
	225/40R18 XL	92	W	8J	630	1389	340	50
	225/45R18 XL	95	V	7 1/2J	690	1521	340	50
	225/45R18 XL	95	W	7 1/2J	690	1521	340	50
	235/45R18 XL	98	W	8J	750	1653	340	50
19"	235/55R18	100	W	7 1/2J	800	1764	300	44
	245/40R18 XL	97	V	8 1/2J	730	1609	340	50
	245/40R18 XL	97	W	8 1/2J	730	1609	340	50
	225/35R19 XL	88	V	8J	560	1235	340	50
	225/35R19 XL	88	W	8J	560	1235	340	50
	225/45R19 XL	96	W	7 1/2J	710	1565	340	50
	235/35R19 XL	91	V	8 1/2J	615	1356	340	50
19"	235/35R19 XL	91	W	8 1/2J	615	1356	340	50
	245/45R19 XL	102	W	8J	850	1874	340	50

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE

LION SPORT A/T¹⁰⁰

Low noise all-weather tire



All Weather Capability.

Comfortable Quiet Ride.

Excellent Snow and Wet Braking.

Off-Road Traction.



CROSS-COUNTRY-AT

LION SPORT A/T¹⁰⁰

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15"	205/70R15	-	96	T	6J	710	1565	300	44
	235/75R15 XL	-	109	T	6 1/2J	1030	2271	340	50
	255/70R15	-	108	T	7 1/2J	1000	2205	300	44
	265/70R15	-	112	T	8J	1120	2469	300	44
	265/70R15	-	112	T	8J	1120	2469	300	44
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	2270	350	50
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	2270	350	50
	LT215/75R15	6PR	100/97	S	6J	D 730 S 800	D 1610 S 1765	350	50
	LT225/75R15	6PR	102/99	S	6J	D 775 S 850	D 1710 S 1875	350	50
	LT235/75R15	6PR	104/101	S	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
16"	235/70R16	-	106	T	7J	950	2094	300	44
	245/70R16 XL	-	111	T	7J	1090	2403	340	50
	205R16LT	8PR	110/108	Q	6J	D 1000 S 1060	D 2205 S 2335	450	65
	LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
17"	245/65R17 XL	-	111	T	7J	1090	2403	340	50
	265/65R17	-	112	T	8J	1120	2469	300	44



VAN

iGREEN VAN 4S



► For all season commercial

Various design of the 3D sipe,Optimization tread pattern stiffness distribution,The tire have good wet&ice road grip performance.

Application of spring hole,product with Excellent appearance.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
14"	175/65R14C	6PR	90/88	T	5J	D 560 S 600	D 1235 S 1323	375	54
	175/70R14C	6PR	95/93	T	5J	D 650 S 690	D 1433 S 1521	375	54
15"	195/70R15C	8PR	104/102	R	6J	D 850 S 900	D 1874 S 1984	450	65
	205/70R15C	8PR	106/104	R	6J	D 900 S 950	D 1984 S 2094	450	65
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2149 S 2271	450	65
	225/70R15C	8PR	112/110	S	6 1/2J	D 1060 S 1120	D 2337 S 2469	450	65
	185/75R16LT	8PR	104/102	R	5J	D 850 S 900	D 1874 S 1984	475	69
16"	195/60R16C	6PR	99/97	R	6J	D 730 S 775	D 1609 S 1709	375	54
	195/65R16C	8PR	104/102	R	6J	D 850 S 900	D 1874 S 1984	475	69
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	D 2039 S 2149	475	69
	205/65R16C	8PR	107/105	T	6J	D 925 S 975	D 2039 S 2149	475	69
	205/75R16C	8PR	110/108	T	5 1/2J	D 1000 S 1060	D 2205 S 2337	475	69
	215/60R16LT	6PR	103/101	T	6 1/2J	D 825 S 875	D 1819 S 1929	375	54
	215/65R16C	8PR	109/107	T	6 1/2J	D 975 S 1030	D 2149 S 2271	475	69
	215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	D 2403 S 2535	475	69
	225/65R16C	8PR	112/110	S	6 1/2J	D 1060 S 1120	D 2337 S 2469	475	69
	225/75R16C	10PR	118/116	R	6J	D 1250 S 1320	D 2756 S 2910	525	76
17"	235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	D 2535 S 2679	475	69
	215/60R17C	8PR	109/107	T	6 1/2J	D 975 S 1030	D 2150 S 2271	475	69

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PM5F) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



WINTER TIRE



SUMMER TIRE

All Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



PCR-UHP

Winter Defender UHP



- Ultra High performance snow tires with superior handling performance

Excellent snow handling performance.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15"	185/55R15 XL	86	H	6J	530	1168	340	50
	195/50R15	82	H	6J	475	1047	300	44
	195/55R15	85	H	6J	515	1135	300	44
16"	195/55R16 XL	91	H	6J	615	1356	340	50
	225/55R16 XL	99	H	7J	775	1709	340	50
	225/60R16 XL	102	H	6 1/2J	850	1874	340	50
17"	205/45R17 XL	88	V	7J	560	1235	340	50
	205/50R17 XL	93	V	6 1/2J	650	1433	340	50
	215/45R17 XL	91	V	7J	615	1356	340	50
	215/50R17 XL	95	V	7J	690	1521	340	50
	215/55R17	94	V	7J	670	1477	300	44
	225/45R17 XL	94	V	7 1/2J	670	1477	340	50
	225/50R17 XL	98	V	7J	750	1653	340	50
	225/55R17 XL	101	V	7J	825	1819	340	50
	235/55R17 XL	103	V	7 1/2J	875	1929	340	50
	225/40R18 XL	92	V	8J	630	1389	340	50
	235/45R18 XL	98	V	8J	750	1653	340	50
18"	245/40R18 XL	97	V	8 1/2J	730	1609	340	50
	235/55R19 XL	105	V	7 1/2J	925	2039	340	50
	245/40R19 XL	98	V	8 1/2J	750	1653	340	50
19"	245/45R19 XL	102	V	8J	850	1874	340	50
	255/35R19 XL	96	V	9J	710	1565	340	50
	255/40R19 XL	100	V	9J	800	1764	340	50
	255/50R19 XL	107	V	8J	975	2149	340	50
	275/40R19 XL	105	V	9 1/2J	925	2039	340	50
	255/35R20 XL	97	V	9J	730	1609	340	50
20"	275/40R20 XL	106	V	9 1/2J	950	2094	340	50
	315/35R20 XL	110	V	11J	1060	2337	340	50



PCR-HP

Winter Defender HP



- High performance snow tires with excellent braking performance

Excellent snow braking performance.

Comfortably snow driving.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
13"	155/70R13	75	T	4.50B	387	853	300	44
	155/80R13	79	T	4.50B	437	963	300	44
	165/70R13	79	T	5.00B	437	963	300	44
	175/70R13	82	T	5J	475	1047	300	44
14"	155/65R14	75	T	4 1/2J	387	853	300	44
	165/65R14	79	T	5J	437	963	300	44
	165/70R14	81	T	5J	462	1019	300	44
	175/65R14 XL	86	H	5J	530	1168	340	50
	175/70R14	84	T	5J	500	1102	300	44
	185/60R14	82	T	5 1/2J	475	1047	300	44
	185/65R14	86	T	5 1/2J	530	1168	300	44
	175/65R15 XL	88	H	5J	560	1235	340	50
15"	185/60R15 XL	88	H	5 1/2J	560	1235	340	50
	185/65R15 XL	92	H	5 1/2J	630	1389	340	50
	195/60R15 XL	92	H	6J	630	1389	340	50
	195/65R15 XL	95	T	6J	690	1521	340	50
	205/65R15 XL	99	H	6J	775	1709	340	50
	205/70R15	96	T	6J	710	1565	300	44
	205/55R16 XL	94	H	6 1/2J	670	1477	340	50
16"	205/60R16 XL	96	H	6J	710	1565	340	50
	215/55R16 XL	97	H	7J	730	1609	340	50
	215/60R16 XL	99	H	6 1/2J	775	1709	340	50
	215/65R16	98	H	6 1/2J	750	1653	300	44

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSP) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



LEAO TIRE



VAN

Winter Defender Van



► Excellent snow traction performance

Excellent snow traction performance.

Focus on driving safety of vehicles in winter.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
14"	185R14C	8PR	102/100	Q	6J	D 800 S 850	D 1764 S 1874	450	65
	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	D 1984 S 2094	450	65
15"	195/70R15C	8PR	104/102	R	6J	D 850 S 900	D 1874 S 1984	450	65
	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2337 S 2469	450	65
16"	175/75R16C	8PR	101/99	R	5J	D 775 S 825	D 1709 S 1819	475	69
	185/75R16C	8PR	104/102	R	5J	D 850 S 900	D 1874 S 1984	475	69
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	D 2039 S 2149	475	69
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	D 2205 S 2337	475	69
	215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	D 2403 S 2535	475	69
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2337 S 2469	475	69
	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	D 3086 S 3197	575	83
	235/65R16C	10PR	121/119	R	7J	D 1360 S 1450	D 3000 S 3195	575	83



PCR-UHP/HP

Winter Defender Ice I-15



► Outstanding handling performance

Direction tread pattern design providing excellent handling performance.

Directional grooves to help evacuate snow and mud.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
14"	175/65R14 XL	86	T	5J	530	1168	340	50
15"	185/60R15 XL	88	T	5 1/2J	560	1235	340	50
	185/65R15 XL	92	T	5 1/2J	630	1389	340	50
	195/65R15 XL	95	T	6J	690	1521	340	50
	195/55R16 XL	91	T	6J	615	1356	340	50
16"	205/55R16 XL	94	T	6 1/2J	670	1477	340	50
	205/60R16 XL	96	T	6J	710	1565	340	50
	215/55R16 XL	97	T	7J	730	1609	340	50
	215/60R16 XL	99	T	6 1/2J	775	1709	340	50
	215/65R16 XL	102	T	6 1/2J	850	1874	340	50
	225/55R16 XL	99	T	7J	775	1709	340	50
17"	205/50R17 XL	93	T	6 1/2J	650	1433	340	50
	225/45R17 XL	94	T	7 1/2J	670	1477	340	50
	225/50R17 XL	98	T	7J	750	1653	340	50
	225/55R17 XL	101	T	7J	825	1819	340	50
	235/45R17 XL	97	T	8J	730	1609	340	50

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PM5F) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



SUV-HP/UHP

Winter Defender Ice I-15 SUV



► Outstanding handling performance

Directional grooves design for evacuate snow and mud.

Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
15"	205/70R15	96	T	6J	710	1565	300	44
	215/75R15	100	T	6J	800	1764	300	44
	235/75R15	105	T	6 1/2J	925	2039	300	44
16"	215/65R16	98	T	6 1/2J	750	1653	300	44
	225/60R16	98	T	6 1/2J	750	1653	300	44
	235/70R16	106	T	7J	950	2094	300	44
	245/70R16	107	H	7J	975	2149	300	44
	275/70R16	114	T	8J	1180	2601	300	44
17"	215/60R17	96	T	6 1/2J	710	1565	300	44
	225/60R17	99	T	6 1/2J	775	1709	300	44
	225/65R17	102	T	6 1/2J	850	1874	300	44
	225/65R17 XL	106	T	6 1/2J	950	2094	340	50
	235/50R17	96	T	7 1/2J	710	1565	300	44
	235/55R17	99	T	7 1/2J	775	1709	300	44
	235/65R17 XL	108	T	7J	1000	2205	340	50
	245/45R17	95	T	8J	690	1521	300	44
	245/65R17	107	T	7J	975	2149	300	44
	255/45R17	98	T	8 1/2J	750	1653	300	44
	255/60R17	106	T	7 1/2J	950	2094	300	44
	265/65R17	112	T	8J	1120	2469	300	44
18"	275/65R17	115	T	8J	1215	2679	300	44
	225/50R18	95	T	7J	690	1521	300	44
	225/55R18	98	T	7J	750	1653	300	44
	225/60R18	100	T	6 1/2J	800	1764	300	44
	235/50R18	97	T	7 1/2J	730	1609	300	44
	235/55R18	100	T	7 1/2J	800	1764	300	44
	235/60R18	103	T	7J	875	1929	300	44
	235/60R18 XL	107	T	7J	975	2149	340	50
	235/65R18	106	T	7J	950	2094	300	44
	245/40R18	93	T	8 1/2J	650	1433	300	44
18"	245/45R18	96	T	8J	710	1565	300	44

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
18"	245/50R18	100	T	7 1/2J	800	1764	300	44
	245/60R18	105	T	7J	925	2039	300	44
	255/40R18	95	T	9J	690	1521	300	44
	255/45R18	99	T	8 1/2J	775	1709	300	44
	255/55R18	105	T	8J	925	2039	300	44
	255/60R18 XL	112	H	7 1/2J	1120	2469	340	50
	265/60R18	110	T	8J	1060	2337	300	44
	285/60R18	116	T	8 1/2J	1250	2756	300	44
19"	225/55R19	99	T	7J	775	1709	300	44
	235/50R19	99	T	7 1/2J	775	1709	300	44
	235/55R19 XL	105	H	7 1/2J	925	2039	340	50
	245/45R19	98	T	8J	750	1653	300	44
	245/55R19	103	T	7 1/2J	875	1929	300	44
	255/40R19	96	T	9J	710	1565	300	44
	255/45R19	100	T	8 1/2J	800	1764	300	44
	255/50R19	103	T	8J	875	1929	300	44
	255/55R19	107	T	8J	975	2149	300	44
	265/50R19	106	T	8 1/2J	950	2094	300	44
	275/35R19	96	T	9 1/2J	710	1565	300	44
	275/40R19	101	T	9 1/2J	825	1819	300	44
	275/55R19	111	T	8 1/2J	1090	2403	300	44
	245/40R20	95	T	8 1/2J	690	1521	300	44
20"	245/45R20	99	T	8J	775	1709	300	44
	245/50R20	102	T	7 1/2J	850	1874	300	44
	255/45R20	101	T	8 1/2J	825	1819	300	44
	255/50R20 XL	109	H	8J	1030	2271	340	50
	255/55R20 XL	110	T	8J	1060	2337	340	50
	265/45R20	104	T	9J	900	1984	300	44
	265/50R20	107	T	8 1/2J	975	2149	300	44
	275/40R20	102	T	9 1/2J	850	1874	300	44
	275/45R20 XL	110	T	9J	1060	2337	340	50
	285/35R20	100	T	10J	800	1764	300	44
	285/45R20	108	T	9 1/2J	1000	2205	300	44
	275/55R20	113	T	8 1/2J	1150	2535	300	44
	285/50R20	112	T	9J	1120	2469	300	44
	315/35R20	106	T	11J	950	2094	300	44
21"	265/45R21	104	T	9J	900	1984	300	44
	275/45R21	107	T	9J	975	2149	300	44
	275/50R21 XL	113	T	8 1/2J	1150	2535	340	50
	285/45R21	109	T	9 1/2J	1030	2271	300	44
21"	295/40R21	107	T	10 1/2J	975	2149	300	44

SUMMER TIRE

ALL Season (M+S) TIRE

4S (3PMSF) TIRE

Winter/Snow TIRE

Winter/Ice TIRE

Winter/Stud TIRE



PCR/SUV-HP/UHP

I-17

► Tire dedicated for car on ice-snow ground



Outstanding grip and traction performance on ice and snow surface with directional tread pattern design.

Directional grooves to help evacuate snow and mud.

Special design of suction and drainage line, quickly open the surface of the water film.

Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
13"	165/70R13	79	Q	5J	437	963	300	44
	175/70R13	82	Q	5J	475	1047	300	44
14"	165/60R14	75	Q	5J	387	853	300	44
	165/70R14	81	Q	5J	462	1019	300	44
	175/65R14	82	Q	5J	475	1047	300	44
	175/70R14	84	Q	5J	500	1120	300	44
	185/60R14	82	Q	5 1/2J	475	1047	300	44
	185/65R14	86	Q	5 1/2J	530	1168	300	44
	185/70R14	88	Q	5 1/2J	560	1235	300	44
15"	175/65R15	84	Q	5J	500	1102	300	44
	185/55R15	82	S	6J	475	1047	300	44
	185/60R15	84	Q	5 1/2J	500	1102	300	44
	185/65R15	88	Q	5 1/2J	560	1235	300	44
	195/50R15	82	S	6J	475	1047	300	44
	195/55R15	85	S	6J	515	1135	300	44
	195/60R15	88	Q	6J	560	1235	300	44
	195/65R15	91	Q	6J	615	1356	300	44
	205/65R15	94	Q	6J	670	1477	300	44
	205/70R15	96	Q	6J	710	1565	300	44
16"	195/55R16 XL	91	S	6J	615	1356	340	50
	205/55R16 XL	94	Q	6 1/2J	670	1477	340	50
	205/60R16 XL	96	Q	6J	710	1565	340	50
	215/55R16	93	Q	7J	650	1433	300	44
	215/60R16	95	Q	6 1/2J	690	1521	300	44
	215/65R16	98	Q	6 1/2J	750	1653	300	44
	225/55R16	95	S	7J	690	1521	300	44
	225/60R16	98	S	6 1/2J	750	1653	300	44

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
16"	235/70R16	106	Q	7J	950	2094	300	44
	205/45R17 XL	88	S	7J	560	1235	340	50
	205/50R17 XL	93	S	6 1/2J	650	1433	340	50
	215/45R17 XL	91	S	7J	615	1356	340	50
	215/50R17 XL	95	S	7J	690	1521	340	50
	215/55R17	94	S	7J	670	1477	300	44
	215/60R17	96	S	6 1/2J	710	1565	300	44
	225/45R17 XL	94	S	7 1/2J	670	1477	340	50
	225/50R17	94	S	7J	670	1477	300	44
	225/55R17	97	S	7J	730	1609	300	44
17"	225/60R17	99	Q	6 1/2J	775	1709	300	44
	225/65R17	102	Q	6 1/2J	850	1874	300	44
	235/55R17	99	S	7 1/2J	775	1709	300	44
	235/65R17	104	Q	7J	900	1984	300	44
	245/65R17	107	Q	7J	975	2149	300	44
	255/60R17	106	Q	7 1/2J	950	2094	300	44
	265/65R17	112	Q	8J	1120	2469	300	44
	275/65R17	115	Q	8J	1215	2679	300	44
	225/40R18 XL	92	S	8J	630	1389	340	50
	225/45R18 XL	95	S	7 1/2J	690	1521	340	50
18"	225/55R18	98	Q	7J	750	1653	300	44
	225/60R18	100	Q	6 1/2J	800	1764	300	44
	235/45R18	94	S	8J	670	1477	300	44
	235/50R18	97	Q	7 1/2J	730	1609	300	44
	235/55R18	100	S	7 1/2J	800	1764	300	44
	235/60R18	103	S	7J	875	1929	300	44
	245/40R18	93	S	8 1/2J	650	1433	300	44
	245/45R18	96	S	8J	710	1565	300	44
	245/50R18	100	Q	7 1/2J	800	1764	300	44
	245/60R18	105	Q	7J	925	2039	300	44
19"	255/40R18	95	Q	9J	690	1521	300	44
	255/55R18	105	Q	8J	925	2039	300	44
	255/60R18 XL	112	Q	7 1/2J	1120	2469	340	50
	285/60R18	116	Q	8 1/2J	1250	2756	300	44
	235/50R19	99	S	7 1/2J	775	1709	300	44



LEAO TIRE



PCR/SUV-HP/UHP

Winter Defender Grip²



- The Second studdable snow tire with outstanding braking performance on ice&snow condition

Designed for ice and snow surface.

Directional tread pattern design for excellent snow traction performance.

Great grip and handling performance on ice and snow surface.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
14"	165/65R14	79	T	5J	437	963	300	44
	165/70R14	81	T	5J	462	1019	300	44
	175/65R14 XL	86	T	5J	530	1168	340	50
15"	175/65R15	84	T	5J	500	1102	300	44
	185/60R15	84	T	5 1/2J	500	1102	300	44
	185/65R15	88	T	5 1/2J	560	1235	300	44
	195/55R15 XL	89	T	6J	580	1279	340	50
	195/65R15 XL	95	T	6J	690	1521	340	50
16"	195/45R16 XL	84	T	6 1/2J	500	1102	340	50
	205/45R16 XL	87	T	7J	545	1201	340	50
	205/55R16 XL	94	T	6 1/2J	670	1477	340	50
	205/60R16 XL	96	T	6J	710	1565	340	50
	215/60R16	95	T	6 1/2J	690	1521	300	44
	215/70R16	100	T	6 1/2J	800	1764	300	44
	225/55R16 XL	99	T	7J	775	1709	340	50
17"	205/45R17 XL	88	T	7J	560	1235	340	50
	215/55R17 XL	98	T	7J	750	1653	340	50
	225/50R17 XL	98	T	7J	750	1653	340	50
18"	225/40R18 XL	92	T	8J	630	1389	340	50
	225/45R18 XL	95	T	7 1/2J	690	1521	340	50
	245/40R18 XL	97	T	8 1/2J	730	1609	340	50
19"	225/35R19 XL	88	T	8J	560	1235	340	50
	245/40R19 XL	98	T	8 1/2J	750	1653	340	50



PCR-HP/UHP

Winter Defender Grip



- Studdable snow tire with outstanding braking performance on ice&snow condition

Designed for ice and snow surface.

Directional tread pattern design for excellent snow traction performance.

Great grip and handling performance on ice and snow surface.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
13"	155/70R13	75	T	4.50B	387	853	300	44
	155/80R13	79	T	4.50B	437	963	300	44
	165/70R13	79	Q	5.00B	437	963	300	44
	175/70R13	82	T	5.00B	475	1047	300	44
14"	175/65R14 XL	86	T	5J	530	1168	340	50
	185/60R14	82	T	5 1/2J	475	1047	300	44
	185/65R14 XL	90	T	5 1/2J	600	1323	340	50
	185/70R14 XL	92	T	5 1/2J	630	1389	340	50
15"	185/55R15 XL	86	T	6J	530	1168	340	50
	185/65R15	88	T	5 1/2J	560	1235	300	44
	195/60R15 XL	92	T	6J	630	1389	340	50
	195/65R15 XL	95	T	6J	690	1521	340	50
	205/65R15 XL	99	T	6J	775	1709	340	50
16"	205/55R16 XL	94	T	6 1/2J	670	1477	340	50
	205/60R16 XL	96	T	6J	710	1565	340	50
	215/55R16 XL	97	T	7J	730	1609	340	50
	215/60R16	95	T	6 1/2J	690	1521	300	44
	215/65R16	98	T	6 1/2J	750	1653	300	44
17"	215/50R17 XL	95	T	7J	690	1521	340	50
	215/55R17 XL	98	T	7J	750	1653	340	50
	225/45R17 XL	94	T	7 1/2J	670	1477	340	50
	225/55R17	97	T	7J	730	1609	300	44



LEAO TIRE



SUV-HP/UHP

Winter Defender Grip^{SUV}



- **Studdable snow tire with outstanding braking performance on ice&snow condition**

Designed for ice and snow surface.

Excellent snow traction performance with directional tread pattern design.

Great grip and handling performance on ice and snow surface.

Designed for SUVs.

Rim	Size	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
17"	225/65R17 XL	106	T	6 1/2J	950	2094	340	50
	235/60R17 XL	106	T	7J	950	2094	340	50
	235/65R17 XL	108	T	7J	1000	2205	340	50
	265/70R17	115	T	8J	1215	2679	300	44
18"	225/55R18	98	T	7J	750	1653	300	44
	255/55R18 XL	109	T	8J	1030	2271	340	50
	275/60R18 XL	117	T	8J	1285	2833	340	50
20"	275/45R20 XL	110	T	9J	1060	2337	340	50
	275/55R20 XL	117	T	8 1/2J	1285	2833	340	50



VAN

Winter Defender Grip Van²



- **Studdable snow tire with outstanding braking performance on ice&snow condition**

Designed for ice and snow surface.

Great grip and handling performance on ice and snow surface.

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
10"	195/55R10C	-	98/96	N	6.00B	D 710 S 750	D 1565 S 1655	625	90
13"	155R13C	8PR	90/88	R	4.50B	D 560 S 600	D 1235 S 1325	450	65
	155R13C	-	91/89	N	4.50B	D 580 S 615	D 1280 S 1355	450	65
	165R13C	-	96/94	N	4.50B	D 670 S 710	D 1475 S 1565	450	65
	175R13C	8PR	97/95	Q	5.00B	D 690 S 730	D 1520 S 1610	450	65
14"	195/50R13C	-	104/101	N	6.00B	D 825 S 900	D 1820 S 1985	650	94
	185R14C	8PR	102/100	R	5 1/2J	D 800 S 850	D 1765 S 1875	450	65
14"	185R14C	-	104/102	N	5 1/2J	D 850 S 900	D 1875 S 1985	450	65
15"	195/70R15C	8PR	104/102	R	6J	D 850 S 900	D 1875 S 1985	450	65
	215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2150 S 2270	450	65
16"	225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2335 S 2470	450	65
	185/75R16C	8PR	104/102	R	5J	D 850 S 900	D 1875 S 1985	475	69
	195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	D 2040 S 2150	475	69
	205/65R16C	8PR	107/105	R	6J	D 925 S 975	D 2040 S 2150	475	69
	215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2150 S 2270	475	69
	205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	D 2205 S 2335	475	69
	215/75R16C	10PR	116/114	R	6J	D 1180 S 1250	D 2600 S 2755	525	76
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	D 2335 S 2470	475	69
	225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	D 3085 S 3195	575	83
	235/65R16C	10PR	121/119	R	7J	D 1360 S 1450	D 3000 S 3195	575	83
17"	215/60R17C	8PR	109/107	R	6 1/2J	D 975 S 1030	D 2150 S 2270	475	69
	235/60R17C	10PR	117/115	Q	7J	D 1215 S 1285	D 2680 S 2835	525	76